


**PRODUCT DESCRIPTION**

SEPOD - a basic extrusion used to build suspended or surface mounted fixtures. To build suspended fixtures you can use DP fasteners, drywall fasteners or ready-made KLUŚ fastening kits. To surface mount the SEPOD extrusion you can use GP surface springs, KMA groove springs or the TESPO mounting track.

Patent Number: US D775,409 S

- High luminous efficiency
- Ability to create a line of light
- Easy mounting with numerous methods
- Can be combined into straight and broken linear runs

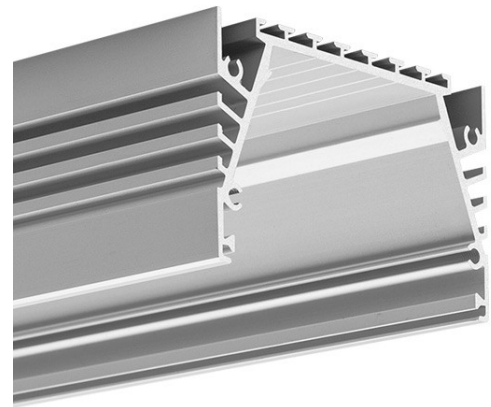


Fill empty fields

Product nr.	
Fixture type	
Company	
Job name	
Date	


**TECHNICAL SPECIFICATION**

18018ANODA_1	Silver anodized	39.4"
18018ANODA_2	Silver anodized	78.75"

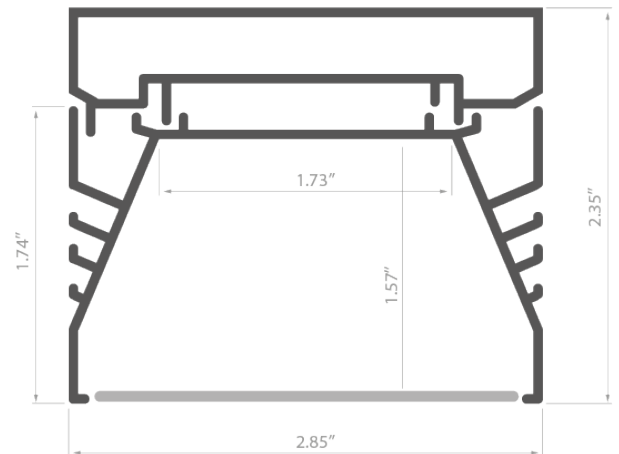




## RELATED EXTRUSIONS



Ref: 18020


## RELATED PRODUCTS

### COVERS




Ref: 17082

80°



Ref: 17081

80°




Ref: 17083

110°



### END CAPS




Ref: 24106


ACCESSORIES



Ref: 42717



Ref: 42512




Ref: 42614




Ref: 42719



Ref: 42718




Ref: 00293




Ref: 42716




Ref: 42728



Ref: 42731V1



Ref: 70240




Ref: 42203



Ref: 42256



Ref: 42204



Ref: 42205




Ref: 42250

**COUPLERS** - connection methods for profiles




L135




L135PW




L135PZ




L90




L90PW




L90PZ




T135L




T135R



T90



X135



X90