

PRODUCT DESCRIPTION

EASY AND FAST MOUNTING OF STOS FIXTURES GROOVE FOR CABLE ROUTING

TEST-36 mounting track is a low 3,6 mm (0.14") mounting strip for STOS profiles. After the TEST-36 and STOS have been mounted, we obtain a low internal groove in which a 2 mm (0.07") Fi cable can be routed. The STOS extrusion is attached to the TEST-36 strip with TEKNIK clips, arranged in pairs. The pairs of clips should be applied every 20 cm (7.87"). TEST-36 has its own end cap, which nicely complements the shape of the STOS end cap.

The TEST-36 strip is mounted using suitable screws. The location for drilling screw holes is marked by the groove inside the profile. The mounting surface for TEST-36 should be even. If there is major roughness of the mounting surface, the mounting screws should be located in the areas where the profile meets the surface (bumps).

- Simplifies mounting a dedicated lighting fixture


Fill empty fields

Product nr.	
Fixture type	
Company	
Job name	
Date	



TECHNICAL SPECIFICATION

B6639ANODA_1	Silver anodized	39.4"
B6639ANODA_2	Silver anodized	78.75"

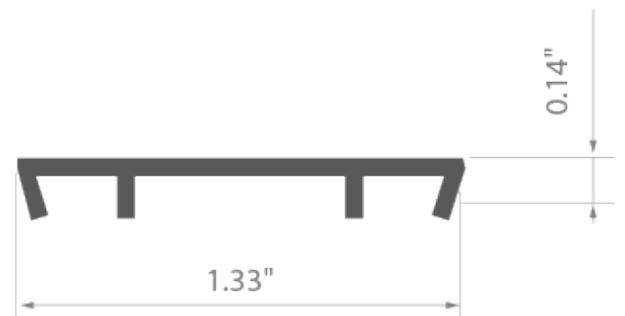

RELATED EXTRUSIONS



Ref: B4369

RELATED PRODUCTS

END CAPS



Ref: 24040

ACCESSORIES



Ref: 70240




Ref: 24003


COUPLERS - connection methods for profiles




L135




L135PW




L135PZ




L90




L90PW




L90PZ




T135L




T135R



T90



X135



X90