

PRODUCT DESCRIPTION

EASY AND FAST MOUNTING OF TRIADA FIXTURE GROOVE FOR CABLE ROUTING


TETRA-78 mounting track is a mounting strip for TRIADA extrusion. After TETRA-78 and TRIADA have been mounted, we obtain a groove inside high enough to route 8 mm (0.31") Fi cables in it. TRIADA extrusion is attached to TETRA-78 strip with TEKNIK clips, arranged in pairs. The pairs of the clips should be applied every 20 cm (7.87").

TETRA-78 has its own end cap, which nicely complements the shape of TRIADA end cap. TETRA-78 track is mounted using suitable screws. The location of the drilling of holes for screws is marked by the groove inside the profile. The mounting surface for TETRA-78 should be even. If there is some major roughness of the surface, mounting screws should be located in the places of profile-surface adhesion (bumps).

- Simplifies mounting a dedicated lighting fixture and provides space to conceal wires


Fill empty fields

Product nr.	
Fixture type	
Company	
Job name	
Date	

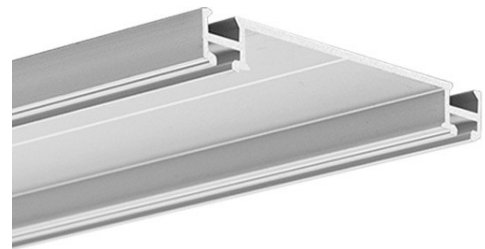


TECHNICAL SPECIFICATION

W4508ANODA_1	Silver anodized	39.4"
W4508ANODA_2	Silver anodized	78.75"

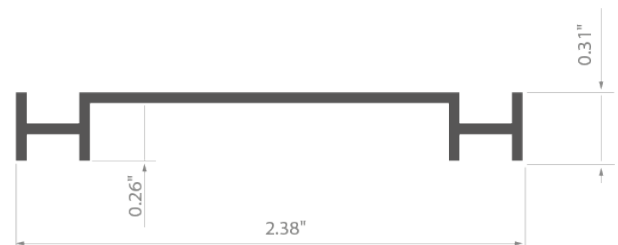

RELATED EXTRUSIONS



Ref: B4476


RELATED PRODUCTS

END CAPS



Ref: 24043

ACCESSORIES



Ref: 70240




Ref: 24003


COUPLERS - connection methods for profiles




L135




L135PW




L135PZ




L90




L90PW




L90PZ




T135L




T135R



T90



X135



X90