


**PRODUCT DESCRIPTION**

The three-channel extrusion provides more light output. Due to the possibility of installing three strips inside the extrusion it can be used as a primary energy-efficient light source. IP 67 version can be also used as an outdoor lighting for elevations or architectural elements of gardens.

Patent Number: US D695,953 S

- Construction of high-performance lighting fixtures
- Good heat dissipation
- Three-channel housing for flexible or hard LED strips that are 8-12mm wide (0.47")
- Multi-purpose

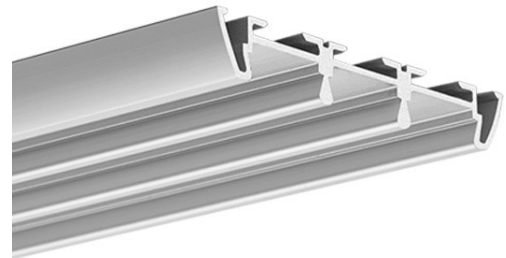

Fill empty fields


Product nr.	
Fixture type	
Company	
Job name	
Date	

**TECHNICAL SPECIFICATION**


B4476ANODA_1	Silver anodized	39.4"
B4476ANODA_2	Silver anodized	78.75"



## RELATED EXTRUSIONS




Ref: W4476



Ref: W4508


## RELATED PRODUCTS

### COVERS




Ref: 00158

110°





Ref: 17079

90°



Ref: 00157

110°



Ref: 17078

90°



### END CAPS



Ref: 00090


ACCESSORIES



Ref: 42513



Ref: 42257



Ref: 70240



Ref: 24003




Ref: 42251


**COUPLERS** - connection methods for profiles




L135



L135PW




L135PZ




L90




L90PW




L90PZ




T135L




T135R



T90



X135



X90