WORK

BPMLighting®

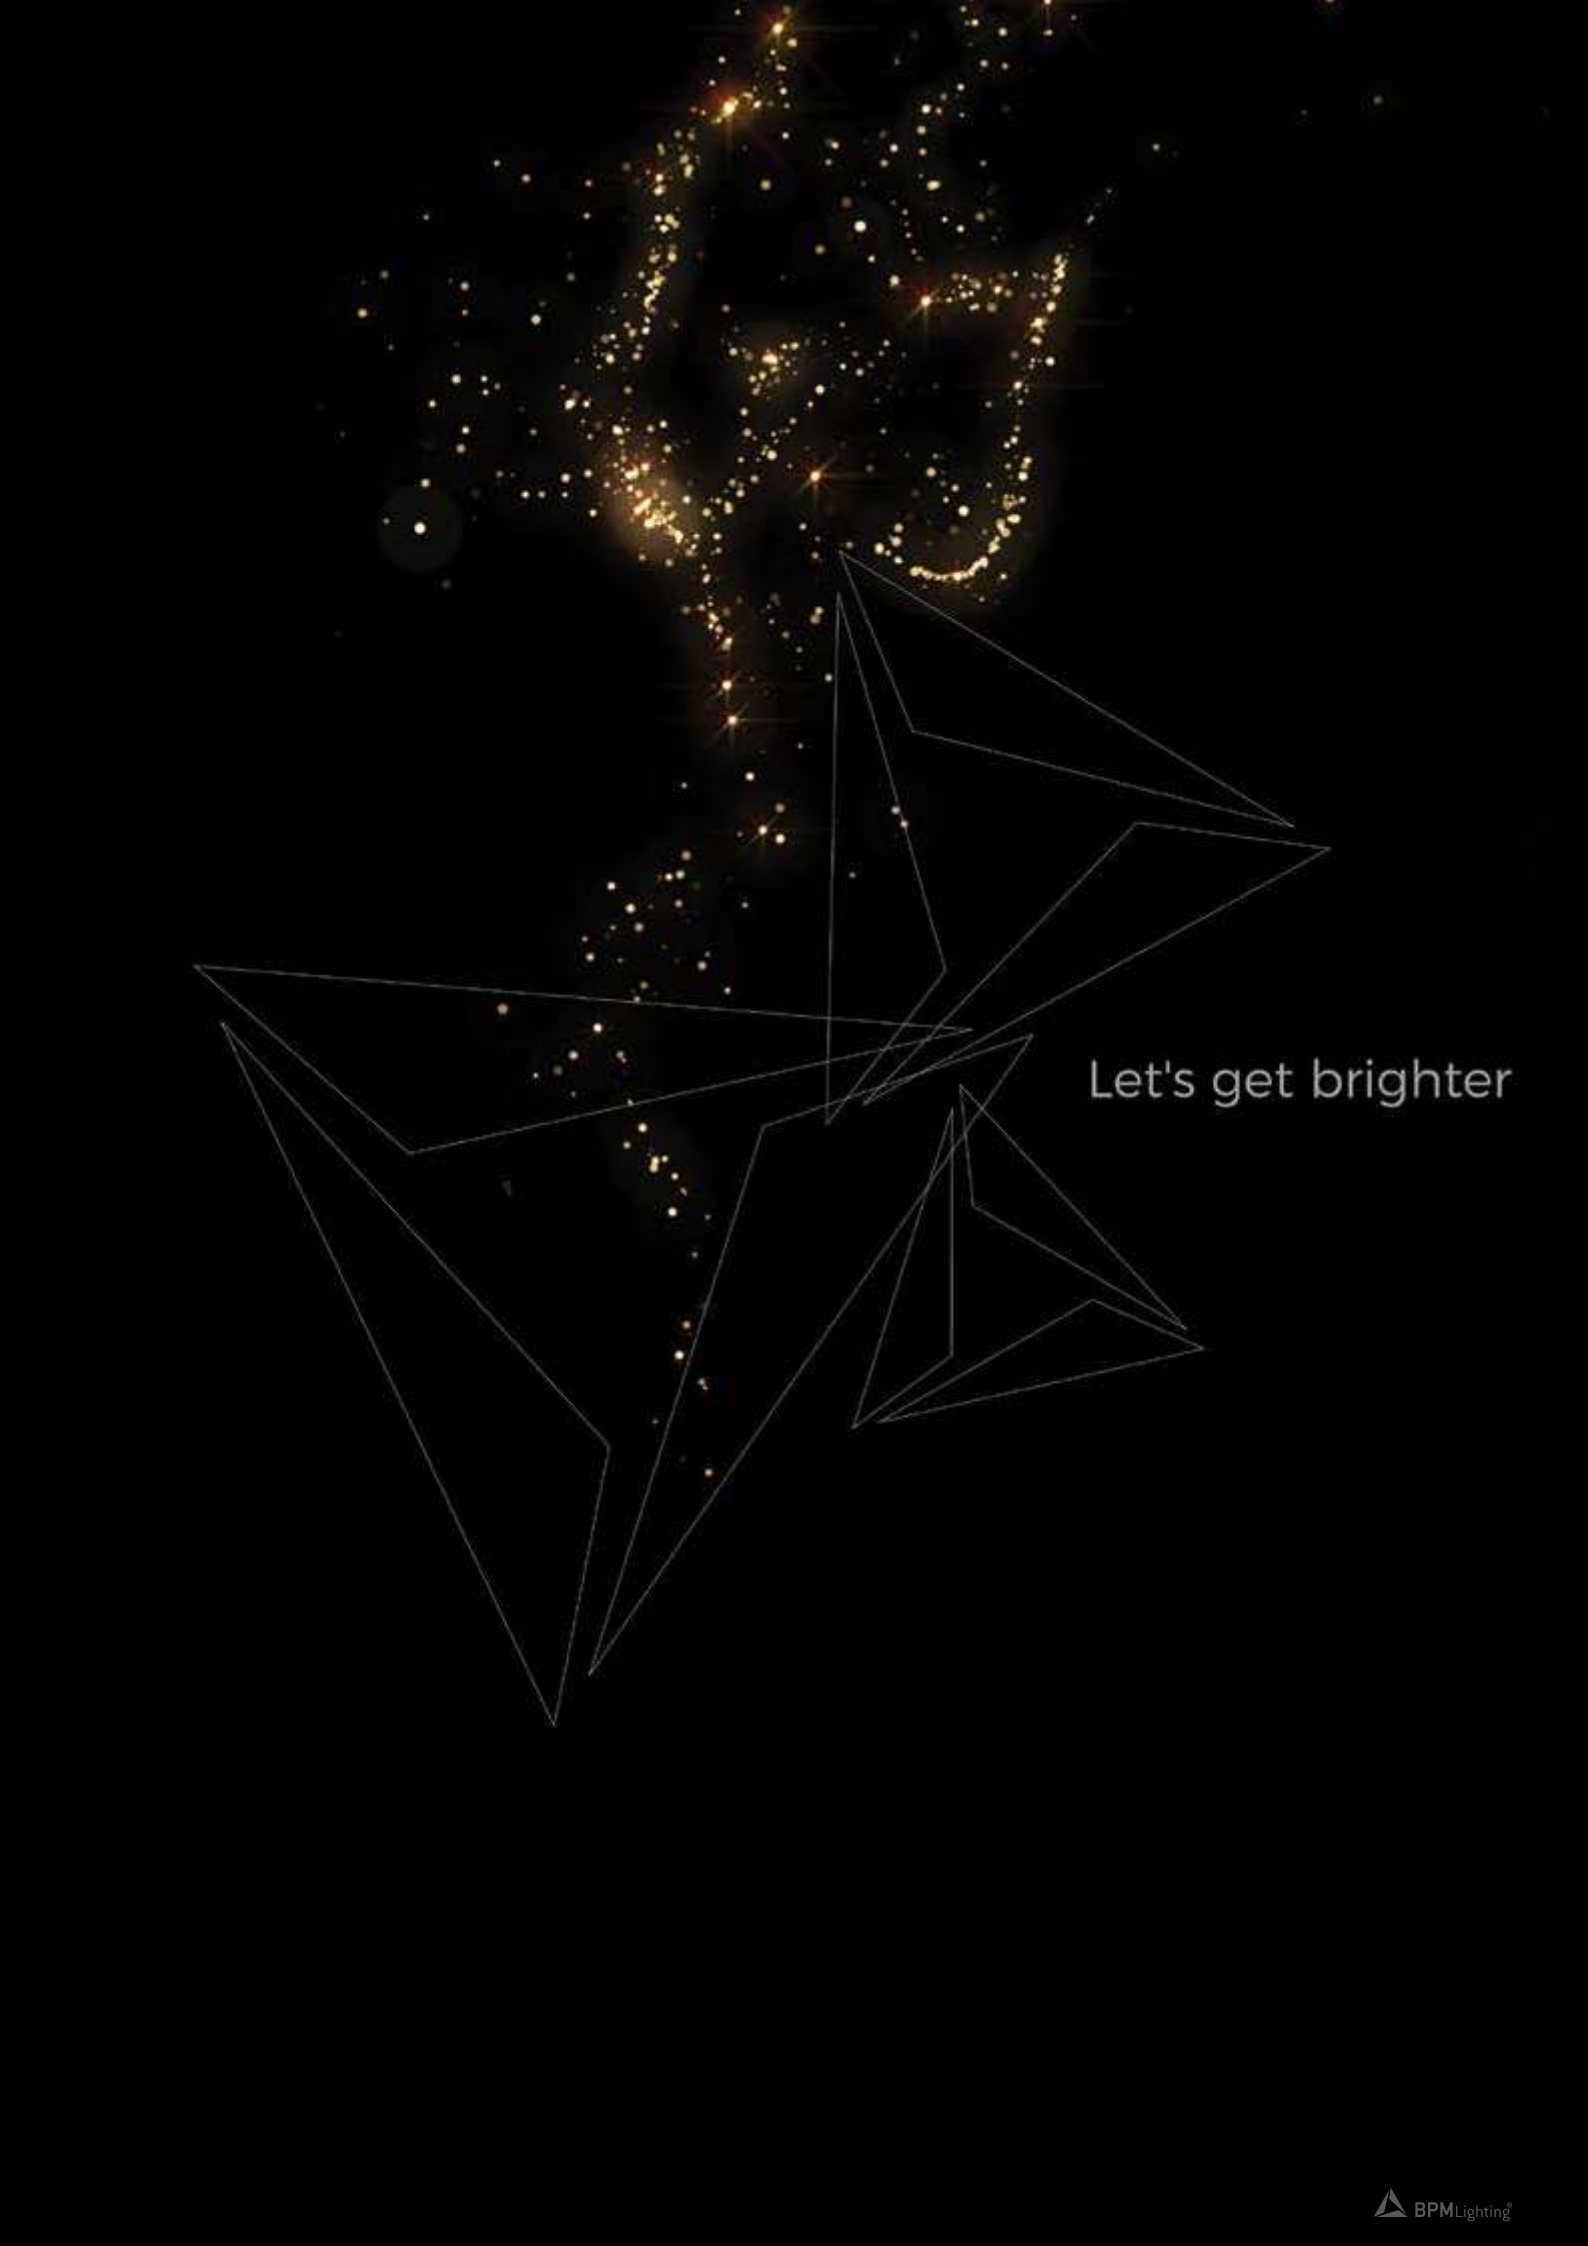
Let's get brighter

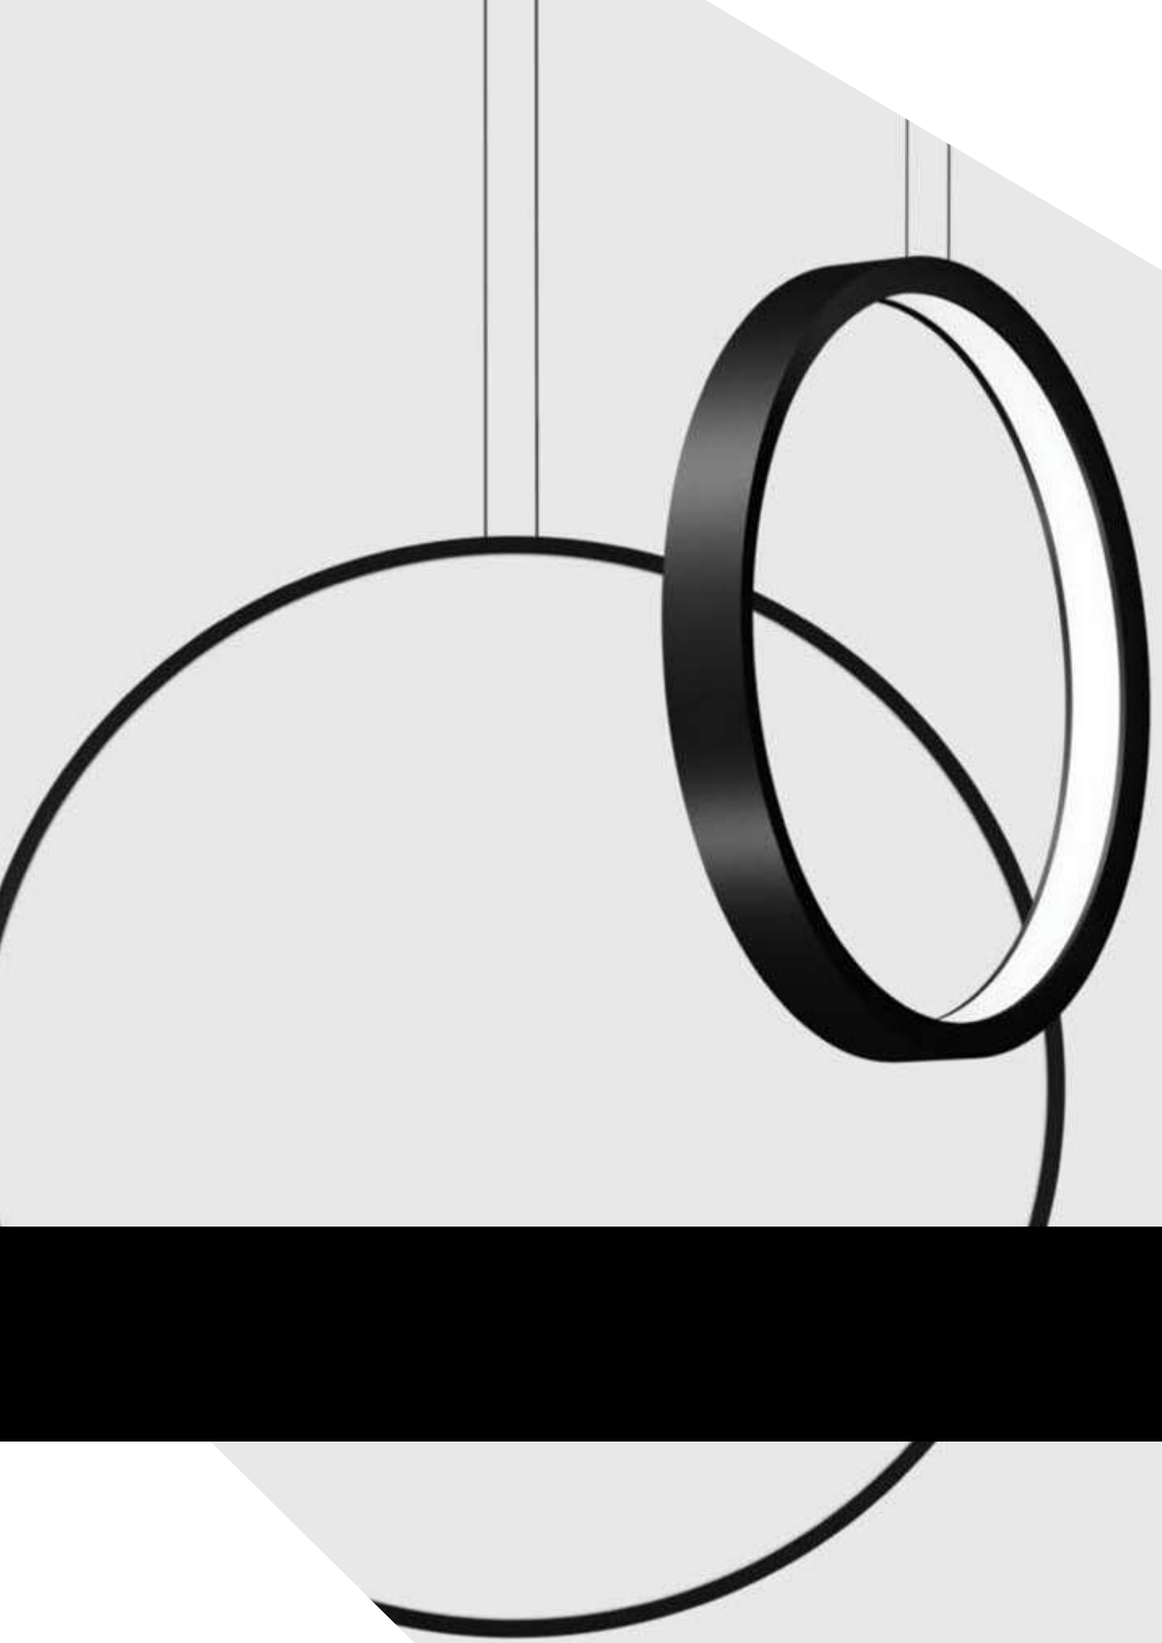

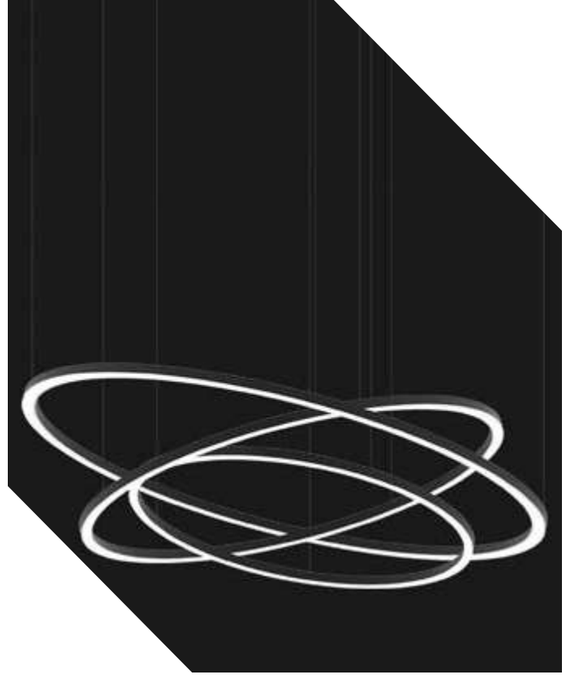

RE-SET

A re-set on principle.
Driven by a nonconformist spirit.

Updated references and new additions to our catalogue that cover global projects and unique collections such as Outdoor CEM and BPM Acoustic.

That's how we do things. There is no other option. Developing increasingly specialised products and more efficient solutions. So the future will always be brighter.

Resetear por principios.
Por impulso y por espíritu inconformista.

Referencias que se actualizan, familias que se completan para abarcar proyectos globales y nuevas colecciones como Outdoor CEM y BPM Acoustic que se incorporan a nuestro catálogo.

Ese es el camino. No hay otro. Evolucionar en productos cada vez más especializados y en soluciones más eficientes. El Futuro será, siempre, más brillante.

Bernardo Palomares

RE-ADY

We have re-set and regrouped to continue as your lighting partner of choice. With a new brand image, updated virtual channels and a new catalogue concept that makes sure everyone is on the same page.

Sharing the creative process closely, co-creating and making it happen. Giving free rein to creativity, without limits, open to everyone's opinions and desires. At BPM Lighting, we know what we are doing, and the result is brilliant when we do it together. "Let's get brighter."

Reseteamos, reordenamos y estamos listos para seguir siendo su partner industrial de referencia. Imagen de marca renovada, nuestras ventanas virtuales actualizadas y un nuevo concepto de catálogo pensado para un trabajo conjunto más técnico y funcional.

Crear juntos, estar más cerca, compartir, cooperar, sumar. Dar rienda suelta a la creatividad, sin límites, abiertos a cualquier punto de vista. En BPM Lighting lo tenemos claro: Lo haremos juntos, y el resultado será brillante. "Let's get brighter".

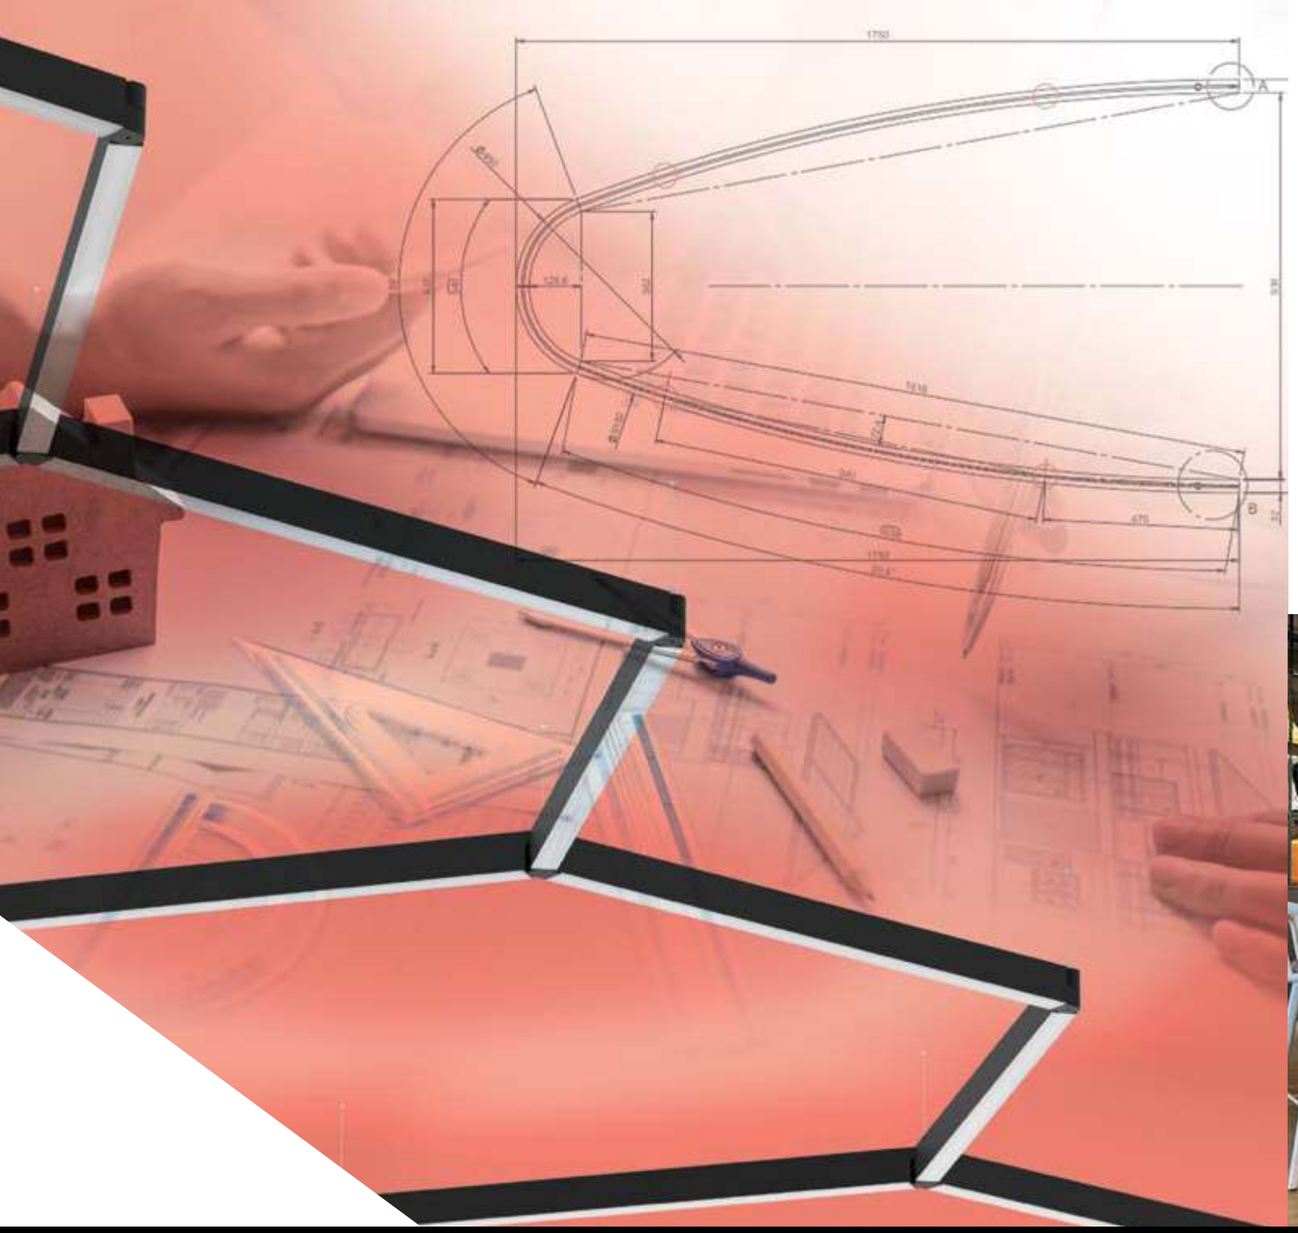

The idea and the result. And avant-garde technology at your service along the way. Our team of experts at BPM Lighting have the experience and resources you need to offer superb lighting products that adapt to every need.

Whatever the project, whether for a small room at home or a large retail establishment, we ensure a perfect combination of design and efficiency, both inseparable qualities for shaping your decorative scheme.

At BPM Lighting, personal service and customisation are among our main strengths: lighter finishes, more colourways, innovative fixtures, and versatile installation systems. Our mission is to satisfy your requirements for a dazzling finish.

La idea y el resultado. Y en el proceso, la tecnología más puntera a su servicio. En BPM Lighting contamos con un equipo profesional altamente especializado, con la experiencia y los recursos que nos permiten ofrecer soluciones lumínicas del más alto nivel y adaptadas a cada necesidad.

En cualquier proyecto, sea para una pequeña estancia del hogar o una gran superficie comercial, diseño y eficiencia han de encajar de manera perfecta, son cualidades inseparables, forman parte de una misma pieza que se amolda a cada instalación.

En BPM Lighting el trabajo personalizado y la costumización son pilares fundamentales: acabados más ligeros, mayor gama de colores, apliques innovadores, sistema de instalación versátiles. El objetivo: encajar las posibilidades para conseguir un acabado deslumbrante.

RE-DESIGN

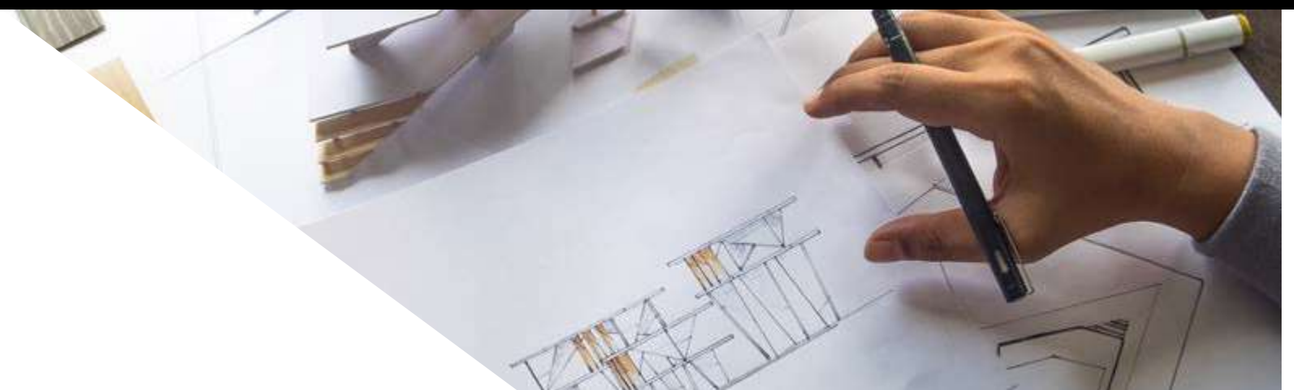

The best of BPM Lighting is yet to come. However, resting on our laurels is not part of our corporate philosophy. We never stop building new families, making improvements and evolving our existing success stories. It is never enough.

That's why we have an R&D+i department with its own laboratory. That's where we design, analyse, test and optimise our designs to create trend-setting advanced lighting solutions.

State-of-the-art technology combined with our expert know gives us a competitive advantage, added value that keeps us at the forefront of the industry to offer stand-out services and products.

Lo mejor de BPM Lighting está aún por llegar. Acomodarse no entra en nuestra filosofía de empresa. Mientras desarrollamos nuevas familias se contemplan sus mejoras y evoluciones. Nunca es suficiente.

Por ello contamos con un departamento de I+D+i dotado de laboratorio propio. En él diseñamos, estudiamos, testamos y optimizamos nuestros productos para obtener como resultado soluciones lumínicas avanzadas que marquen tendencia en nuestro sector.

La tecnología punta, combinada con el know how de nuestros desarrolladores garantizan esa ventaja competitiva, ese valor añadido que nos permite ir por delante en oferta de servicios y productos.

RE-THINK

Bespoke. We co-create to achieve excellence.
BPM Bespoke Madrid participates in the global BPM Lighting project as a meeting point for professional lighting experts, creating unique lighting solutions customised and designed for each project. BPM Bespoke London was the first of these spaces to revolutionise ways of working together on projects. The new premises in Las Rozas, Madrid draws on our experiences and is adapted to the needs of the domestic market. Interior designers, architects, and builders are welcomed with open arms to a working forum with an open horizon, without limitations, where dialogue amplifies everyone's capabilities. And the result will be brilliant.

But the revolution will also be taken beyond European borders to the USA, where BPM Lighting is in the throes of making a mark with specific products and sales strategies. A new market is broadening our horizons and will herald a new era for our business project.

BESPOKE LONDON

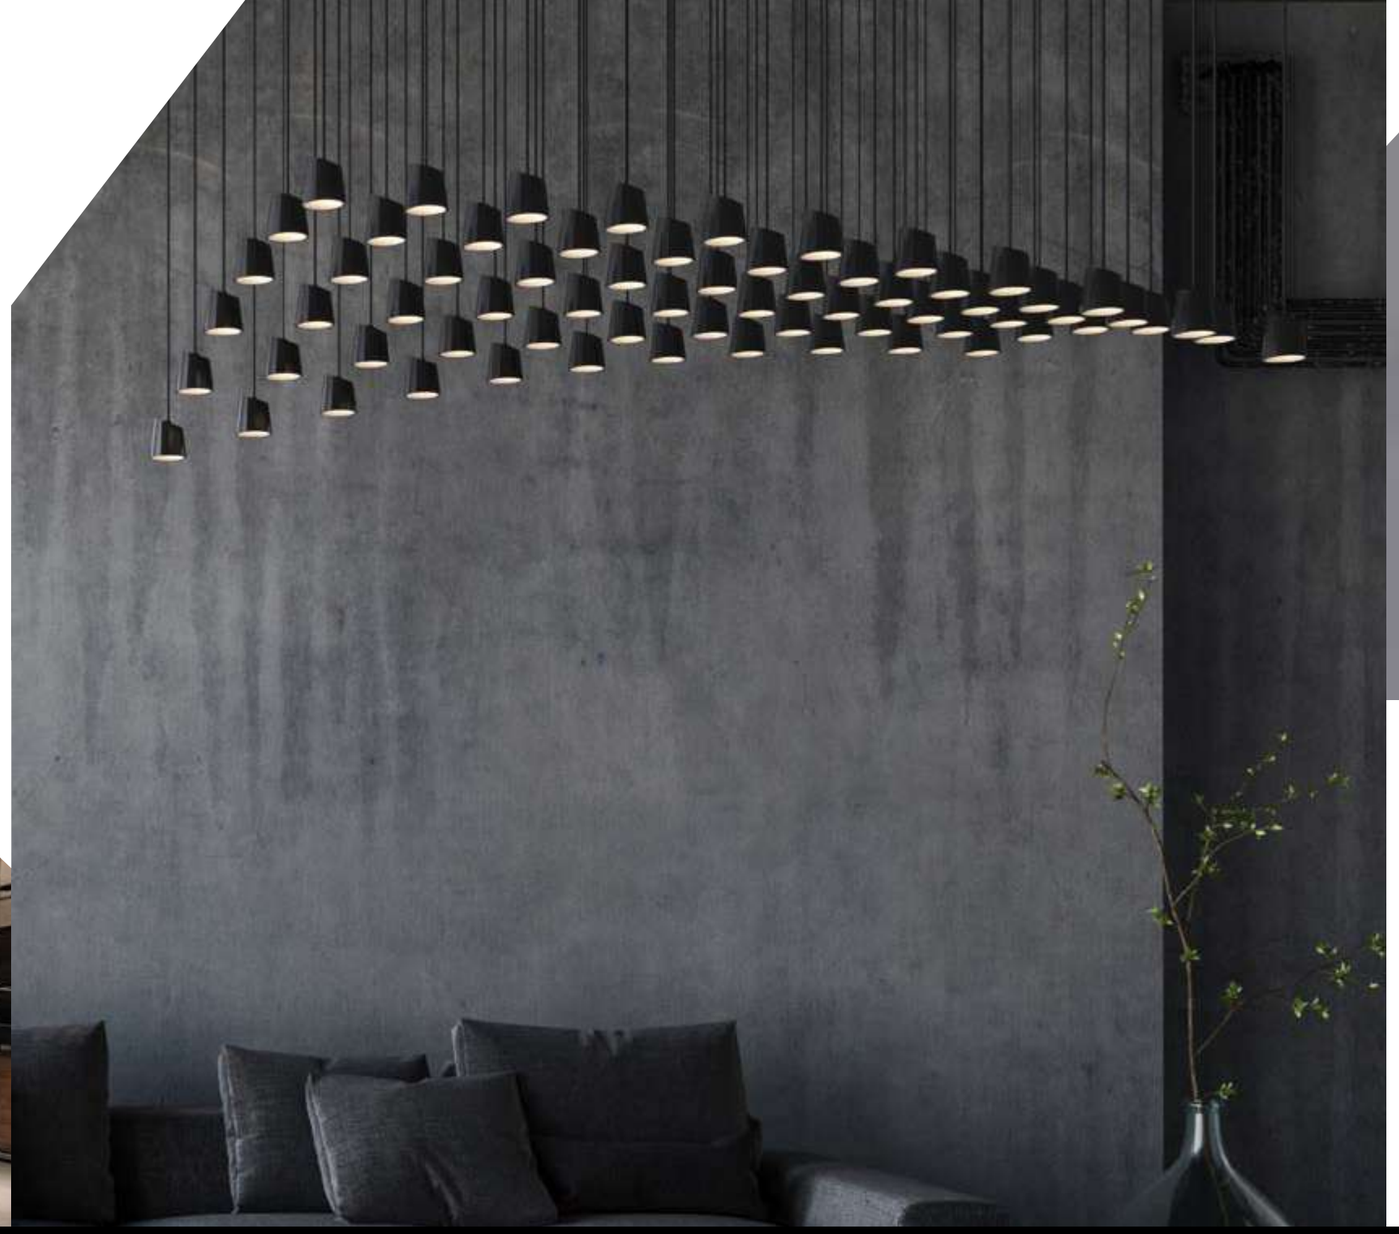

BESPOKE MADRID

Bespoke. O lo que es lo mismo: co-crear para buscar la excelencia.
BPM Bespoke Madrid se suma al proyecto global de BPM Lighting para convertirse en un punto de encuentro de profesionales que buscan soluciones lumínicas únicas, personalizadas y pensadas para cada proyecto específico. BPM Bespoke London fue el primer espacio de estas características que supuso una auténtica revolución en la manera de concebir proyectos de forma conjunta. Las nuevas instalación de Las Rozas en Madrid se nutre de la experiencia adquirida adaptándose a las necesidades del mercado nacional.

Interioristas, arquitectos, proyectistas, constructores tienen las puertas abiertas de un foro de trabajo en el que todo está por hacer, sin limitaciones, donde diálogo servirá para amplificar capacidades. Y el resultado será brillante.

RE-VOLUTION

Sustainability and health values. Rather than paying lip service to these qualities, we have made a real commitment. At BPM Lighting, we take on our role as manufacturers to endorse our commitment to the environment and people's well-being.

We abide by certifications, standards and guidelines such as the International Association of Lighting Designers (ALD) and Lighting Industry Resource Council (LIRC) for WELL rating systems.

Resources may be limited, but, fortunately, creativity is boundless. Re-think production methods, and offer lighting solutions in line with health and well-being. That's the way we work.

Sostenibilidad y valores de la salud. No es una ambiciosa declaración de intenciones, es la única opción viable. En BPM Lighting asumimos nuestro papel de fabricantes para refrendar el compromiso con el medio ambiente y con el bienestar de las personas.

Para ello nos servimos de pautas y estándares certificados como IALD (Asociación Internacional de Diseñadores de Iluminación) y el LIRC (Consejo de Recursos de la Industria de la Iluminación) para los sistemas de calificación WELL.

Los recursos son limitados, pero por suerte la creatividad no. Repensar las formas de producir, ofrecer soluciones lumínicas en consonancia con la salud y el bienestar. En eso trabajamos.

RE-SPECT

RE-IMAGINE

Our culture balance between tradition, innovation, tech development and industrial engineering where design is translated into a product with the utmost technical precision, lasting good looks and a high standard of technological components.

All this at the service of an idea, because our goal is to help you design the perfect Lighting solution for your project.

Let's get brighter, let's co-create, let us help you with what we do best, light!

Nuestro ADN apuesta por el diseño y la fabricación, una misma cultura que equilibra la tradición, la innovación, el desarrollo tecnológico y la ingeniería industrial. Y todo ello se traduce en un producto que tiene la máxima precisión técnica, una estética duradera y un alto estándar tecnológico.

Todo ello al servicio de una idea, porque nuestro objetivo es diseñar la perfecta solución lumínica para tu proyecto.

¡Co-creemos, brillemos juntos, déjanos ayudarte con lo que mejor sabemos hacer, luz!

VISUAL INDEX

ALABAMA	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
ALABAMA SUPER SLIM 310001	new PAG. 58	new PAG. 58				
ALABAMA SUPER SLIM TILT 310007	new PAG.62					
ALABAMA SLIM 310002	new PAG. 66	new PAG. 66				
ALABAMA SLIGHT 10192	PAG. 70	PAG. 70				
ALABAMA SLIGHT SQ 10194	PAG. 74	PAG. 74				
ALABAMA 10158	PAG. 78	PAG. 78	PAG. 396	PAG. 580		

ALTAIR	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
ALTAIR 10172	PAG. 82	PAG. 82		PAG. 584		

OHIO	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
OHIO 10188	new PAG. 86	new PAG. 86	PAG. 400	PAG. 588		
OHIO SQ 10204			PAG. 404	PAG. 592		

VISUAL INDEX

FLORIDA	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
FLORIDA 10190	PAG. 90	PAG. 90	PAG. 408	PAG. 596		
FLORIDA SQ 10191	PAG. 94	PAG. 94	PAG. 412	PAG. 600		

ALBERTA	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
ALBERTA INSIDE 10243	new PAG. 98	new PAG. 98				
ALBERTA INSIDE VERTICAL 310008	new PAG. 102					
ALBERTA INSIDE VTILT 310009	new PAG. 106					
ALBERTA DUE 10250	new PAG. 110					
ALBERTA DUE MOVE 310004	new PAG. 114					
ALBERTA SOFT 10217	PAG. 118	PAG. 118	PAG. 416			
ALBERTA SLIGHT 10193	PAG. 124	PAG. 124				
ALBERTA SLIGHT ECCENTRIC 310005	new PAG. 128	new PAG. 128				
ALBERTA 10176	PAG. 132		PAG. 420	PAG. 604		

VISUAL INDEX

OKKO MODULAR	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
OKKO MODULAR 10254	new PAG. 138	new PAG. 138				
OKKO PLUS MODULAR 10252	new PAG. 142	new PAG. 142				

OKKO PLUS MODULAR	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
OKKO MODULAR LINE 210012 | 410012	new PAG. 150	new PAG. 150	new PAG. 468			
OKKO PLUS MODULAR LINE 210013 | 410013	new PAG. 154	new PAG. 154	new PAG. 470			

EYE	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
EYE 210016	SOON PAG. 158	SOON PAG. 158		SOON PAG. 610		

ALARIK	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
ALARIK MINI 210006	new PAG. 164	new PAG. 164		new PAG. 616		
ALARIK MINI ROUND 210004	new PAG. 170					
ALARIK SLIM 20224	new PAG. 178	new PAG. 178	new PAG. 428	new PAG. 622		
ALARIK SLIM ROUND 210019	new PAG. 184	new PAG. 184				
ALARIK 10225	PAG. 190	PAG. 190		PAG. 628		

VISUAL INDEX

MODULIGHT	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
MODULIGHT 10210	PAG. 196	PAG. 196	PAG. 434	PAG. 634		

OKKIA	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
OKKIA 210007	new PAG. 202	new PAG. 202				
OKKIA PLUS 210017	new PAG. 206					

LINGGO	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
LINGGO MINI 210003	new PAG. 210	new PAG. 210				
LINGGO 210002	new PAG. 214	new PAG. 214				

BUBBLE	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
BUBBLE 210010	new PAG. 218	new PAG. 218				

EDGE	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
EDGE 210014		new PAG. 222				

VISUAL INDEX

ALBA	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
ALBA MINI 10211	PAG. 226	PAG. 226	PAG. 440	PAG. 640		
ALBA 10160	PAG. 230	PAG. 230	PAG. 444	PAG. 644	PAG. 760	PAG. 786
ALBA NOVUS 210011	PAG. 234					
ALBA DOUBLE 10215	PAG. 238					PAG. 790
ALBA ASIMETRIC 210009	PAG. 242	PAG. 242	PAG. 448	PAG. 648		PAG. 794
ALBA PLUS 10178	PAG. 246	PAG. 246	PAG. 452	PAG. 652	PAG. 764	
ALBA PLUS ASIMETRIC 210008	PAG. 250	PAG. 250	PAG. 456	PAG. 656		
BOLD	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
BOLD 210001	PAG. 254	PAG. 254	PAG. 460			
BOLD LINE 210015	PAG. 254	PAG. 254	 PAG. 460			
TRIBOLD 210018	PAG.258	PAG. 258				
WING	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
WING 10200	PAG. 262	PAG. 262	PAG. 464	PAG. 660		
ALZIRA	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
ALZIRA 10169	PAG. 266					PAG. 798

VISUAL INDEX

ACOUSTIC	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
ACOUSTIC ALZIRA 230002	PAG. 272					PAG. 802
ACOUSTIC ALBA 230004	PAG. 276	PAG. 276				
ACOUSTIC LINGGO MINI 230007	PAG. 280					
ACOUSTIC LAMBDA 230001	PAG. 284	PAG. 284				
ACOUSTIC ALBA MINI 230008	PAG. 288					
ACOUSTIC ALARIK SLIM 230009	PAG. 292					
ACOUSTIC OKKO 230003	PAG. 298					
ACOUSTIC ALBERTA SOFT 230010	 PAG. 302					
ACOUSTIC ALABAMA 460001 | 460003	PAG. 306					
ACOUSTIC KLIMT FIX 460002 | 460004	 PAG. 310					
ACOUSTIC ACCESORIES AC | RD | SQ | VT | FL | MD	PAG. 314	PAG. 314				PAG. 806

VISUAL INDEX

MARTORELL	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
MARTORELL 20115	PAG. 322	PAG. 322	PAG. 494	PAG. 676	PAG. 744	
MARTORELL MOVE 20110		PAG. 324	PAG. 496			
MARTORELL TUBE MOVE 20138		PAG. 326			PAG. 746	
MARTORELL MINI CRATE 20175		PAG. 328	PAG. 502			
MARTORELL CRATE 20176		PAG. 330	PAG. 504			
MARTORELL SQ 20132		PAG. 332				
MARTORELL SQ2 20133		PAG. 332				
MARTORELL TARREGA 20117			PAG. 498	PAG. 678		
MARTORELL TARREGA SQ 20116			PAG. 500	PAG. 678		
MARTORELL TARREGA SQ2 20119			PAG. 500			
MARTORELL TUBULAR 20 | 40 | 60 20125 | 20192 | 20196	PAG. 334	PAG. 334				
MARTORELL TUBULAR TILT 20195		PAG. 336				

VISUAL INDEX

PATRICIA TK	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
PATRICIA TK 30514					PAG. 736	

GEO	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
GEO 30511		PAG. 342	PAG. 512		PAG. 750	

KLIMT	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
KLIMT 20134		PAG. 338	PAG. 508		PAG. 748	
KLIMT FIX 20135		PAG. 340	PAG. 510			

LUK	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
LUK FREIR 20018		PAG. 344	PAG.514	PAG. 680		
LUK FREIR 2 20019		PAG. 344	PAG. 514	PAG. 680		
LUK 20028			PAG. 516			
LUK 2 20071			PAG. 516			
LUK CRUSADER 20082		PAG. 346			PAG. 752	
LUK HAWKEYE 20083		PAG. 348			PAG. 754	
LUK HAWKEYE 2 20084		PAG. 348			PAG. 754	

VISUAL INDEX

CUBE	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
CUBE SQ 8201		 PAG. 354	 PAG. 518	 PAG. 682		
CUBE SQ2 8202		 PAG. 354	 PAG. 518	 PAG. 682		
CUBE SQ3 8203		 PAG. 354	 PAG. 518	 PAG. 682		
CUBE TUBE 9050 | 9052	 PAG. 350	 PAG. 350			 PAG. 756	
CUBE TUBE MOVE 9051 | 9053	 PAG. 352	 PAG. 352				
CUBE SPOT 3120			 PAG. 522			
CUBE SPOT 2 3131			 PAG. 522			
CUBE SPOT MOVE 3121			 PAG. 524			
CUBE SPOT 2 MOVE 3136			 PAG. 524			
CUBE SPOT SQ MOVE 3134			 PAG. 526			
CUBE SPOT SQ 2 MOVE 3135			 PAG. 526			

ORACLE	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
ORACLE 20087	 PAG. 360	 PAG. 360			 PAG. 758	

VISUAL INDEX

FACE	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
FACE TUBULAR 20205	new PAG. 364	new PAG. 362	new PAG. 506			
FACE TUBULAR SPAC 20207	new PAG. 366					
FACE KIERA 20204	new PAG. 368					
FACE KIERA CEMENT 20208	new PAG. 370					
FACE IRIS 20203	new PAG. 372					

SUBLIM	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
SUBLIM 20206	new PAG. 374					

GALANTA	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
GALANTA DEEP 410001			new PAG. 492			
GALANTA BONETE 20222	new PAG. 376					

VENICE	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
VENISE 410011	new PAG. 378					

VISUAL INDEX

LENT	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
LENT MODULAR 10216			PAG. 472	PAG. 666		
LENT MOTION 10212			PAG. 474			

SASSY	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
SASSY 410002			IP65 new PAG. 476	IP65 new PAG. 668		
SASSY SQ 410003			IP65 new PAG. 482	IP65 new PAG. 672		

VADI	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
VADI 3177			PAG. 534			

ROY	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
ROY 20154			PAG. 538			

CAN REVIEW	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
CAN REVIEW 20149			PAG. 528			

ALDAIA	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
ALDAIA 20157			PAG. 530			
ALDAIA SQ 20120			PAG. 532			

VISUAL INDEX

VIO	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
VIO 20185			new PAG. 488			
VIO DEEP 20186			new PAG. 488			
VIO DOME 20183			new PAG. 488			
VIO SQ 20181			new PAG. 488			
VIO MOVE 20184			new PAG. 488			
VIO DEEP MOVE 20187			new PAG. 488			
VIO DOME MOVE 20182			new PAG. 488			
VIO SQ MOVE 20180			new PAG. 488			

VISUAL INDEX

CATLI	PENDANT	.PN	SURFACE	.SR	RECESSED FRAME	.RF	TRIMLESS	.TR	TRACK	.TK	WALL SURFACE	.WS
CATLI 3010			PAG.358		PAG. 560							
CATLI SQ 3011			PAG. 358		PAG. 562							
CATLI SQ2 3012					PAG. 564							
CATLI SQ3 3013					PAG. 566							
CATLI HALKA 3017					PAG. 568							
CATLI HALKA SQ 3021					PAG. 570							
CATLI ODALKI 3018					IP65 PAG. 572							
CATLI CLASSIC 3005					IP65 PAG. 574							
CATLI CLASSIC SQ 3006					PAG. 576							
CATLI CARE 3000					PAG. 576							
CATLI CARE 2 3001												

VISUAL INDEX

SU	PENDANT	.PN	SURFACE	.SR	RECESSED FRAME	.RF	TRIMLESS	.TR	TRACK	.TK	WALL SURFACE	.WS
SU 3149					IP65 PAG. 540							
SU SQ 3150					IP65 PAG. 540							
SU OTIS 3234					IP65 PAG. 542							

BASIT	PENDANT	.PN	SURFACE	.SR	RECESSED FRAME	.RF	TRIMLESS	.TR	TRACK	.TK	WALL SURFACE	.WS
BASIT 8012					PAG. 544							
BASIT MOVE 8013					PAG.544							
BASIT MONET 20130					PAG. 546							
BASIT MONET 2 20131					PAG. 546							
BASIT LLORENS 20140					PAG. 548							
BASIT LLORENS SQ 20144					PAG. 548							
BASIT DERIN 8010					PAG. 550							

VISUAL INDEX

KONI	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
KONI 3161			PAG. 552			
KONI SQ 3169			new PAG. 554			
KONI DEEP 3171			new PAG. 556			
KONI TURTA 3156			PAG. 558			

CASTEJON	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	TRACK | .TK	WALL SURFACE | .WS
CASTEJON 20074			PAG. 536			
CASTEJON SQ 20073			PAG. 536			

VISUAL INDEX

LUMINAIRES	PENDANT | .PN	SURFACE | .SR	RECESSED FRAME | .RF	TRIMLESS | .TR	WALL RECESSED | .WR	WALL SURFACE | .WS
HURY 10251						new PAG. 772
GLIM 410004						new PAG. 774
KUU 410014						new PAG. 776
KAPI 9000						PAG. 778
IKI 9011						PAG. 780
OKUMA 8105						PAG. 782
ELENA 8106						PAG. 784
MAGRIT 20127						PAG. 824
KLEE 20128						PAG. 824
KLEE SQ 20129						PAG. 824
ADIMA 8104						PAG. 826
ADIMA SQ 8103						PAG. 826

VISUAL INDEX

NOCTUA	PENDANT | **.PN**	SURFACE | **.SR**	RECESSED FRAME | **.RF**	TRIMLESS | **.TR**	WALL RECESSED | **.WR**	WALL SURFACE | **.WS**
NOCTUA 10103		CRISMOSIL PAG. 384				
NOCTUA SQ 10099		CRISMOSIL PAG. 386				
NOCTUA DEEP 10100		CRISMOSIL PAG. 388				
NOCTUA VENUS 10102		CRISMOSIL PAG. 390				

VITA	PENDANT | **.PN**	SURFACE | **.SR**	RECESSED FRAME | **.RF**	TRIMLESS | **.TR**	WALL RECESSED | **.WR**	WALL SURFACE | **.WS**
VITA 30007				CRISMOSIL new PAG. 688		

VOLCANO	PENDANT | **.PN**	SURFACE | **.SR**	RECESSED FRAME | **.RF**	TRIMLESS | **.TR**	WALL RECESSED | **.WR**	WALL SURFACE | **.WS**
VOLCANO 10062				CRISMOSIL PAG. 690		
VOLCANO DEEP 10063				CRISMOSIL PAG. 692		

VISUAL INDEX

ESPIGA	PENDANT | **.PN**	SURFACE | **.SR**	RECESSED FRAME | **.RF**	TRIMLESS | **.TR**	TRACK | **.TK**	WALL SURFACE | **.WS**
ESPIGA 10086				CRISMOSIL PAG. 694		
ESPIGA SQ 10083				CRISMOSIL PAG. 696		
ESPIGA SIRIO 10077				CRISMOSIL PAG. 698		
ESPIGA SIRIO TWINS 30000				CRISMOSIL PAG. 700		
ESPIGA ORIONIS 10080				CRISMOSIL PAG. 702		
ESPIGA ORIONIS TWINS 30001				CRISMOSIL PAG. 704		

VISUAL INDEX

ZENIT	PENDANT	.PN	SURFACE	.SR	RECESSED FRAME	.RF	TRIMLESS	.TR	WALL RECESSED	.WR	WALL SURFACE	.WS
ZENIT 10123						CRISMOSIL PAG. 707				
ZENIT SQ 30002						CRISMOSIL PAG. 706				
ZENIT DEEP 30004						CRISMOSIL PAG. 708				
ZENIT DEEP TWINS 30005						CRISMOSIL PAG. 709				
ZENIT MOVE 10125						CRISMOSIL PAG. 710				
ZENIT MOVE SQ 30003						CRISMOSIL PAG. 711				
ZENIT ORTO 10126						CRISMOSIL PAG. 712				
ZENIT SIDEREA 10050						CRISMOSIL PAG. 713				
ZENIT ZUBIA 10122						CRISMOSIL PAG. 714				
ZENIT ZUBIA SQ 10121						CRISMOSIL  PAG. 715				

SUNSET	PENDANT	.PN	SURFACE	.SR	RECESSED FRAME	.RF	TRIMLESS	.TR	WALL RECESSED	.WR	WALL SURFACE	.WS
SUNSET 10124							CRISMOSIL PAG. 716				

VISUAL INDEX

VEGA	PENDANT	.PN	SURFACE	.SR	RECESSED FRAME	.RF	TRIMLESS	.TR	WALL RECESSED	.WR	WALL SURFACE	.WS
VEGA ADHARA 10016							CRISMOSIL PAG. 718				
VEGA ADHARA TWINS 10066							CRISMOSIL PAG. 720				
VEGA 10028							CRISMOSIL PAG. 722				
VEGA TWINS 10070							CRISMOSIL PAG. 724				
VEGA ZETA 10001							CRISMOSIL PAG. 726				
VEGA ZETA SQ 10019							CRISMOSIL PAG. 728				
ZETA SQ TWINS 10072							CRISMOSIL PAG. 730				

CENTAURO	PENDANT	.PN	SURFACE	.SR	RECESSED FRAME	.RF	TRIMLESS	.TR	WALL RECESSED	.WR	WALL SURFACE	.WS
CENTAURO 10109							CRISMOSIL PAG. 732				

VISUAL INDEX

WALL	PENDANT	.PN	SURFACE	.SR	RECESSED FRAME	.RF	TRIMLESS	.TR	WALL RECESSED	.WR	WALL SURFACE	.WS
WALL METIS 10098											CRISMOSIL PAG. 810	
WALL ELARA 10097											CRISMOSIL PAG. 812	
WALL TEBE 10096											CRISMOSIL PAG. 814	
WALL LEDA 10051											CRISMOSIL PAG. 816	
WALL ARCE 10055											CRISMOSIL PAG. 818	
WALL CARPO 10059											CRISMOSIL PAG. 820	

FLOOR WASHER	PENDANT	.PN	SURFACE	.SR	RECESSED FRAME	.RF	TRIMLESS	.TR	WALL RECESSED	.WR	WALL SURFACE	.WS
LYRA 10560										CRISMOSIL PAG. 830		
TYRA 10561										CRISMOSIL PAG. 828		
MYRA 10564										CRISMOSIL  PAG. 832		

ORBIT	PENDANT	.PN	SURFACE	.SR	RECESSED FRAME	.RF	TRIMLESS	.TR	WALL RECESSED	.WR	WALL SURFACE	.WS
ORBIT 10091										CRISMOSIL PAG. 834		
ORBIT SQ 10090										CRISMOSIL PAG. 835		
ORBIT NADIR 10113										CRISMOSIL PAG. 836		
ORBIT NADIR SQ 10114										CRISMOSIL PAG. 838		
ORBIT ARA 10006										CRISMOSIL PAG. 840		

DRACO	PENDANT	.PN	SURFACE	.SR	RECESSED FRAME	.RF	TRIMLESS	.TR	WALL RECESSED	.WR	WALL SURFACE	.WS
DRACO 10119										CRISMOSIL PAG. 842		
DRACO TUCANA 10008										CRISMOSIL PAG. 845		
DRACO ZAHARA 10009										CRISMOSIL PAG. 846		
DRACO ORION 10011										CRISMOSIL PAG. 848		

VISUAL INDEX

OUTDOOR	PENDANT | **.PN**	SURFACE | **.SR**	RECESSED FRAME | **.RF**	TRIMLESS | **.TR**	WALL RECESSED | **.WR**	WALL SURFACE | **.WS**
WALL ZEN OUT 11600						PAG. 852
WALL ZEN SQ OUT 11601						PAG. 854
WALL ARA OUT 10006					PAG. 856	
WALL ZAHARA OUT 10009					PAG. 857	
WALL DRACO OUT 10119					PAG. 858	
NOCTUA SQ OUT 10099		PAG. 860				

INDEX

PENDANT & SURFACE | pag 40 to 391

RECESSED WITH FRAME | pag 392 to 577

TRIMLESS | pag 578 to 733

TRACKLIGHT | pag 734 to 769

WALL SURFACE | pag 770 to 821

WALL RECESSED | pag 822 to 849

OUTDOOR | pag 850 to 861

TECHNICAL INFO | pag 862 to 877

USEFUL PAGES

- Round Profile Overview & Accesories pag 52
- Lines Profile Overview pag 148
- Track Accesories pag 768
- Reference Order pag 862
- Finishes pag 864
- Icon Flash pag 865
- Tech Recommendations pag 868
- Sales Conditions pag 874

PENDANT

ALABAMA

ALABAMA SUPER SLIM
310001 PAG. 58

ALABAMA SUPER SLIM TILT
310007 PAG. 62

ALABAMA SLIM
310002 PAG. 66

ALABAMA SLIGHT
10192 PAG. 70

ALABAMA SLIGHT SQ
10194 PAG. 74

ALABAMA
10158 PAG. 78

ALTAIR

ALTAIR
10172 PAG. 82

OHIO

OHIO
10188 PAG. 86

FLORIDA

FLORIDA
10190 PAG. 90

FLORIDA SQ
10191 PAG. 94

ALBERTA

ALBERTA INSIDE
10243 PAG. 98

ALBERTA INSIDE VERTICAL
310008 PAG. 102

ALBERTA INSIDE V-TILT
310009 PAG. 106

ALBERTA DUE
10250 PAG. 110

ALBERTA DUE MOVE
310004 PAG. 114

ALBERTA SOFT
10217 PAG. 118

ALBERTA SLIGHT
10193 PAG. 124

ALBERTA SLIGHT ECCENTRIC
310005 PAG. 128

ALBERTA
10176 PAG. 132

OKKO MODULAR



OKKO MODULAR
10254 PAG. 138

OKKO PLUS MODULAR
10252 PAG. 142

OKKO MODULAR LINE

OKKO MODULAR LINE
210012 PAG. 150

OKKO PLUS MODULAR LINE
210013 PAG. 154

EYE

EYE
210016 PAG. 158

ALARIK

ALARIK MINI
210006 PAG. 164

ALARIK MINI ROUND
210004 PAG. 170

ALARIK SLIM
20224 PAG. 178

ALARIK SLIM ROUND
210019 PAG. 184

ALARIK
10225 PAG. 190

MODULIGHT

MODULIGHT
10210 PAG. 196

OKKIA

OKKIA
210007 PAG. 202

OKKIA PLUS
210017 PAG. 206

VISUAL INDEX

LINGGO

LINGGO MINI
210003 PAG. 210

LINGGO
210002 PAG. 214

BUBBLE



BUBBLE
210010 PAG. 216

ALBA

ALBA MINI
10211 PAG. 226

ALBA
10160 PAG. 230

ALBA NOVUS
210011 PAG. 234

ALBA DOUBLE
10215 PAG. 238

ALBA ASIMETRIC
210009 PAG. 242

ALBA PLUS
10178 PAG. 246

ALBA PLUS ASIMETRIC
210008 PAG. 250

BOLD

BOLD
210001 PAG. 254

BOLD LINE
210015 PAG. 256

TRIBOLD
210018 PAG. 258

WING

WING
10200 PAG. 262

ALZIRA

ALZIRA
10169 PAG. 266

ACOUSTIC

AC. ALZIRA
230002 PAG. 272

AC. ALBA
230004 PAG. 276

AC. LINGGO MINI
230007 PAG. 280

AC. LAMBDA
230001 PAG. 284

AC. ALBA MINI
230008 PAG. 288

AC. ALARIK
230009 PAG. 292

AC. OKKO
230003 PAG. 298



AC. ALBERTA SOFT
230010 PAG. 302

AC. ALABAMA
460001|3 PAG. 306



AC. KLIMT
460002|4 PAG. 310



AC. ACCESORIES
RD|SQ|VT|FL PAG. 314

MARTORELL

MARTORELL
20115 PAG. 322

MARTORELL TUBULAR 40
20192 PAG. 334

MARTORELL TUBULAR 60
20196 PAG. 334

CUBE

CUBE TUBE
9050-9052 PAG. 350

CUBE TUBE MOVE
9051-9053 PAG. 352

ORACLE

ORACLE
20087 PAG. 360

PENDANT

FACE

FACE TUBULAR

20205 PAG. 364

FACE TUBULAR SPAC

20207 PAG. 366

FACE KIERA

20204 PAG. 368

FACE KIERA CEMENT

20208 PAG. 370

FACE IRIS

20203 PAG. 372

SUBLIM

SUBLIM

20206 PAG. 374

GALANTA

GALANTA BONETE

20222 PAG. 376

VENISE

VENISE

410011 PAG. 378

SURFACE

ALABAMA

ALABAMA SUPER SLIM
310001 PAG. 58

ALABAMA SLIM
310002 PAG. 66

ALABAMA SLIGHT
10192 PAG. 70

ALABAMA SLIGHT SQ
10194 PAG. 74

ALABAMA
10158 PAG.78

ALTAIR

ALTAIR
10172 PAG. 82

OHIO

OHIO
10188 PAG. 86

FLORIDA

FLORIDA
10190 PAG. 90

FLORIDA SQ
10191 PAG. 94

ALBERTA

ALBERTA INSIDE
10243 PAG. 98

ALBERTA SOFT
10217 PAG. 118

ALBERTA SLIGHT
10193 PAG. 124

ALBERTA SLIGHT ECCENTRIC
310005 PAG. 128

OKKO MODULAR

OKKO MODULAR
10254 PAG. 138

OKKO PLUS MODULAR
10252 PAG. 142

OKKO PLUS MODULAR

OKKO MODULAR LINE
210012 PAG. 150

OKKO PLUS MODULAR LINE
210013 PAG. 154

EYE

EYE
210016 PAG. 158

ALARIK

ALARIK MINI
210006 PAG. 164

ALARIK SLIM
20224 PAG. 170

ALAARIK SLIM ROUND
210019 PAG. 184

ALARIK
10225 PAG. 190

MODULIGHT

MODULIGHT
10210 PAG. 196

OKKIA

OKKIA
210007 PAG. 202

LINGGO

LINGGO MINI
210003 PAG. 210

LINGGO
210002 PAG. 214

BUBBLE



BUBBLE
210010 PAG. 218

EDGE

EDGE
210014 PAG. 222

VISUAL INDEX

ALBA

ALBA MINI
10211 PAG. 226

ALBA
10160 PAG. 230

ALBA ASIMETRIC
210009 PAG. 242

ALBA PLUS
10178 PAG. 246

ALBA PLUS ASIMETRIC
210008 PAG. 250

BOLD

BOLD
210001 PAG. 254

BOLD LINE
210015 PAG. 256

TRIBOLD
210018 PAG. 258

WING

WING
10200 PAG. 262

ACOUSTIC



AC. ALBA
230004 PAG. 276

AC. LAMBDA
230001 PAG. 284



ACOUSTIC ACCESORIES
RD|SQ|VT|FL PAG. 314

MARTORELL

MARTORELL
20115 PAG. 322

MARTORELL MOVE
20110 PAG. 324

MARTORELL TUBE MOVE
20138 PAG. 326

MARTORELL SQ
20132 PAG. 328

MARTORELL SQ2
20133 PAG. 328

MARTORELL TUBULAR 40
20192 PAG. 330

MARTORELL TUBULAR 60
20196 PAG. 330

MARTORELL TUBULAR TILT
20195 PAG. 332

MARTORELL MINI CRATE
20175 PAG. 334

MARTORELL CRATE
20176 PAG. 336

KLIMT

KLIMT
20134 PAG. 338

KLIMT FIX
20135 PAG. 340

GEO

GEO
30511 PAG. 342

LUK

LUK FREIR
20018 PAG. 344

LUK FREIR 2
20019 PAG. 344

LUK CRUSADER
20082 PAG. 346

LUK HAWKEYE
20083 PAG. 348

LUK HAWKEYE 2
20084 PAG. 348

CUBE

CUBE TUBE
9050-9052 PAG. 350

CUBE TUBE MOVE
9051-9053 PAG. 352

CUBE
8201 PAG. 354

CUBE SQ2
8202 PAG. 354

CUBE SQ3
3012 PAG. 354

ORACLE

ORACLE
20087 PAG. 360

FACE

FACE TUBULAR
20205 PAG. 362

SURFACE

CATLI

CATLI

3010 PAG. 358

CATLI SQ

3011 PAG. 358

NOCTUA

CRISMOSIL

NOCTUA

10103 PAG. 384

CRISMOSIL new

NOCTUA SQ

10099 PAG. 386

CRISMOSIL

NOCTUA DEEP

10100 PAG. 388

CRISMOSIL

NOCTUA VENUS

10102 PAG. 390

A bright idea for any room

The ultimate aim: to focus, not distract. Hence the simplicity of our Alabama, Altair, Alberta, Ohio and Florida luminaires. Square or round, whose minimalism conceals an enormous potential to create unique environments.

All these luminaries feature extruded aluminium profiles and opal or microprismatic diffusers to provide even light. The result is enveloping, optimal background lighting with scope to play with the intensity of light.

Ambientes con luz propia

La finalidad última: convertir el espacio iluminado en protagonista. De ahí la simplicidad de los modelos que conforman las familias Alabama, Altair, Alberta, Ohio y Florida. Cuadrados o redondos, con relativa sencillez en sus acabados pero con un enorme potencial de crear atmósferas únicas.

Los modelos Alabama se presentan en perfilería de aluminio extruido y difusores opales o microprismáticos para garantizar una iluminación uniforme y homogénea. Se consigue por ello un ambiente general de iluminación óptima, envolvente, que nos permite jugar con la intensidad de la luz.

LARGE LUMINAIRES
LUMINARIAS DE GRAN FORMATO

PENDANT | SURFACE

PROFILE

ALBERTA
REF. 10176

ALBERTA SLIGHT
REF. 10193

ALBERTA SLIGHT ECCENTRIC
REF. 310005

ALBERTA SOFT
REF. 10217

ALBERTA INSIDE | VERTICAL | VTILT
REF. 10243 | 310008 | 310009

ALBERTA DUE | MOVE
REF. 10250 | 310004

OKKO MODULAR
REF. 10254

OKKO PLUS MODULAR
REF. 10252

OVERVIEW

PENDANT | SURFACE

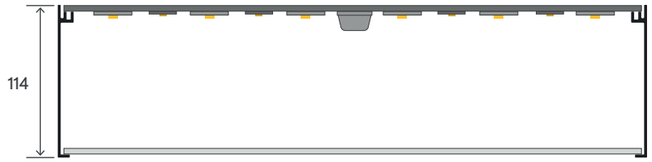

ALABAMA
REF. 10158

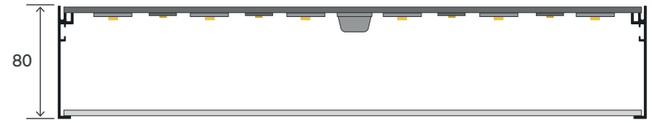

ALABAMA SLIGHT | SQ
REF. 10192 | 10194

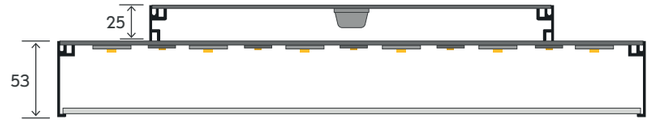

ALABAMA SLIM
REF. 310002



ALABAMA SUPER SLIM | TILT
REF. 310001 | 310007

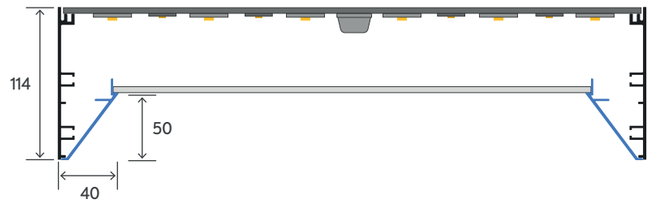

FLORIDA | SQ
REF. 10190 | 10191

ALTAIR
REF. 10172

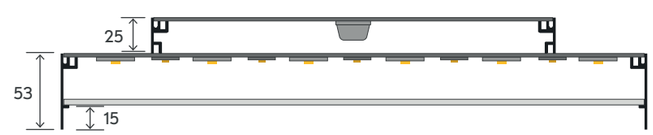

OHIO
REF. 10188

CONNECTION BOXES





CB03.XX





CB10.XX





CB02.XX





CB07.XX





CB13.XX





CB05.XX

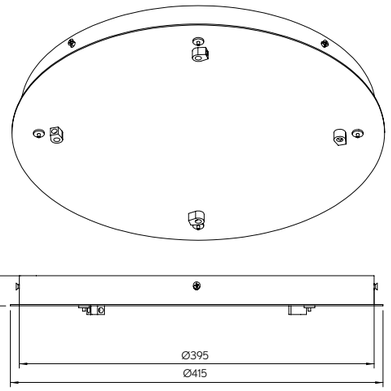

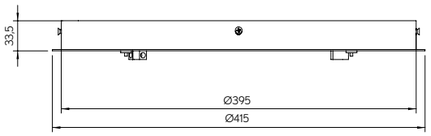

CB12.XX

CONNECTION & DRIVER BOXES



CB09.12.XX



CB06.32.XX



CB08.30



CB09.32.XX

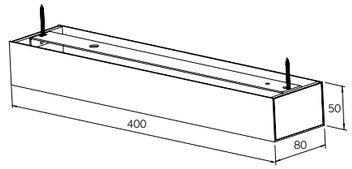

CB06.40.XX



CB09.40.XX

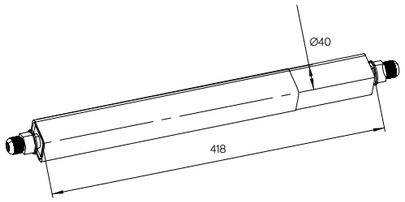

CB04.OP



CB08.38

.PN

Select finishes

ACCESORIES

PENDANT

SUSPENSION ACCESORIES

SUSPENSION KIT

- **SC05.XX** - 5 m.
- **SC07.XX** - 7 m.
- **SC10.XX** - 10m.



CENTRAL ROD SUSPENSION + CONNECTION BOX

- **SC20.60.XX** - 600mm
- **SC20.80.XX** - 800mm
- **SC20.100.XX** - 1000mm



- **SC21.60.XX** - 600mm
- **SC21.80.XX** - 800mm
- **SC21.100.XX** - 1000mm



CABLE CONCENTRATOR KIT + CONNECTION BOX

- **SC21.XX** - .25 | .35
- **SC22.XX** - .45 | .65
- **SC23.XX** - 95 | .125

INDIVIDUAL CEILING RECESSED ACCESORIES



CB20.RF.XX





CB21.RF.XX





CB22.RF.XX

* Check luminaire's compatibility. *Consultar compatibilidad con la luminaria.*

ALABAMA SUPER SLIM

new

A bright idea for any room

The ultimate aim: to focus, not distract. Hence the simplicity of the Alabama family. Square or round, whose minimalism conceals an enormous potential to create unique environments.

Alabama luminaries feature extruded aluminium profiles and opal or microprismatic diffusers to provide even light. The result is enveloping, optimal background lighting with scope to play with the intensity of light.

Ambientes con luz propia

La finalidad última: convertir el espacio iluminado en protagonista. De ahí la simplicidad de los modelos que conforman la familia Alabama. Cuadrados o redondos, con relativa sencillez en sus acabados pero con un enorme potencial de crear atmósferas únicas.

Los modelos Alabama se presentan en perfilería de aluminio extruido y difusores opales o micro prismáticos para garantizar una iluminación uniforme y homogénea. Se consigue por ello un ambiente general de iluminación óptima, envolvente, que nos permite jugar con la intensidad de la luz.

new

FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 63mm.

250 | 350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
3 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm² (Ø350 / Ø450 - 2 x Feed Hose 3 x 0,75mm²)
DIM DOWN: 1 x Feed Hose 5 x 0,75mm² (Ø250 - 1 x Feed Hose 3 x 0,75mm²)
DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm² (Ø350 / Ø450 - 1 x Feed Hose 3 x 0,75mm²)
Connection box CB03 with luminaire's finish
.SR
Surface mounting kit

ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS

ALABAMA
SUPER SLIM

REF 310001.PN | 310001.SR

.PN
PENDANT

·310001 ALABAMA SUPER SLIM
| PN Pag. 58

.SR
SURFACE

·310001 ALABAMA SUPER SLIM
| SR Pag. 58



ALABAMA SUPER SLIM	REF.	DIMEN-SION ⬟	FINISH	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT LUMEN	DOWNLIGHT WATT	DOWNLIGHT mA	UPLIGHT ▲.UP *1 LUMEN	UPLIGHT ▲.UP *1 WATT	DIMM ▼	SKETCH
	310001	**.25** *2	●	**.OP .MP**	**.ST**	**.9**	**.27**	1385	13	250	310	5	**.DA .PU .D1**	63 Ø250
							.30	1400			321			
							.40	1425			408			
	310001	**.35**	●	**.OP .MP**	**.ST**	**.9**	**.27**	2350	19	250	458	7	**.DA .PU .D1**	63 Ø350
							.30	2392			474			
							.40	2697			603			
	310001	**.45**	●	**.OP .MP**	**.ST**	**.9**	**.27**	4700	37	250	605	10	**.DA .PU .D1**	63 Ø450
							.30	4784			627			
							.40	5394			797			
	310001	**.65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	10572	82	250	901	13	**.DA .PU .D1**	63 Ø650
							.30	10704			933			
							.40	12484			1186			
	310001	**.95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	21598	168	250	1344	20	**.DA .PU .D1**	63 Ø950
							.30	21976			1392			
							.40	25816			1770			
	310001	**.125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	36308	282	250	1787	27	**.DA .PU .D1**	63 Ø1250
							.30	36848			1851			
							.40	43124			2353			

Reference order | 310001.XX | .SR .PN | .XX.XX.ST.9.XX.XX.XX

*1 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*
*2 Remote Driver. *Driver en remoto.*

OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FOR MODEL	FINISH
	40 Ø102	**CB10**	.25 .35	●
	26 Ø150	**CB02**	.45 .65	
	 47 Ø310	**CB05**	.95 .125	

Reference order | CBXX.XX

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
	 Ø85 + CB10	**SC21**	.25 .35	●
	 Ø125 + CB02	**SC22**	.45 .65	
	 Ø215 + CB05	**SC23**	.95 .125	

Reference order | SCXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	**SC05**	**5M.**	**.SA**
	SC07	**7M.**	
	SC10	**10M.**	

Reference order | SCXX.SA

CENTRAL ROD SUSPENSION*	CONNECTION BOX	REF.	DIMENSIONS ⬟	FINISH
	 40 Ø102	**SC20**	**.60** 600mm	●
			.80 800mm	
			.100 1000mm	

Luminaire .95 and .125 require 3 rod suspensions.
Luminarias .95 y .125 requieren 3 tijas.

Reference order | SC20.XX.XX

.SR
.PN
PENDANT | SURFACE

● Select finishes



ALABAMA
SUPER SLIM

REF 310001.PN | 310001.SR

SUSPENSION OPTIONS (.PN)

DEFAULT | CABLE CONCENTRATOR | CABLE CONCENTRATOR KIT | CENTRAL ROD SUSPENSION

PHOTOMETRY



OPAL | MICROPRISMATIC

INCLUDED (.PN)



CB03
CONNECTION BOX

SC03.SA
WIRE 3M.

PROFILE



FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 63 mm.

350 | 450

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Movable component for fastening to the ceiling.
Central Rod Suspension + Connection Box (SC20.60) with luminaire's finish

new

ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

.PN

PENDANT

INSTALLATIONS

ALABAMA
SUPER SLIM TILT

REF310007 .PN

.PN
PENDANT

·310007 ALABAMA SUPER SLIM TILT
| PN - Pag. 62



ALABAMA SUPER SLIM TILT	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP. ▼	SKETCH
	310007	.35	●	.OP .MP	.ST	.9	.27	2350	26	250	.DA .PU .D1	
							.30	2392				
							.40	2697				
	310007	.45	●	.OP .MP	.ST	.9	.27	4700	40	250	.DA .PU .D1	
							.30	4784				
							.40	5394				

Reference order | 310007.XX .PN.XX.XX.ST.9.XX.XX

SUSPENSION ROD	REF.	DIMENSIONS ⬟	FINISH
	SC20	.80 800mm	●
		.100 1000mm	

Reference order | SC20.XX.XX

● Select finishes

ALABAMA
SUPER SLIM TILT

REF 310007.PN

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED



SUSPENSION ROD SC20.60

PROFILE



new

FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 78 mm.

250 | 350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
3 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm² (Ø350 / Ø450 - 2 x Feed Hose 3 x 0,75mm²)
DIM DOWN: 1 x Feed Hose 5 x 0,75mm² (Ø250 - 1 x Feed Hose 3 x 0,75mm²)
DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm² (Ø350 / Ø450 - 1 x Feed Hose 3 x 0,75mm²)
Connection box CB03 with luminaire's finish
.SR
Surface mounting kit

ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

.SR
.PN
PENDANT | SURFACE

ALABAMA SLIM

REF 310002.PN | 310002.SR

INSTALLATIONS

.PN
PENDANT

·310002 ALABAMA SLIM | PN
Pag.66

.SR
SURFACE

·310002 ALABAMA SLIM | SR
Pag. 66



ALABAMA SLIM	REF.	DIMEN-SION ⬟	FINISH	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT LUMEN	DOWNLIGHT WATT	DOWNLIGHT mA	UPLIGHT ▲.UP *1 LUMEN	UPLIGHT ▲.UP *1 WATT	DIMM ▼	SKETCH
	310002	**.25** *2	●	**.OP .MP**	**.ST**	**.9**	**.27**	1385	13	250	310	5	**.DA .PU .D1**	78 Ø250
							.30	1400			321			
							.40	1425			408			
	310002	**.35**	●	**.OP .MP**	**.ST**	**.9**	**.27**	2350	19	250	458	7	**.DA .PU .D1**	78 Ø350
							.30	2392			474			
							.40	2697			603			
	310002	**.45**	●	**.OP .MP**	**.ST**	**.9**	**.27**	4700	37	250	605	9	**.DA .PU .D1**	78 Ø450
							.30	4784			627			
							.40	5394			797			
	310002	**.65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	10572	82	250	901	13	**.DA .PU .D1**	78 Ø650
							.30	10704			933			
							.40	12484			1186			
	310002	**.95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	21598	168	250	1344	20	**.DA .PU .D1**	78 Ø950
							.30	21976			1392			
							.40	25816			1770			
	310002	**.125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	36308	282	250	1787	27	**.DA .PU .D1**	78 Ø1250
							.30	36848			1851			
							.40	43124			2353			

Reference order | 310002.XX | .SR .PN | .XX.XX.ST.9.XX.XX.XX

*1 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*
*2 Remote Driver. *Driver en remoto.*
*3 Remote Driver for uplight. *Driver en remoto para luz indirecta.*

OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FOR MODEL	FINISH
	40 Ø102	**CB10**	.25 .35	●
	26 Ø150	**CB02**	.45 .65	
	 47 Ø310	**CB05**	.95 .125	

Reference order | CBXX.XX

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
	 Ø85 + CB10	**SC21**	.25 .35	●
	 Ø125 + CB02	**SC22**	.45 .65	
	 Ø215 + CB05	**SC23**	.95 .125	

Reference order | SCXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	**SC05**	**5M.**	**.SA**
	SC07	**7M.**	
	SC10	**10M.**	

Reference order | SCXX.SA

CENTRAL ROD SUSPENSION*	CONNECTION BOX	REF.	DIMENSIONS ⬟	FINISH
	 40 Ø102	**SC20**	**.60** 600mm	●
			.80 800mm	
			.100 1000mm	

Luminaire .95 and .125 require 3 rod suspensions.
Luminarias .95 y .125 requieren 3 tijas.

Reference order | SC20.XX.XX

● Select finishes



ALABAMA SLIM

REF 310002.PN | 310002.SR

SUSPENSION OPTIONS (.PN)

DEFAULT | CABLE CONCENTRATOR | CABLE CONCENTRATOR KIT | CENTRAL ROD SUSPENSION

PHOTOMETRY



OPAL | MICROPRISMATIC

INCLUDED (.PN)



CB03 CONNECTION BOX

SC03.SA WIRE 3M.

PROFILE



FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 80 mm.

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
3 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): Cabling 1 circuit, 1 x Feed Hose 5 x 0,75mm²
Connection box CB03 with luminaire's finish
.SR
Surface mounting kit

ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

INSTALLATIONS



ALABAMA
SLIGHT

REF 10192.PN | 10192.SR

.PN
PENDANT

·10192 ALABAMA SLIGHT | PN
Pag. 70

.SR
SURFACE

·10192 ALABAMA | SR
Pag. 70



ALABAMA SLIGHT	REF.	DIMEN-SION ⬟	FINISH	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT LUMEN	DOWNLIGHT WATT	DOWNLIGHT mA	UPLIGHT ▲.UP *1 LUMEN	UPLIGHT ▲.UP *1 WATT	DIMM ▼	SKETCH
	10192	**.35**	●	**.OP .MP**	.ST	.9	**.27**	2706	27	700	458	7	**.DA .PU .D1**	80 Ø350
							.30	2940			474			
							.40	3000			603			
	10192	**.45**	●	**.OP .MP**	.ST	.9	**.27**	4510	45	700	605	9	**.DA .PU .D1**	80 Ø450
							.30	4900			627			
							.40	5000			797			
	10192	**.65**	●	**.OP .MP**	.ST	.9	**.27**	10824	109	700	901	13	**.DA .PU .D1**	80 Ø650
							.30	11760			933			
							.40	12000			1186			
	10192	**.95**	●	**.OP .MP**	.ST	.9	**.27**	19844	200	700	1344	20	**.DA .PU .D1**	80 Ø950
							.30	21560			1392			
							.40	22000			1770			
	10192	**.125**	●	**.OP .MP**	.ST	.9	**.27**	31570	318	700	1787	27	**.DA .PU .D1**	80 Ø1250
							.30	34300			1851			
							.40	35000			2353			

Reference order | 10192.XX | .SR .PN | .XX.XX.ST.9.XX.XX.XX

*1 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*

OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FOR MODEL	FINISH
	40 Ø102	**CB10**	.35	●
	26 Ø150	**CB02**	.45 .65	
	 47 Ø310	**CB05**	.95 .125	

Reference order | CBXX.XX ●

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
	 Ø85 + CB10	**SC21**	.35	●
	 Ø125 + CB02	**SC22**	.45 .65	
	Ø215 + CB05	**SC23**	.95 .125	

Reference order | SCXX.XX ●

SUSPENSION KIT	REF.	DIMENSION	FINISH
	**SC05**	**5M.**	**.SA**
	SC07	**7M.**	
	SC10	**10M.**	

Reference order | SCXX.SA

CENTRAL ROD SUSPENSION*	CONNECTION BOX	REF.	DIMENSIONS ⬟	FINISH
	 + 40 Ø102	**SC20**	**.60** 600mm	
			.80 800mm	●
			.100 1000mm	

Luminaire .95 and .125 require 3 rod suspensions.
Luminarias .95 y .125 requieren 3 tijas.

Reference order | SC20.XX.XX ● ●

SUSPENSION OPTIONS (.PN)

DEFAULT

CABLE CONCENTRATOR

CABLE CONCENTRATOR KIT

CENTRAL ROD SUSPENSION

● Select finishes

.WH-WH .BK-BK .GC-GC .BM-BM .BS-BS .BC-BC .CR-CR .CB-CB .GY-GY .MG-MG .VC-VC .YM-YM

PHOTOMETRY


OPAL MICROPRISMATIC

INCLUDED (.PN)


40 Ø102
CB03 CONNECTION BOX

SC03.SA WIRE 3M.

PROFILE


80
10

ALABAMA SLIGHT

REF 10192.PN | 10192.SR

FINISHES

● COLORS

DIMENSIONS

⬟ SIZES mm. | HEIGHT 80 mm.

350x350 | 450x450 | 650x650 | 950x950 | 1250x1250

300 x 650 | 300 x 950 | 300 x 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
4 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
Connection box CB09.12 with luminaire's finish
.SR
Surface mounting kit

ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS

ALABAMA
SLIGHT SQ

REF 10194.PN | 10194.SR

.PN
PENDANT

·10194 ALABAMA SLIGHT SQ | PN
Pag. 74

.SR
SURFACE

·10194 ALABAMA SLIGHT SQ | SR
Pag. 74

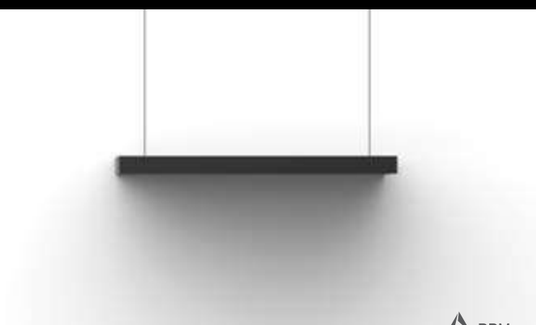

ALABAMA SLIGHT SQ	REF.	DIMEN-SION ⬟	FINISH	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT LUMEN	DOWNLIGHT WATT	DOWNLIGHT mA	UPLIGHT ▲.UP *1 LUMEN	UPLIGHT ▲.UP *1 WATT	DIMM ▼	SKETCH
	10194	**.35**	●	**.OP .MP**	**.ST**	**.9**	**.27**	2706	27	700	470	7	**.DA .PU .D1**	
							.30	2940			487			
							.40	3000			619			
	10194	**.45**	●	**.OP .MP**	**.ST**	**.9**	**.27**	5412	55	700	658	10	**.DA .PU .D1**	
							.30	5880			682			
							.40	6000			867			
	10194	**.65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	10824	109	700	1034	15	**.DA .PU .D1**	
							.30	11760			1071			
							.40	12000			1362			
	10194	**.95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	21648	218	700	1598	24	**.DA .PU .D1**	
							.30	23520			1656			
							.40	24000			2105			
	10194	**.125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	36080	364	700	2162	32	**.DA .PU .D1**	
							.30	39200			2240			
							.40	40000			2847			

Reference order | 10194.XX | .SR .PN | .XX.XX.ST9.XX.XX.XX

*1 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*

ALABAMA SLIGHT SQ	REF.	DIMEN-SION ⬟	FINISH	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT LUMEN	DOWNLIGHT WATT	DOWNLIGHT mA	UPLIGHT ▲.UP* LUMEN	UPLIGHT ▲.UP* WATT	DIMM ▼	SKETCH
	10194	**.30-65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	3608	36	700	705	11	**.DA .PU .D1**	
							.30	3920			731			
							.40	4000			929			
	10194	**.30-95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	5412	55	700	987	15	**.DA .PU .D1**	
							.30	5880			1023			
							.40	6000			1300			
	10194	**.30-125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	7216	73	700	1269	19	**.DA .PU .D1**	
							.30	7840			1315			
							.40	8000			1671			

Reference order | 10194.XX.PN.XX.XX.XX.X.XX.XX.XX

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	**SC05**	**5M.**	**.SA**
	SC07	**7M.**	
	SC10	**10M.**	

Reference order | SCXX.SA

CENTRAL ROD SUSPENSION	CONNECTION BOX	REF.	DIMEN-SIONS ⬟	FINISH
		**SC21**	**.60** 600mm	●
			.80 800mm	
			.100 1000mm	

Luminaire .95 and .125 require 2 rod suspensions.
Luminarias .95 y .125 requieren 2 tijas.

Reference order | SC21.XX.XX

*1 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*

PENDANT | SURFACE

.SR .PN

● Select finishes



ALABAMA SLIGHT SQ

REF 10194.PN | 10194.SR

SUSPENSION OPTIONS (.PN)

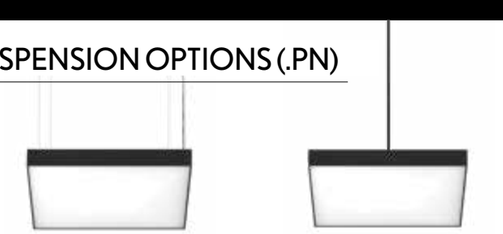

DEFAULT

CENTRAL ROD SUSPENSION

PHOTOMETRY



OPAL

MICROPRISMATIC

INCLUDED (.PN)



CB09.12
CONNECTION BOX

SC03.SA
WIRE 3M.

PROFILE



FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 114 mm.

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
3 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
Connection box CB03 with luminaire's finish
.SR
Surface mounting kit

ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
CRI 80
Motion Detection
RGB
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

ALABAMA

REF 10158.PN | 10158.SR

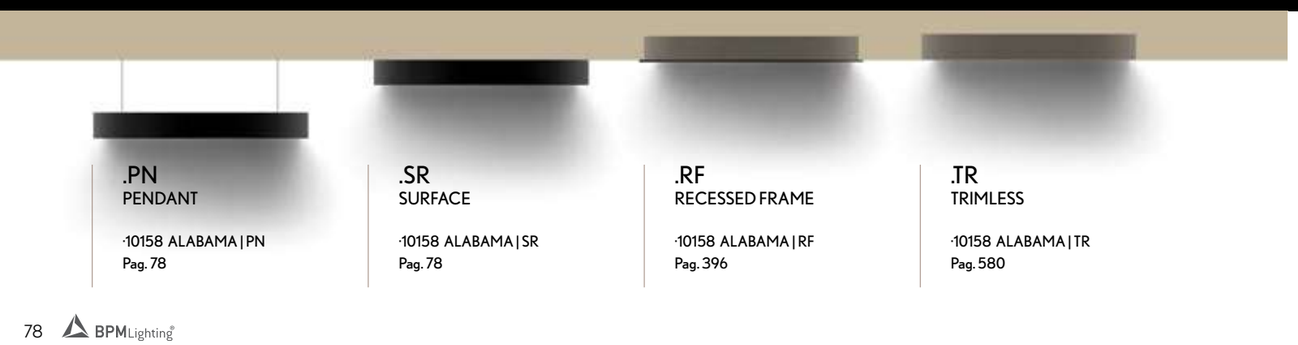

.PN
PENDANT

·10158 ALABAMA | PN
Pag. 78

.SR
SURFACE

·10158 ALABAMA | SR
Pag. 78

.RF
RECESSED FRAME

·10158 ALABAMA | RF
Pag. 396

.TR
TRIMLESS

·10158 ALABAMA | TR
Pag. 580



ALABAMA	REF.	DIMEN-SION ⬟	FIN-ISH	DIFFUS-ER ■	POW-ER	CRI	K	DOWNLIGHT LUMEN	DOWNLIGHT WATT	DOWNLIGHT mA	UPLIGHT ▲.UP *2 LUMEN	UPLIGHT ▲.UP *2 WATT	DIMM ▼	SKETCH
	10158	.35	●	.OP .MP	.ST	.9	.27	-	18	500	-	7	.DA .PU .D1	114 Ø350
							.30	2385			474			
							.40	2475			603			
						.8	TW *1	-	-	-	-	-	-	
					.HI	.9	.27	-	35	500	-	15	.DA .PU .D1	
							.30	4767			1016			
							.40	4956			1291			
	10158	.45	●	.OP .MP	.ST	.9	.27	4590	35	500	605	9	.DA .PU .D1	114 Ø450
							.30	4770			627			
							.40	4950			797			
						.8	TW *1	11400 - 11820	76	700	-	-	.DA	
					.HI	.9	.27	9180	71	500	1298	19	.DA .PU .D1	
							.30	9534			1343			
							.40	9912			1708			
	10158	.65	●	.OP .MP	.ST	.9	.27	9180	71	500	901	13	.DA .PU .D1	114 Ø650
							.30	9540			933			
							.40	9900			1186			
						.8	TW *1	22800-23640	152	700	-	-	.DA	
					.HI	.9	.27	18360	142	500	1932	29	.DA .PU .D1	
							.30	19068			1999			
							.40	19824			2541			
	10158	.95	●	.OP .MP	.ST	.9	.27	16830	130	500	1344	20	.DA .PU .D1	114 Ø950
							.30	17490			1392			
							.40	18150			1770			
						.8	TW *1	41800-43340	279	700	-	-	.DA	
					.HI	.9	.27	33660	260	500	2882	43	.DA .PU .D1	
							.30	34958			2982			
							.40	36344			3791			
	10158	.125	●	.OP .MP	.ST	.9	.27	27540	212	500	1787	27	.DA .PU .D1	114 Ø1250
							.30	28620			1851			
							.40	29700			2353			
						.8	TW *1	68400-70920	457	700	-	-	.DA	
					.HI	.9	.27	55080	425	500	3832	57	.DA .PU .D1	
							.30	57204			3965			
							.40	59472			5041			

Reference order | 10158.XX | .SR .PN | .XX.XX.XX.X.XX.XX.XX

● Select finishes

.WH-WH .BK-BK .GC-GC .BM-BM .BS-BS .BC-BC .CR-CR .CB-CB .GY-GY .MG-MG .VC-VC .YM-YM

*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700mA.*

*2 Upright (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*

OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FOR MODEL	FINISH
	40 Ø102	CB10	.35	●
	26 Ø150	CB02	.45 .65	
	 47 Ø310	CB05	.95 .125	

Reference order | CBXX.XX

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
	 Ø85 + CB10	SC21	.35	●
	 Ø125 + CB02	SC22	.45 .65	
	Ø215 + CB05	SC23	.95 .125	

Reference order | SCXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

CENTRAL ROD SUSPENSION*	CONNECTION BOX	REF.	DIMENSIONS ⬟	FINISH
	 40 Ø102	SC20	.60 600mm	●
			.80 800mm	
			.100 1000mm	

Luminaire .95 and .125 require 3 rod suspensions.
Luminarias .95 y .125 requieren 3 tijas.

Reference order | SC20.XX.XX

.SR .PN

PENDANT | SURFACE

ALABAMA

REF 10158.PN | 10158.SR

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED (.PN)

CB03
CONNECTION BOX

SC03.SA
WIRE 3M.

PROFILE

FINISHES

● COLORS

DIMENSIONS

⬟ SIZES mm. | HEIGHT 114 mm.

400x400 | 600x600 | 900x900 | 1200x1200

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
4 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
Connection box CB09.12 with luminaire's finish
.SR
Surface mounting kit

ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
CRI 80
Motion Detection
RGB
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

INSTALLATIONS



ALTAIR

REF 10172.PN | 10172.SR

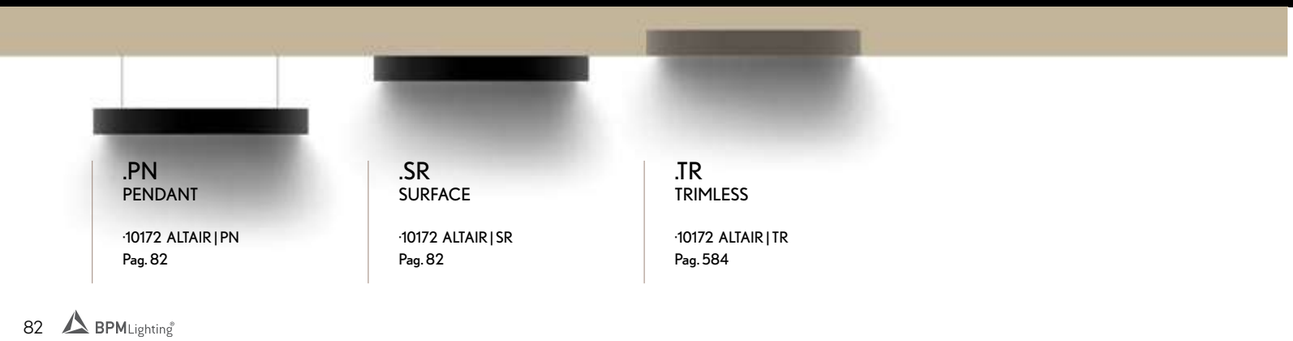

.PN
PENDANT
·10172 ALTAIR | PN
Pag. 82

.SR
SURFACE
·10172 ALTAIR | SR
Pag. 82

.TR
TRIMLESS
·10172 ALTAIR | TR
Pag. 584



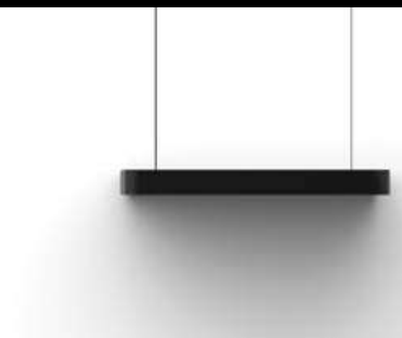

ALTAIR	REF.	DIMEN-SIONS ⬟	FINISH	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT LUMEN	DOWNLIGHT WATT	DOWNLIGHT mA	UPLIGHT ▲.UP *2 LUMEN	UPLIGHT ▲.UP *2 WATT	DIMM ▼	SKETCH
	10172	.45	●	.OP .MP	.ST	.9	.27	3060	24	500	564	8	.DA .PU .D1	
							.30	3180			584			
							.40	3300			743			
						.8	.TW *1	7600 - 7880	51	700	-	-	.DA	
					.HI	.9	.27	6120	47	500	1210	18	.DA .PU .D1	
							.30	6356			1252			
							.40	6608			1591			
	10172	.65	●	.OP .MP	.ST	.9	.27	6120	47	500	940	14	.DA .PU .D1	
							.30	6360			974			
							.40	6600			1238			
						.8	.TW *1	15200 - 15760	102	700	-	-	.DA	
					.HI	.9	.27	12240	94	500	2016	30	.DA .PU .D1	
							.30	12712			2086			
							.40	13216			2652			
	10172	.95	●	.OP .MP	.ST	.9	.27	11475	89	500	1504	22	.DA .PU .D1	
							.30	11925			1558			
							.40	12375			1981			
						.8	.TW *1	28500 - 29550	191	700	-	-	.DA	
					.HI	.9	.27	22950	177	500	3226	48	.DA .PU .D1	
							.30	23835			3338			
							.40	24780			4243			
	10172	.125	●	.OP .MP	.ST	.9	.27	18360	142	500	2068	31	.DA .PU .D1	
							.30	19080			2143			
							.40	19800			2724			
						.8	.TW *1	45600 - 47280	305	700	-	-	.DA	
					.HI	.9	.27	36720	283	500	4435	66	.DA .PU .D1	
							.30	38136			4589			
							.40	39648			5834			

Reference order | ⬟ 10172.XX | .SR .PN | ● ■ .XX.XX.XX.X.XX | ▼ ▲ .XX.XX

.SR

.PN

PENDANT | SURFACE

- Select finishes



ALTAIR

REF 10172.PN | 10172.SR

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED (.PN)



CB09.12
CONNECTION BOX

SC03.SA
WIRE 3M.

PROFILE

*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700mA.*

*2 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*

FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 78 mm.

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
3 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm² (Ø350 / Ø450 - 2 x Feed Hose 3 x 0,75mm²)
DIM DOWN: 1 x Feed Hose 5 x 0,75mm² (Ø250 - 1 x Feed Hose 3 x 0,75mm²)
DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm² (Ø350 / Ø450 - 1 x Feed Hose 3 x 0,75mm²)
Connection box CB03 with luminaire's finish
.SR
Surface mounting kit

ON DEMAND

Special Color Temperature
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

new

.SR

.PN

PENDANT | SURFACE

OHIO

REF 10188.PN | 10188.SR

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06 | IP40 | LIFE 50000H | DIM OPTIONAL | INTEGRATED | INDOOR | 220-240 V 50-60 Hz | CE

INSTALLATIONS

.PN
PENDANT
·10188 OHIO | PN
Pag. 86

.SR
SURFACE
·10188 OHIO | SR
Pag. 86

.RF
RECESSED FRAME
·10188 OHIO | RF
Pag. 400

.TR
TRIMLESS
·10188 OHIO | TR
Pag. 588



OHIO	REF.	DIMEN-SION ⬟	FINISH	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT LUMEN	DOWNLIGHT WATT	DOWNLIGHT mA	UPLIGHT ▲UP *1*2 LUMEN	UPLIGHT ▲UP *1*2 WATT	DIMM ▼	SKETCH
	10188	**.35**	●	**.OP .MP**	**.ST**	**.9**	**.27**	2416	19	250	458	7	**.DA .PU .D1**	78 Ø350
							.30	2392			474			
							.40	2697			603			
	10188	**.45**	●	**.OP .MP**	**.ST**	**.9**	**.27**	4832	37	250	605	10	**.DA .PU .D1**	78 Ø450
							.30	4784			627			
							.40	5394			797			
	10188	**.65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	10572	82	250	901	13	**.DA .PU .D1**	78 Ø650
							.30	10704			933			
							.40	12484			1186			
	10188	**.95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	21598	153	250	1344	20	**.DA .PU .D1**	78 Ø950
							.30	21976			1392			
							.40	25816			1770			
	10188	**.125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	36308	252	250	1787	27	**.DA .PU .D1**	78 Ø1250
							.30	36848			1851			
							.40	43124			2353			

Reference order | 10188.XX | .SR .PN | .XX.XX.ST9.XX.XX.XX

*1 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*
*2 Remote Driver for uplight. *Driver en remoto para luz indirecta.*

OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FOR MODEL	FINISH
	40 Ø102	**CB10**	.25 .35	●
	26 Ø150	**CB02**	.45 .65	
	 47 Ø310	**CB05**	.95 .125	

Reference order | CBXX.XX

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
	 Ø85 + CB10	**SC21**	.25 .35	●
	 Ø125 + CB02	**SC22**	.45 .65	
	 Ø215 + CB05	**SC23**	.95 .125	

Reference order | SCXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	**SC05**	**5M.**	**.SA**
	SC07	**7M.**	
	SC10	**10M.**	

Reference order | SCXX.SA

CENTRAL ROD SUSPENSION*	CONNECTION BOX	REF.	DIMENSIONS ⬟	FINISH
	 40 Ø102	**SC20**	**.60** 600mm	●
			.80 800mm	
			.100 1000mm	

Luminaire .95 and .125 require 3 rod suspensions.
Luminarias .95 y .125 requieren 3 tijas.

Reference order | SC20.XX.XX

● Select finishes



OHIO

REF 10188.PN | 10188.SR

SUSPENSION OPTIONS (.PN)

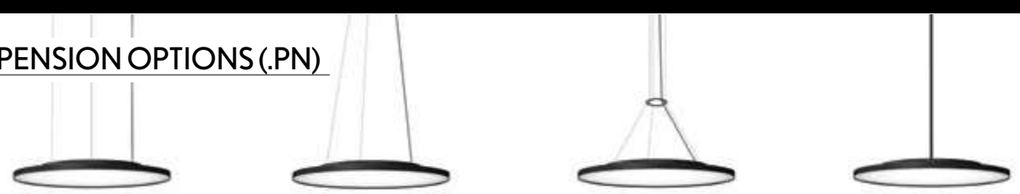

DEFAULT | CABLE CONCENTRATOR | CABLE CONCENTRATOR KIT | CENTRAL ROD SUSPENSION

PHOTOMETRY



OPAL | MICROPRISMATIC

INCLUDED (.PN)



CB03 CONNECTION BOX | SC03.SA WIRE 3M.

PROFILE



FINISHES

● EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 114 mm.

450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
3 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
Connection box CB03 with luminaire's finish
.SR
Surface mounting kit

ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS

FLORIDA

REF 10190.PN | 10190.SR

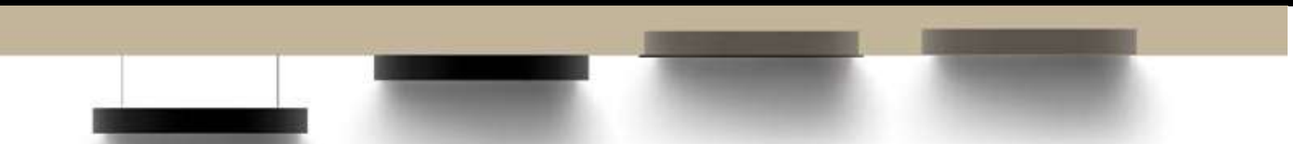

.PN
PENDANT

·10190 FLORIDA | PN
Pag. 90

.SR
SURFACE

·10190 FLORIDA | SR
Pag. 90

.RF
RECESSED FRAME

·10190 FLORIDA | RF
Pag. 408

.TR
TRIMLESS

·10190 FLORIDA | TR
Pag. 596

FLORIDA	REF.	DIMEN-SION ⬟	FINISH	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲.UP *1		DIMM ▼	SKETCH
								LUMEN	WATT	MA	LUMEN	WATT		
	10190	**.45**	●	**.OP .MP**	**.ST**	**.9**	**.27**	4510	45	700	605	9	**.DA .PU .D1**	 114 Ø450
							.30	4900			627			
							.40	5000			797			
	10190	**.65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	10824	109	700	901	13	**.DA .PU .D1**	114 Ø650
							.30	11760			933			
							.40	12000			1186			
	10190	**.95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	19844	202	700	1344	20	**.DA .PU .D1**	114 Ø950
							.30	21560			1392			
							.40	22000			1770			
	10190	**.125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	31570	318	700	1787	27	**.DA .PU .D1**	 114 Ø1250
							.30	34300			1851			
							.40	35000			2353			

Reference order | 10190.XX ⬟ | .SR .PN | .XX.XX ● ■ .ST.9.XX ▼ .XX.XX ▲

*1 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*

- Select finishes

FLORIDA

REF 10190.PN | 10190.SR

SUSPENSION OPTIONS (.PN)

DEFAULT | CABLE CONCENTRATOR | CABLE CONCENTRATOR KIT | CENTRAL ROD SUSPENSION

PHOTOMETRY



OPAL | MICROPRISMATIC

INCLUDED (.PN)



CB03 CONNECTION BOX

SC03.SA WIRE 3M.

PROFILE



OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FOR MODEL	FINISH
	26 Ø150	**CB02**	.45 .65	●
	 47 Ø310	**CB05**	.95 .125	

Reference order | CBXX.XX ●

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
	Ø125 + CB02	**SC22**	.45 .65	●
	Ø215 + CB05	**SC23**	.95 .125	

Reference order | SCXX.XX ●

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	**5M.**	**.SA**
	SC07	**7M.**	
	SC10	**10M.**	

Reference order | SCXX.SA

CENTRAL ROD SUSPENSION*	CONNECTION BOX	REF.	DIMENSIONS ⬟	FINISH
	 40 Ø102	**SC20**	**.60** 600mm	●
			.80 800mm	
			.100 1000mm	

* Luminaire .95 and .125 require 3 rod suspensions. *Luminarias .95 y .125 requieren 3 tijas.*

Reference order | SC20.XX.XX ⬟ ●

FINISHES

● EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ SIZES mm. | HEIGHT 114 mm.

350x350 | 450x450 | 650x650 | 950x950 | 1250x1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
4 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
Connection box CB09.12 with luminaire's finish
.SR
Surface mounting kit

ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

INSTALLATIONS



FLORIDA
SQ

REF 10191.PN | 10191.SR

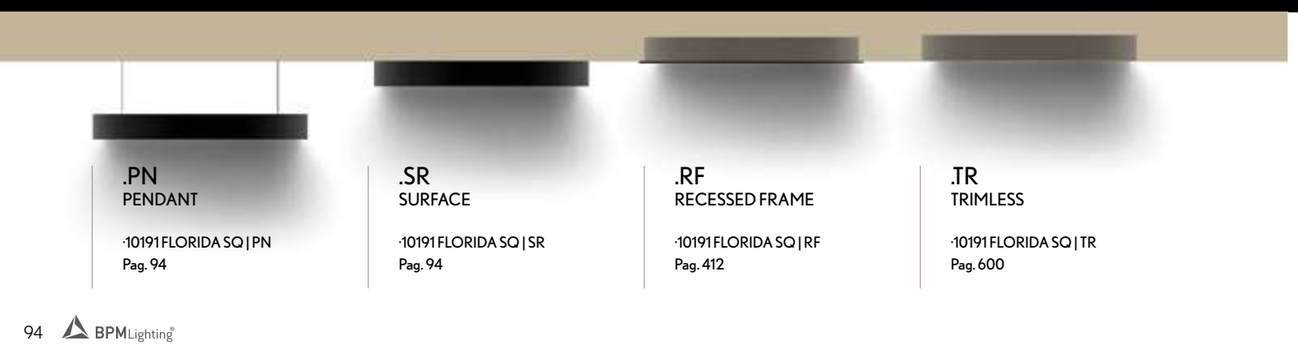

.PN
PENDANT

·10191 FLORIDA SQ | PN
Pag. 94

.SR
SURFACE

·10191 FLORIDA SQ | SR
Pag. 94

.RF
RECESSED FRAME

·10191 FLORIDA SQ | RF
Pag. 412

.TR
TRIMLESS

·10191 FLORIDA SQ | TR
Pag. 600



FLORIDA SQ	REF.	DIMEN-SION ⬟	FINISH	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT LUMEN	DOWNLIGHT WATT	DOWNLIGHT mA	UPLIGHT ▲.UP *1 LUMEN	UPLIGHT ▲.UP *1 WATT	DIMM ▼	SKETCH
	10191	**.35**	●	**.OP .MP**	**.ST**	**.9**	**.27**	2706	27	700	470	7	**.DA .PU .D1**	
							.30	2940			487			
							.40	3000			619			
	10191	**.45**	●	**.OP .MP**	**.ST**	**.9**	**.27**	5412	55	700	658	10	**.DA .PU .D1**	
							.30	5880			682			
							.40	6000			867			
	10191	**.65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	10824	109	700	1034	15	**.DA .PU .D1**	
							.30	11760			1071			
							.40	12000			1362			
	10191	**.95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	21648	218	700	1598	24	**.DA .PU .D1**	
							.30	23520			1656			
							.40	24000			2105			
	10191	**.125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	36080	364	700	2162	32	**.DA .PU .D1**	
							.30	39200			2240			
							.40	40000			2847			

Reference order | 10191.XX | .SR .PN | .XX.XX.ST9.XX.XX.XX

*1 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*

- Select finishes

FLORIDA SQ

REF 10191.PN | 10191.SR

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED (.PN)



CB09.12
CONNECTION BOX

SC03.SA
WIRE 3M.

PROFILE



FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 50 mm.

250 | 350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

SILICONE

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

INSIDE

LUMINAIRE INCLUDES

.PN
3 x Suspension cables 3m
DIM or NON-DIM: 1 x Feed Hose 3 x 0,75mm²
.SR
Surface mounting kit

REMOTE

ON DEMAND

Special RAL Color
Tunable White
RGB
Other Dimensions

new

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS

ALUMINIUM SILICONE · 0° · 0° · CRI ≥90 · IK06 · IP40 · LIFE 50000H · DIM OPTIONAL · REMOTE · INDOOR · 220-240 V 50-60 Hz · CE

ALBERTA
INSIDE

REF 10243.PN | 10243.SR

.PN
PENDANT

·10243 ALBERTA INSIDE | PN
Pag. 98

.SR
SURFACE

· 10243 ALBERTA INSIDE | SR
Pag. 98



ALBERTA INSIDE	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER OPTIONS ■	POWER	CRI	K	LUMEN MAX.	WATT	VdC	DIMM OPT. ▼	SKETCH
	10243	.25	●	.SI	.ST	.9	.27	3048	23	24	.DA .PU .D1	50 Int. Ø 204 Ext. Ø 250
							.30	3156				
							.40	3247				
	10243	.35	●	.SI	.ST	.9	.27	4271	32	24	.DA .PU .D1	50 Int. Ø 304 Ext. Ø 350
							.30	4422				
							.40	4550				
	10243	.45	●	.SI	.ST	.9	.27	5490	41	24	.DA .PU .D1	50 Int. Ø 404 Ext. Ø 450
							.30	5685				
							.40	5849				
	10243	.65	●	.SI	.ST	.9	.27	7931	59	24	.DA .PU .D1	50 Int. Ø 604 Ext. Ø 650
							.30	8213				
							.40	8450				
	10243	.95	●	.SI	.ST	.9	.27	11588	86	24	.DA .PU .D1	50 Int. Ø 904 Ext. Ø 950
							.30	12000				
							.40	12346				
	10243	.125	●	.SI	.ST	.9	.27	15245	113	24	.DA .PU .D1	50 Int. Ø 1204 Ext. Ø 1250
							.30	15787				
							.40	16243				

Reference order | 10243.XX | .SR .PN | .XX.SI.ST.9.XX.XX

OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FOR MODEL	FINISH
	40 Ø102	CB10	.25 .35	●
	26 Ø150	CB02	.45 .65	
	 47 Ø310	CB05	.95 .125	

Reference order | CBXX.XX

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
	 Ø85 + CB10	SC21	.25 .35	●
	 Ø125 + CB02	SC22	.45 .65	
	 Ø215 + CB05	SC23	.95 .125	

Reference order | SCXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

BOXES (.PN) Not-included, please select:

CONNECTION BOX AND DRIVER BOX FOR REMOTE DRIVER		DRIVER BOX NON-DIMM		DRIVER BOX DIMMABLE		FINISH
40 Ø102 418 40		 300 Ø66	 50 320 80	380 Ø66	 50 400 80	●
CB03	CB04.OP *	CB08.30	CB06.32	CB08.38	CB06.40	

* No finish color, use this reference as it is (CB04.OP).
Sin acabado de color, la referencia es tal cual (CB04.OP)

Reference order | CBXX.XX

.SR
.PN
PENDANT | SURFACE

● Select finishes

ALBERTA INSIDE

REF 10243.PN | 10243.SR

SUSPENSION OPTIONS (.PN)

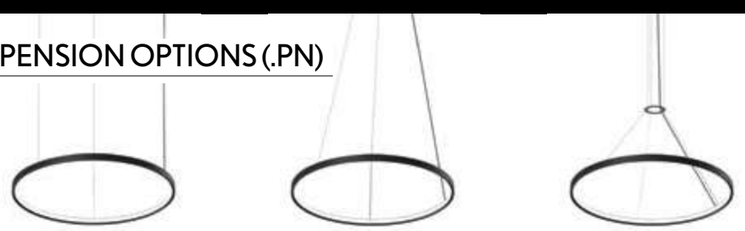

DEFAULT | CABLE CONCENTRATOR | CABLE CONCENTRATOR KIT

PHOTOMETRY

SILICONE

INCLUDED



(.PN) SC03.SA WIRE 3M. | (.SR) INSTALATION KIT

PROFILE



23

FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 50 mm.

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

SILICONE

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

INSIDE

LUMINAIRE INCLUDES

2 x Suspension cables 3m
DIM or NON-DIM: 1 x Feed Hose 3 x 0,75mm²

new

REMOTE

ON DEMAND

Special RAL Color
Number of switches
Tunable White
RGB

.PN

PENDANT

INSTALLATIONS

ALUMINIUM SILICONE | 0° | 0° | CRI ≥90 | IK06 | IP40 | LIFE 50000H | DIM OPTIONAL | | REMOTE | INDOOR | 220-240 V 50-60 Hz | CE

ALBERTA
INSIDE VERTICAL

REF. 310008.PN



.PN
PENDANT

·310008 ALBERTA INSIDE VERTICAL | PN
Pag. 102

ALBERTA INSIDE VERTICAL	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM OP. ▼	SKETCH
	310008	**.35**	●	**.SI**	**.ST**	**.9**	**.27**	4271	32	24	**.DA .PU .D1**	
							.30	4422				
							.40	4550				
	310008	**.45**	●	**.SI**	**.ST**	**.9**	**.27**	5490	41	24	**.DA .PU .D1**	
							.30	5685				
							.40	5849				
	310008	**.65**	●	**.SI**	**.ST**	**.9**	**.27**	7931	59	24	**.DA .PU .D1**	
							.30	8213				
							.40	8450				
	310008	**.95**	●	**.SI**	**.ST**	**.9**	**.27**	11588	86	24	**.DA .PU .D1**	
							.30	12000				
							.40	12346				
	310008	**.125**	●	**.SI**	**.ST**	**.9**	**.27**	15245	113	24	**.DA .PU .D1**	
							.30	15787				
							.40	16243				

Reference order | 310008.XX.PN.XX.SI.ST.9.XX.XX

BOXES (.PN) Not-included, please select:

CONNECTION BOX AND DRIVER BOX FOR REMOTE DRIVER		DRIVER BOX NON-DIMM	DRIVER BOX DIMMABLE		FINISH
						●
CB03	**CB04.OP** *	**CB08.30**	**CB06.32**	**CB08.38**	**CB06.40**	

* No finish color, use this reference as it is (CB04.OP).
Sin acabado de color, la referencia es tal cual (CB04.OP)

Reference order | CBXX.XX

.PN

PENDANT

● Select finishes

ALBERTA
INSIDE VERTICAL

REF. 310008.PN

PHOTOMETRY

SILICONE

INCLUDED

SC03.SA
WIRE 3M.

PROFILE



FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 50 mm.

350 | 450

LIGHTING OPTIONS

■ DIFFUSERS

SILICONE

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

SIDE

LUMINAIRE INCLUDES

Movable component for fastening to the ceiling.
CENTRAL ROD SC20.60.XX

new

REMOTE

ON DEMAND

Special RAL Color
Number of switches
Tunable White
RGB

.PN

PENDANT

INSTALLATIONS



ALBERTA
INSIDE VTILT

REF. 310009.PN

.PN
PENDANT

·310009 ALBERTA INSIDE VTILT
Pag. 106

ALBERTA INSIDE VTILT	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM * ▼	SKETCH
	310009	.35	●	.SI	.ST	.9	.27	4271	32	24	.DA .PU .D1	
							.30	4422				
							.40	4550				
	310009	.45	●	.SI	.ST	.9	.27	5490	41	24	.DA .PU .D1	
							.30	5685				
							.40	5849				

Reference order | ⬟ ● ■ ▼ 310009.XX.PN.XX.SI.ST.9.XX.XX

SUSPENSION ROD	REF.	DIMENSIONS ⬟	FINISH
	SC20	.80 800mm	●
		.100 1000mm	

Reference order | ⬟ ● SC20.XX.XX

● Select finishes

ALBERTA
INSIDE VTILT

REF. 310009.PN

PHOTOMETRY



SILICONE

INCLUDED



SUSPENSION ROD SC20.60

PROFILE



FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 30 mm.

250 | 350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

SILICONE

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

INSIDE - OUTSIDE

LUMINAIRE INCLUDES

3 x Suspension cables 3m
DIM or NON-DIM: 1 x Feed Hose 3 x 0,75mm²

new

REMOTE

ON DEMAND

Special RAL Color
Number of switches
Tunable White
RGB

.PN
PENDANT

PENDANT

INSTALLATIONS

ALUMINIUM SILICONE | 0° | 0° | CRI ≥90 | IK06 | IP40 | LIFE 50000H | DIM OPTIONAL | REMOTE | INDOOR | 220-240 V 50-60 Hz | CE

ALBERTA
DUE

REF 10250.PN

.PN
PENDANT

·10250 ALBERTA DUE | PN
Pag. 110

ALBERTA DUE	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN MAX.	WATT	VdC	DIMM OP. ▼	SKETCH
	10250	.25	●	.SI	.ST	.9	.27	2638	24	24V	.DA .PU .D1	 30 Int Ø160 Ext Ø260
							.30	2638				
							.40	2640				
	10250	.35	●	.SI	.ST	.9	.27	3694	33	24V	.DA .PU .D1	 30 Int Ø260 Ext Ø360
							.30	3696				
							.40	3700				
	10250	.45	●	.SI	.ST	.9	.27	4750	42	24V	.DA .PU .D1	 30 Int Ø360 Ext Ø460
							.30	4752				
							.40	4754				
	10250	.65	●	.SI	.ST	.9	.27	6862	61	24V	.DA .PU .D1	 30 Int Ø560 Ext Ø660
							.30	6866				
							.40	6870				
	10250	.95	●	.SI	.ST	.9	.27	10024	90	24V	.DA .PU .D1	 30 Int Ø860 Ext Ø960
							.30	10030				
							.40	10036				
	10250	.125	●	.SI	.ST	.9	.27	13188	118	24V	.DA .PU .D1	 30 Int Ø1160 Ext Ø1260
							.30	13196				
							.40	13204				

Reference order | 10250.XX .PN.XX.SI.ST.9.XX.XX

OPTIONS

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FOR MODEL	FINISH
	40 Ø102	CB10	.25 .35	●
	26 Ø150	CB02	.45 .65	
	 47 Ø310	CB05	.95 .125	

Reference order | CBXX.XX ●

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
	 Ø85 + CB10	SC21	.25 .35	●
	 Ø125 + CB02	SC22	.45 .65	
	Ø215 + CB05	SC23	.95 .125	

Reference order | SCXX.XX ●

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

BOXES (.PN) Not-included, please select:

CONNECTION BOX AND DRIVER BOX FOR REMOTE DRIVER		DRIVER BOX NON-DIMM		DRIVER BOX DIMMABLE		FINISH
40 Ø102 40 418		 300 Ø66	 50 320 80	 380 Ø66	 50 400 80	●
CB03	CB04.OP *	CB08.30	CB06.32	CB08.38	CB06.40	

* No finish color, use this reference as it is (CB04.OP).
Sin acabado de color, la referencia es tal cual (CB04.OP)

Reference order | CBXX.XX ●

.PN

PENDANT

● Select finishes

.WH-WH .BK-BK .GC-GC .BM-BM .BS-BS .BC-BC .CR-CR .CB-CB .GY-GY .MG-MG .VC-VC .YM-YM

ALBERTA DUE

REF 10250.PN

SUSPENSION OPTIONS

DEFAULT | CABLE CONCENTRATOR | CABLE CONCENTRATOR KIT

PHOTOMETRY

SILICONE

INCLUDED

SC03.SA
WIRE 3M.

PROFILE



FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 30 mm

350 | 450

LIGHTING OPTIONS

■ DIFFUSERS

SILICONE

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

INSIDE - OUTSIDE

LUMINAIRE INCLUDES

Connection box with luminaire's finish

new

REMOTE

ON DEMAND

Special RAL Color
Number of switches
Tunable White
RGB

.PN

PENDANT

INSTALLATIONS

ALUMINIUM SILICONE · 45° · 0° · CRI ≥90 · IK06 · IP40 · LIFE 50000H · DIM OPTIONAL · REMOTE · INDOOR · 220-240 V 50-60 Hz · CE

ALBERTA
DUE MOVE

REF 310004.PN

.PN PENDANT

·310004 ALBERTA DUE MOVE | PN
Pag. 114

ALBERTA DUE MOVE	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN MAX.	WATT	VdC	DIMM OP. ▼	SKETCH
	310004	**.35**	●	**.SI**	**.ST**	**.9**	**.27**	3694	33	24	**.DA .PU .D1**	
							.30	3696				
							.40	3700				
	310004	**.45**	●	**.SI**	**.ST**	**.9**	**.27**	4750	42	24	**.DA .PU .D1**	
							.30	4752				
							.40	4754				

Reference order | 310004.XX .PN.XX.XX.ST.9.XX.XX

.PN

PENDANT

- Select finishes

ALBERTA
DUE MOVE

REF 310004.PN

PHOTOMETRY

SILICONE

INCLUDED



PLATEN

PROFILE



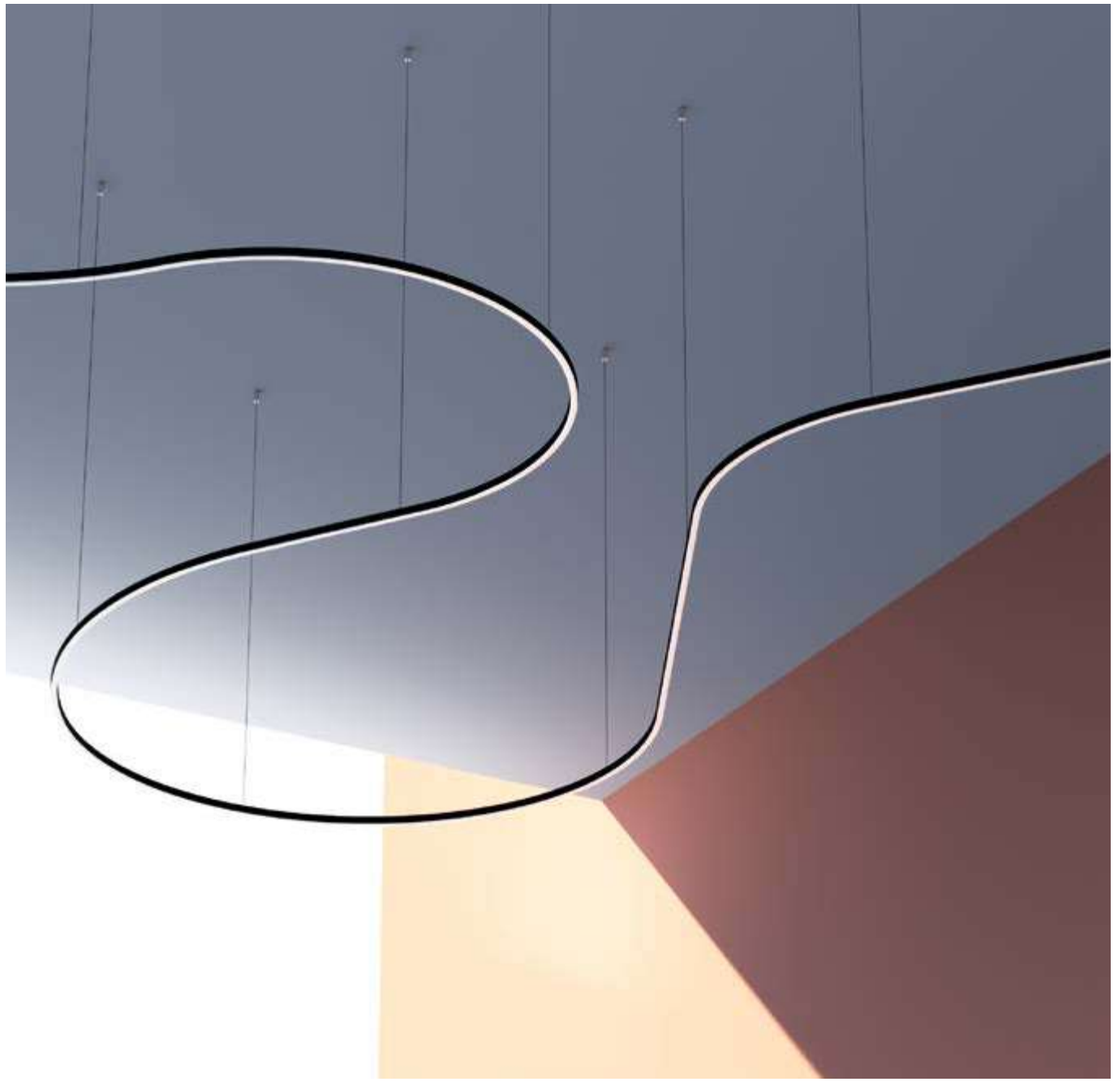

FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 38 mm.

350 | 450 | 650 | 950 | 1250 | 1500

2000 | 2500 | 3000 | 3500 | 4000 | 5000 | 6000

LIGHTING OPTIONS

■ DIFFUSERS

SILICONE

POWERS

HIGH

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
For feed hoses and suspension details refer to mapping table in page 123
.SR
Surface mounting kit

REMOTE

ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Tunable White
RGB
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS

ALUMINIUM SILICONE | 0° | 0° | CRI ≥90 | IK08
IP40 | LIFE 50000H | DIM OPTIONAL | | REMOTE
INDOOR | | 220-240 V 50-60 Hz | CE

ALBERTA
SOFT

REF 10217.PN | 10217.SR

.PN
PENDANT

·10217 ALBERTA SOFT | PN
Pag. 118

.SR
SURFACE

· 10217 ALBERTA SOFT | SR
Pag. 118

.RF
RECESSED FRAME

·10217 ALBERTA SOFT | RF
Pag. 416

ALBERTA SOFT	REF.	DIMEN-SION ⬟	FINISH	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT LUMEN	DOWNLIGHT WATT	DOWNLIGHT mA	UPLIGHT ▲.UP *1 LUMEN	UPLIGHT ▲.UP *1 WATT	DIMM ▼	SKETCH
	10217	**.35**	●	**.SI**	**.HI**	**.9**	**.27**	5280	56	700	3960	30	**.DA .PU .D1**	38 Int. Ø 286 Ext. Ø 350
							.30	5316			4136			
							.40	5844			4158			
	10217	**.45**	●	**.SI**	**.HI**	**.9**	**.27**	7086	70	700	5092	40	**.DA .PU .D1**	38 Int. Ø 386 Ext. Ø 450
							.30	7121			5318			
							.40	7747			5346			
	10217	**.65**	●	**.SI**	**.HI**	**.9**	**.27**	8785	86	700	7356	58	**.DA .PU .D1**	38 Int. Ø 586 Ext. Ø 650
							.30	9040			7682			
							.40	9687			7724			
	10217	**.95**	●	**.SI**	**.HI**	**.9**	**.27**	13298	129	700	10746	84	**.DA .PU .D1**	38 Int. Ø 886 Ext. Ø 950
							.30	13519			11224			
							.40	14703			11284			
	10217	**.125**	●	**.SI**	**.HI**	**.9**	**.27**	17816	172	700	14138	112	**.DA .PU .D1**	38 Int. Ø 1186 Ext. Ø 1250
							.30	18135			14766			
							.40	18118			14846			
	10217	**.150**	●	**.SI**	**.HI**	**.9**	**.27**	-	185	500	-	134	**.DA .PU .D1**	38 Int. Ø 1436 Ext. Ø 1500
							.30	25440			17722			
							.40	26400			17816			
	10217	**.200**	●	**.SI**	**.HI**	**.9**	**.27**	-	253	500	-	180	**.DA .PU .D1**	38 Int. Ø 1936 Ext. Ø 2000
							.30	34185			23628			
							.40	35475			23754			

*1 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*

ALBERTA SOFT	REF.	DIMEN-SION ⬟	FINISH	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT LUMEN	DOWNLIGHT WATT	DOWNLIGHT mA	UPLIGHT ▲.UP* LUMEN	UPLIGHT ▲.UP* WATT	DIMM ▼	SKETCH
	10217	**.250**	●	**.SI**	**.HI**	**.9**	**.27**	-	318	500	-	226	**.DA .PU .D1**	38 Int. Ø 2436 Ext. Ø 2500
							.30	42930			42930			
							.40	44550			44550			
	10217	**.300**	●	**.SI**	**.HI**	**.9**	**.27**	-	383	500	-	270	**.DA .PU .D1**	38 Int. Ø 2936 Ext. Ø 3000
							.30	51675			51675			
							.40	53625			53625			
	10217	**.350**	●	**.SI**	**.HI**	**.9**	**.27**	-	433	700	-	316	**.DA .PU .D1**	 38 Int. Ø 3436 Ext. Ø 3500
							.30	59875			60420			
							.40	62843			62700			
	10217	**.400**	●	**.SI**	**.HI**	**.9**	**.27**	-	513	500	-	360	**.DA .PU .D1**	38 Int. Ø 3936 Ext. Ø 4000
							.30	69165			69165			
							.40	71775			71775			
	10217	**.500**	●	**.SI**	**.HI**	**.9**	**.27**	-	643	500	-	452	**.DA .PU .D1**	38 Int. Ø 4936 Ext. Ø 5000
							.30	86655			87395			
							.40	89925			90860			
	10217	**.600**	●	**.SI**	**.HI**	**.9**	**.27**	-	772	500	-	542	**.DA .PU .D1**	38 Int. Ø 5936 Ext. Ø 6000
							.30	104145			104874			
							.40	108075			109032			

Reference order | 10217.XX | .SR .PN | .XX.XX.HI9.XX.XX.XX

*1 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*

.SR

.PN

PENDANT | SURFACE

- Select finishes



ALBERTA SOFT

REF 10217.PN | 10217.SR

SUSPENSION OPTIONS (.PN)

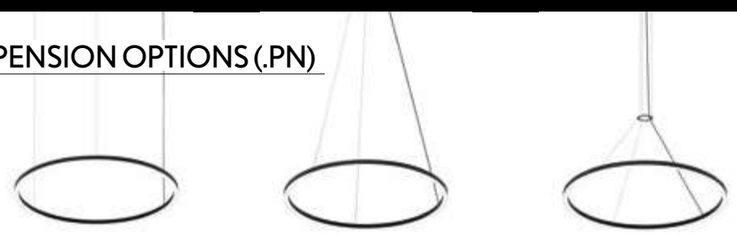

DEFAULT | CABLE CONCENTRATOR | CABLE CONCENTRATOR KIT

PHOTOMETRY



SILICONE

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



OPTIONS (.PN) Only for .35 .45 .65 .95 .125 .150 models

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FOR MODEL	FINISH
	40 Ø102	**CB10**	.35	●
	26 Ø150	**CB02**	.45 .65	
	47 Ø310	**CB05**	.95 .125 .150	

Reference order | CBXX.XX

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
	 Ø85 + CB10	**SC21**	.35	●
	 Ø125 + CB02	**SC22**	.45 .65	
	Ø215 + CB05	**SC23**	.95 .125 .150	

Reference order | SCXX.XX

All models

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	**5M.**	.SA
	SC07	**7M.**	
	SC10	**10M.**	

Reference order | SCXX.SA

BOXES (.PN) Not-included, please select:

CONNECTION BOX AND DRIVER BOX FOR REMOTE DRIVER		DRIVER BOX NON-DIMM		DRIVER BOX DIMMABLE		FINISH
40 Ø102 418 40		 30 45 320	 300 Ø66	 30 45 400	380 Ø66	●
CB03	**CB04.OP** *	**CB09.32**	**CB08.30**	**CB09.40**	**CB08.38**	

* No finish color, use this reference as it is (CB04.OP).
Sin acabado de color, la referencia es tal cual (CB04.OP)

Reference order | CB09.XX.XX

LUMINAIRE INCLUDES (.PN)

LUMINAIRE´S DIMENSION	FEED HOSES		SUSPENSIONS
	DOWN	DOWN + UP	
.35	1 Feed Hose 3 x 0,75mm²	1 Feed Hose 5 x 0,75mm²	3
.45	1 Feed Hose 3 x 0,75mm²	1 Feed Hose 5 x 0,75mm²	3
.65	1 Feed Hose 3 x 0,75mm²	1 Feed Hose 5 x 0,75mm²	3
.95	1 Feed Hose 3 x 0,75mm²	1 Feed Hose 5 x 0,75mm²	3
.125	1 Feed Hose 5 x 0,75mm²	1 Feed Hose 5 x 0,75mm² 1 Feed Hose 3 x 0,75mm²	3
.150	1 Feed Hose 5 x 0,75mm²	1 Feed Hose 5 x 0,75mm² 1 Feed Hose 3 x 0,75mm²	3
.200	2 Feed Hose 3 x 0,75mm²	2 Feed Hose 5 x 0,75mm²	6
.250	3 Feed Hose 3 x 0,75mm²	3 Feed Hose 5 x 0,75mm²	9
.300	4 Feed Hose 3 x 0,75mm²	4 Feed Hose 5 x 0,75mm²	12
.350	4 Feed Hose 3 x 0,75mm²	4 Feed Hose 5 x 0,75mm²	12
.400	5 Feed Hose 3 x 0,75mm²	5 Feed Hose 5 x 0,75mm²	15
.500	7 Feed Hose 3 x 0,75mm²	7 Feed Hose 5 x 0,75mm²	21
.600	8 Feed Hose 3 x 0,75mm²	8 Feed Hose 5 x 0,75mm²	24

● Select finishes

ALBERTA
SOFT

REF 10217.PN | 10217.SR

ONCE FOUNDATION -ESPACIA, MADRID - SPAIN | PHOTO: PABLO CAULÍN

FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 80 mm.

450 | 650 | 950 | 1250 | 1500 | 2000

2500 | 3000 | 4000 | 5000 | 6000

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
3 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
Connection box CB03 with luminaire's finish
.SR
Surface mounting kit

ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
Motion Detection
Tunable White
Wireless Control Options (Casambi)
Other Dimensions

* Delivered separately
(not installed in luminaire).

INSTALLATIONS



ALBERTA
SLIGHT

REF 10193.PN | 10193.SR

.PN
PENDANT

·10193 ALBERTA SLIGHT | PN
Pag. 124

.SR
SURFACE

·10193 ALBERTA SLIGHT | SR
Pag. 124



ALBERTA SLIGHT	REF.	DIMEN-SION ⬟	FINISH	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT LUMEN	DOWNLIGHT WATT	DOWNLIGHT mA	UPLIGHT ▲.UP *1 LUMEN	UPLIGHT ▲.UP *1 WATT	DIMM ▼	SKETCH
	10193	**.45**	●	**.OP .MP**	**.ST**	**.9**	**.27**	3157	32	700	605	9	**.DA .PU .D1**	80 Int. Ø230 Ext. Ø450
							.30	3430			627			
							.40	3500			797			
	10193	**.65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	3608	36	700	901	13	**.DA .PU .D1**	80 Int. Ø430 Ext. Ø650
							.30	3920			933			
							.40	4000			1186			
	10193	**.95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	7216	73	700	1344	20	**.DA .PU .D1**	80 Int. Ø710 Ext. Ø950
							.30	7840			1392			
							.40	8000			1770			
	10193	**.125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	10824	109	700	1787	27	**.DA .PU .D1**	80 Int. Ø990 Ext. Ø1250
							.30	11760			1851			
							.40	12000			2353			
	10193	**.150**	●	**.OP .MP**	**.ST**	**.9**	**.27**	13530	136	700	2156	32	**.DA .PU .D1**	80 Int. Ø1240 Ext. Ø1500
							.30	14700			2234			
							.40	15000			2839			
	10193	**.200**	●	**.OP .MP**	**.ST**	**.9**	**.27**	18942	191	700	2894	43	**.DA .PU .D1**	80 Int. Ø1740 Ext. Ø2000
							.30	20580			2999			
							.40	21000			3812			
	10193	**.250**	●	**.OP .MP**	**.ST**	**.9**	**.27**	28864	291	700	3632	54	**.DA .PU .D1**	80 Int. Ø2220 Ext. Ø2500
							.30	31360			3764			
							.40	32000			4784			
	10193	**.300**	●	**.OP .MP**	**.ST**	**.9**	**.27**	30668	309	700	4371	65	**.DA .PU .D1**	80 Int. Ø2720 Ext. Ø3000
							.30	33320			4529			
							.40	34000			5756			
	10193	**.400**	●	**.OP .MP**	**.ST**	**.9**	**.27**	37884	382	700	5847	87	**.DA .PU .D1**	80 Int. Ø3720 Ext. Ø4000
							.30	41160			6059			
							.40	42000			7701			

Reference order | 10193.XX⬟ | .SR / .PN | ●.XX.XX■.ST.9.XX▼.XX.XX▲

● Select finishes



*1 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*

ALBERTA SLIGHT	REF.	DIMEN-SION ⬟	FINISH	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT LUMEN	DOWNLIGHT WATT	DOWNLIGHT mA	UPLIGHT ▲.UP *1 LUMEN	UPLIGHT ▲.UP *1 WATT	DIMM ▼	SKETCH
	10193	**.500**	●	**.OP .MP**	**.ST**	**.9**	**.27**	46904	473	700	7324	109	**.DA .PU .D1**	 80 Int. Ø4700 Ext. Ø5000
							.30	50960			7589			
							.40	52000			9645			
	10193	**.600**	●	**.OP .MP**	**.ST**	**.9**	**.27**	54120	546	700	8800	131	**.DA .PU .D1**	 80 Int. Ø5700 Ext. Ø6000
							.30	58800			9119			
							.40	60000			11590			

OPTIONS (.PN) Only for .35 .45 .65 .95 .125 .150 models

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FOR MODEL	FINISH
	26 Ø150	**CB02**	.45 .65	●
	 47 Ø310	**CB05**	.95 .125	

All models — Reference order | CBXX.XX

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
	 Ø125 + CB02	**SC22**	.45 .65	●
	Ø215 + CB05	**SC23**	.95 .125	

Reference order | SCXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	**SC05**	**5M.**	**.SA**
	SC07	**7M.**	
	SC10	**10M.**	

Reference order | SCXX.SA

ALBERTA SLIGHT

REF 10193.PN | 10193.SR

PHOTOMETRY



OPAL — MICROPRISMATIC

INCLUDED (.PN)



CB03 CONNECTION BOX

SC03.SA WIRE 3M.

PROFILE



new

FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 80 mm.

650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
3 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
Connection box CB03 with luminaire's finish
.SR
Surface mounting kit

ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS

ALBERTA
SLIGHT ECCENTRIC

REF 310005.PN | 310005.SR

.PN
PENDANT

·310005 ALBERTA SLIGHT ECCENTRIC | PN - Pag. 128

.SR
SURFACE

·310005 ALBERTA SLIGHT ECCENTRIC | SR - Pag. 128

ALBERTA SLIGHT ECCENTRIC	REF.	DIMEN-SION ⬟	FINISH	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT LUMEN	DOWNLIGHT WATT	DOWNLIGHT mA	UPLIGHT ▲UP *1 LUMEN	UPLIGHT ▲UP *1 WATT	DIMM ▼	SKETCH
	310005	**.65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	10373	104	700	901	13	**.DA .PU .D1**	 80 Int. Ø 235 Ext. Ø 650
							.30	11270			933			
							.40	11500			1186			
	310005	**.95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	19393	195	700	1344	20	**.DA .PU .D1**	 80 Int. Ø 430 Ext. Ø 950
							.30	21070			1392			
							.40	21500			1770			
	310005	**.125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	28864	291	700	1787	27	**.DA .PU .D1**	 80 Int. Ø 730 Ext. Ø 1250
							.30	31360			1851			
							.40	32000			2353			

Reference order | 310005.XX ⬟ | .SR .PN | .XX.XX ● ■ .ST.9.XX ▼ .XX.XX ▲

*1 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*

OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FOR MODEL	FINISH ●
	26 Ø150	**CB02**	.65	
	 47 Ø310	**CB05**	.95 .125	

Reference order | ● CBXX.XX

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH ●
	 Ø125 + CB02	**SC22**	.65	
	Ø215 + CB05	**SC23**	.95 .125	

Reference order | ● SCXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH ●
	SC05	**5M.**	**.SA**
	SC07	**7M.**	
	SC10	**10M.**	

Reference order | ● SCXX.XX

Reference order | SCXX.XX ●

● Select finishes

ALBERTA
SLIGHT ECCENTRIC

REF 310005.PN | 310005.SR

SUSPENSION OPTIONS (.PN)

DEFAULT | CABLE CONCENTRATOR | CABLE CONCENTRATOR KIT

PHOTOMETRY



OPAL | MICROPRISMATIC

INCLUDED (.PN)



CB03
CONNECTION BOX

SC03.SA
WIRE 3M.

PROFILE



FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 114 mm.

650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
3 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
Connection box CB03 with luminaire's finish
.SR
Surface mounting kit

ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
CRI 80
Motion Detection
RGB
Wireless Control Options (Casambi)
Other Dimensions

* Delivered separately
(not installed in luminaire).

ALBERTA

REF 10176.PN

INSTALLATIONS

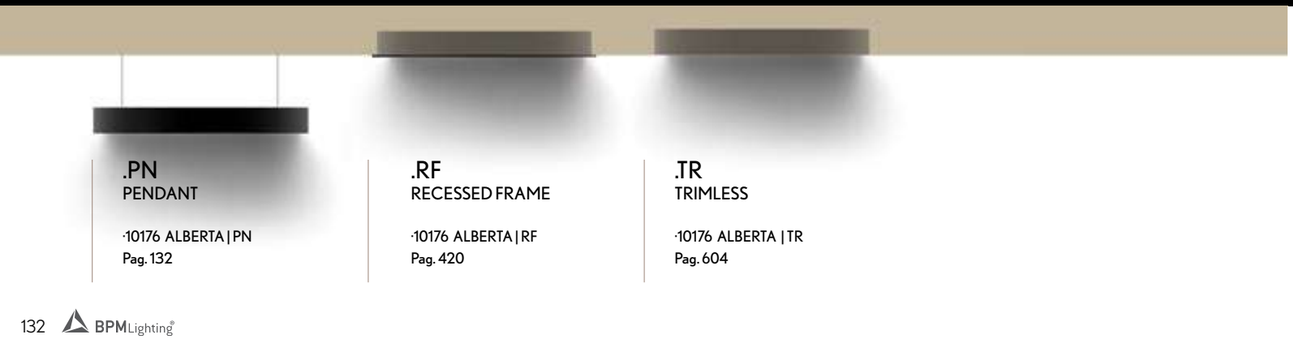

.PN
PENDANT

·10176 ALBERTA | PN
Pag. 132

.RF
RECESSED FRAME

·10176 ALBERTA | RF
Pag. 420

.TR
TRIMLESS

·10176 ALBERTA | TR
Pag. 604





ALBERTA	REF.	DIMEN-SION ⬟	FINISH	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT LUMEN	DOWNLIGHT WATT	DOWNLIGHT mA	UPLIGHT ▲.UP *2 LUMEN	UPLIGHT ▲.UP *2 WATT	DIMM OP. ▼	SKETCH
	10176	.65	●	.OP .MP	.ST	.9	.27	3060	24	500	901	13	.DA .PU .D1	 114 Int. Ø 420 Ext. Ø 650
							.30	3180			933			
							.40	3300			1186			
						.8	.TW *1	9500 - 9850	64	700	-	-	.DA	
					.HI	.9	.27	-	59	500	1932	29	.DA .PU .D1	
							.30	6356			1999			
							.40	6608			2541			
	10176	.95	●	.OP .MP	.ST	.9	.27	6120	47	500	1347	20	.DA .PU .D1	 114 Int. Ø 690 Ext. Ø 950
							.30	6360			1392			
							.40	6600			1770			
						.8	.TW *1	15200 - 15760	102	700	-	-	.DA	
					.HI	.9	.27	-	94	500	2882	43	.DA .PU .D1	
							.30	12712			2982			
							.40	13216			3791			
	10176	.125	●	.OP .MP	.ST	.9	.27	9180	71	500	1787	27	.DA .PU .D1	 114 Int. Ø 990 Ext. Ø 1250
							.30	9540			1851			
							.40	9900			2353			
						.8	.TW *1	22800-23640	152	700	-	-	.DA	
					.HI	.9	.27	-	142	500	3832	57	.DA .PU .D1	
							.30	19068			3965			
							.40	19824			5041			

Reference order | 10176.XX .PN.XX.XX.XX.X.XX.XX.XX

⬟ ● ■ ▼ ▲

OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FOR MODEL	FINISH
	26 Ø150	CB02	.65	●
	 47 Ø310	CB05	.95 .125	

Reference order | CBXX.XX ●

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
	 Ø125 + CB02	SC22	.65	●
	 Ø215 + CB05	SC23	.95 .125	

Reference order | SCXX.XX ●

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

● Select finishes

ALBERTA

REF 10176.PN

PHOTOMETRY

OPAL | MICROPRISMATIC

INCLUDED (.PN)

 40 Ø102

CB03 CONNECTION BOX

SC03.SA WIRE 3M.

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700mA.*

*2 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*

OKKO

Guaranteed success for your lighting projects.

The answer is always yes. There are no limits. Excellent, customisable designs that enhance any architectural and design project. A tasteful, versatile choice that never disappoints.

OK a todas tus propuestas de iluminación.

Ok a todo. Sin límites. Y con gran capacidad de personalización de los embellecedores, para integrarse en proyectos globales de arquitectura y decoración. Sin duda, una elección segura, versátil y que no defrauda.

new

FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm.

650 | 950 | 1250

LIGHTING OPTIONS

■ BEAM ANGLE

20º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN
3 x Suspension cables 3m
NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
.SR
Surface mounting kit

new

REMOTE

ON DEMAND

Emergency Lighting *
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK08
IP40 | LIFE 50000H | DIM OPTIONAL | REMOTE
INDOOR | 220-240 V 50-60 Hz | CE

OKKO
MODULAR

REF 10254.PN | 10254.SR

.PN
PENDANT

·10254 OKKO MODULAR | PN
Pag. 138

.SR
SURFACE

·10254 OKKO MODULAR | SR
Pag. 138

OKKO	REF.	DIMENSION ⬟	FINISH	POSITIONS
	10254	.65	●	10
		.95		15
		.125		20

Reference order | 10254.XX | .SR .PN | .XX

Configure your OKKO combining LED modules and OPAQUE as you wish.
Configura tu OKKO combinando los módulos LED y OPAQUES que desees.

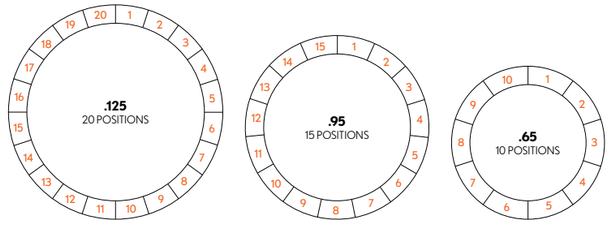

OKKO LED MODULES	REF.	DIMENSION ⬟	FINISH	OPTIC OPTIONS ■	POWER	CRI	LUMEN .27	LUMEN .30	LUMEN .40	WATT	mA	SKETCH
	110003	.65	●	.20 .40 .60	.ST	.9	541	586	671	7	500	 Ø581 int. Ø650 ext. 35 32
		.95					541	586	671	7	500	Ø885 int. Ø955 ext. 35 32
		.125					541	586	671	7	500	Ø1185 int. Ø1255 ext. 35 32

Reference order | ⬟ ● ■ | 110003.XX.XX.XX.ST9.XX

OKKO OPAQUE	REF.	DIMENSION ⬟	FINISH	
	ACC10254	.65	●	
		.95		
		.125		

Reference order | ⬟ ● | ACC10254.XX.XX

OKKO DRIVER	DIMENSION * ⬟		DIMM ▼
DR10254	.01	1 - 4 modules	.DA .PU .D1
	.02	5 - 10 modules	
	.03	11 - 13 modules	
	.04	14 - 17 modules	
	.05	18 - 20 modules	

Reference order | ⬟ ▼ | DR10254.XX.XX

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FOR MODEL	FINISH
	Ø150 26	CB02	.65	●
	 Ø310 47	CB05	.95 .125	

Reference order | ● | CBXX.XX

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
	Ø125 + CB02	SC22	.65	●
	Ø215 + CB05	SC23	.95 .125	

Reference order | ● | SC20.XX

Not-included, please select:

CONNECTION BOX AND DRIVER BOX FOR REMOTE DRIVER		DRIVER BOX NON-DIMM	DRIVER BOX DIMMABLE	FINISH
Ø102 40 418 40		 Ø310 47	 Ø415 34	●
CB03	CB04.OP *	CB05	CB12	

* No finish color, use this reference as it is (CB04.OP).
Sin acabado de color, la referencia es tal cual (CB04.OP)

Reference order | ● | CBXXXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

REFERENCE ORDER EXAMPLE
EJEMPLO DE REFERENCIA



Create an OKKO like the one in the example. *Crea un OKKO como el del ejemplo:*

1	Select PROFILE . *Selecciona PERFIL.*	10254.95.PN.XX
2	Select LED MODULE and quantity. *Selecciona el modulo LED y la cantidad.*	110003.95.XX.XX.ST9.XX (9 Qty./Uds.)
3	Add LED MODULES' position. *Añade la posición de los módulos LED.*	1, 2, 3, 6, 7, 8, 11, 12, 13
4	Add number of OPAQUE diffusers. *Añade el número de difusores OPAQUE.*	ACC10254.95.XX (6 Qty./Uds.)
5	Verify DRIVER depending on the number of LED modules. *Verifica el DRIVER dependiendo del número de módulos LED.*	DR10254.02.XX

● Select finishes

OKKO MODULAR

REF 10254.PN | 10254.SR

Let's create

Give full rein to your immagination. Configure your Okko Modular to suit best your project needs
¡Da rienda suelta a tu imaginación! Configura tu Okko Modular según las necesidades de tu proyecto

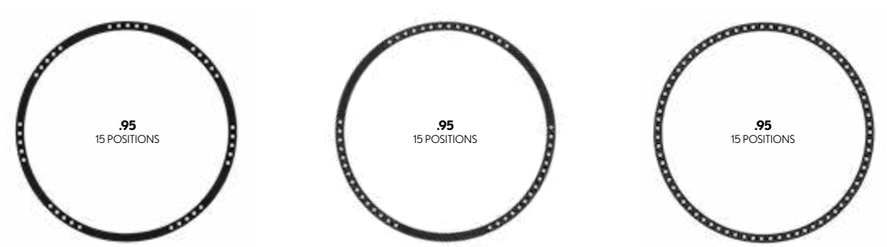

PHOTOMETRY

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm.

650 | 950 | 1250

LIGHTING OPTIONS

■ BEAM ANGLE

20º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN
3 x Suspension cables 3m
NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
.SR
Surface mounting kit

new

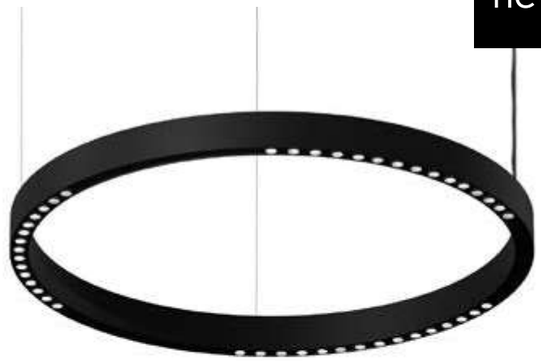



ON DEMAND

Emergency Lighting *
Motion Detection
Wireless Control Options (Casambi)

REMOTE

* Delivered separately
(not installed in luminaire).

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06
IP40 | LIFE 50000H | DIM OPTIONAL | | REMOTE
INDOOR | | 220-240 V 50-60 Hz | CE

OKKO PLUS
MODULAR

REF 10252.PN | 10252.SR

.PN
PENDANT

·10252 OKKOPLUS MODULAR | PN
Pag. 142

.SR
SURFACE

·10252 OKKO PLUS MODULAR| SR
Pag. 142

OKKO PLUS	REF.	DIMENSION ⬟	FINISH	POSITIONS
	10252	.65	●	10
		.95		15
		.125		20

Reference order | 10252.XX ⬟ | .SR | .PN | ● .XX

Configure your OKKO PLUS combining LED modules and OPAQUE as you wish.
Configura tu OKKO PLUS combinando los módulos LED y OPAQUES que desees.

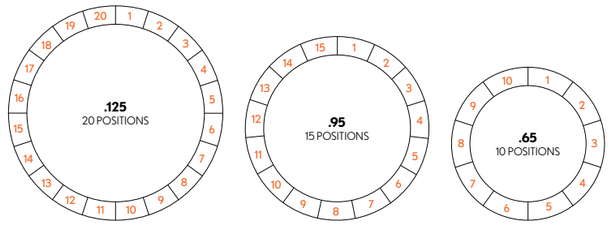

OKKO PLUS LED MODULES	REF.	DIMENSION ⬟	FINISH	OPTIC OPTIONS ■	POWER	CRI	LUMEN .27	LUMEN .30	LUMEN .40	WATT	mA	SKETCH
	110002	.65	●	.20 .40 .60	.ST	.9	541	586	671	7	500	Ø580 int. 35 70 Ø651 ext.
		.95					541	586	671	7	500	Ø884 int. 35 70 Ø955 ext.
		.125					541	586	671	7	500	Ø1184 int. 35 70 Ø1255 ext.

Reference order | 110002.XX.XX.XX.ST.9.XX ⬟ ● ■

OKKO PLUS OPAQUE	REF.	DIMENSION ⬟	FINISH	SKETCH
	ACC10252	.65	●	
		.95		
		.125		

Reference order | ACC10252.XX.XX ⬟ ●

OKKO PLUS DRIVER	DIMENSION ⬟		DIMM ▼
DR10252	.01	1 - 4 modules	.DA .PU .D1
	.02	5 - 10 modules	
	.03	11 - 13 modules	
	.04	14 - 17 modules	
	.05	18 - 20 modules	

Reference order | DR10252.XX.XX ⬟ ▼

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FINISH
	Ø102 40	CB10	●
	Ø150 26	CB02	
	 Ø310 47	CB05	

Reference order | CBXX.XX ●

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
	 Ø125 + CB02	SC22	.65	●
	Ø215 + CB05	SC23	.95 .125	

Reference order | SC20.XX ●

Not-included, please select:

CONNECTION BOX AND DRIVER BOX FOR REMOTE DRIVER		DRIVER BOX NON-DIMM	DRIVER BOX DIMMABLE	FINISH
Ø102 40 418 40		 Ø310 47	 Ø415 34	●
CB03	CB04.OP *	CB05	CB12	

* No finish color, use this reference as it is (CB04.OP).
Sin acabado de color, la referencia es tal cual (CB04.OP)

Reference order | CBXXXX.XX ●

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA ●

REFERENCE ORDER EXAMPLE
EJEMPLO DE REFERENCIA



Create an OKKO PLUS like the one in the example. *Crea un OKKO PLUS como el del ejemplo:*

1	Select PROFILE . *Selecciona PERFIL.*	10252.95.PN.XX
2	Select LED MODULE and quantity. *Selecciona el modulo LED y la cantidad.*	110002.95.XX.XX.ST.9.XX (9 Qty./Uds.)
3	Add LED MODULES' position. *Añade la posición de los módulos LED.*	1, 2, 3, 6, 7, 8, 11, 12, 13
4	Add number of OPAQUE diffusers. *Añade el número de difusores OPAQUE.*	ACC10252.95.XX (6 Qty./Uds.)
5	Verify DRIVER depending on the number of LED modules. *Verifica el DRIVER dependiendo del número de módulos LED.*	DR10252.02.XX

● Select finishes

OKKO PLUS
MODULAR

REF 10252.PN | 10252.SR

Let's create

Give full rein to your immagination. Configure your OKKO PLUS MODULAR to suit best your project needs
¡Da rienda suelta a tu imaginación! Configura tu OKKO PLUS MODULAR según las necesidades de tu proyecto





PHOTOMETRY

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



A blank canvas.

Imagination, illumination. Limitless light. If that sounds good to you, meet our Line Profiles! Extensive, versatile, with reliable technology and features.

It comes with a wide variety of high quality extruded aluminium profiles with opal, microprismatic or silicone diffusers: Alba, Wing, Alzira, Edge, Linggo, Okkia, Bubble and Bold, for the most daring.

Un lienzo en blanco.

Imaginar, proyectar, iluminar. Sin condicionantes. Si eso es lo que se pretende, nuestros perfiles lineales y curvos son la familia de productos ideal. Por extensa, por versátil, por tecnología y prestaciones.

Se presentan en una amplia gama de perfiles de aluminio extruido de alta calidad y con difusores opal, microprismático o silicona: Alba, Wing, Alzira, Edge, Linggo, Okkia, Bubble y Bold, para los más atrevidos.

LINES

PENDANT | SURFACE

ALBA DOUBLE



REF. 10215

WING



REF. 10200

ALBA PLUS ASIMETRIC



REF. 210008

ALBA PLUS



REF. 10178

ALBA NOVUS



REF. 210011

ALZIRA



REF. 10169

ALBA



REF. 10160

ALBA ASIMETRIC



REF. 210009

ALBA MINI



REF. 10211

BOLD



REF. 210001

OKKO MODULAR



REF. 10254

OKKO PLUS MODULAR



REF. 10252

MODULIGHT



REF. 10210

ALARIK



REF. 10225

ALARIK SLIM



REF. 20224

ALARIK MINI



REF. 210006

ALARIK SLIM ROUND



REF. 210019

ALARIK MINI ROUND



REF. 210004

PROFILE OVERVIEW

PENDANT | SURFACE

LINGGO



REF. 210002

LINGGO MINI



REF. 210003

OKKIA



REF. 210007

OKKIA PLUS



REF. 210017

BUBBLE



REF. 210010

EYE



REF. 210016

EDGE



REF. 210014

new

FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

794 | 1189 | 1584 | 1979

LIGHTING OPTIONS

■ BEAM ANGLE

20º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m
NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
.SR
Surface mounting kit

ON DEMAND

Emergency Lighting *
Custom dimensions
Motion Detection
Wireless Control Options (Casambi)

REMOTE

* Delivered separately
(not installed in luminaire).

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS

OKKO
MODULAR LINE

REF 210012.PN | 210012.SR

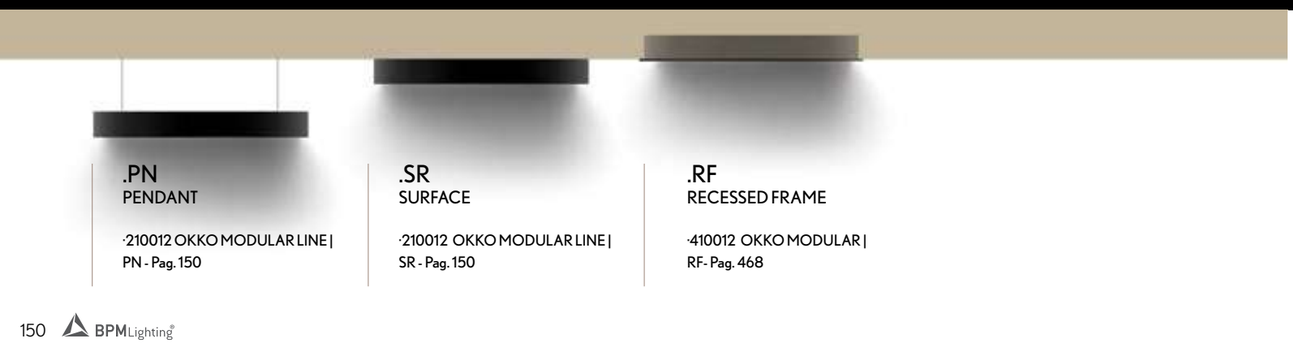

.PN
PENDANT

·210012 OKKO MODULAR LINE | PN - Pag. 150

.SR
SURFACE

·210012 OKKO MODULAR LINE | SR - Pag. 150

.RF
RECESSED FRAME

·410012 OKKO MODULAR | RF- Pag. 468



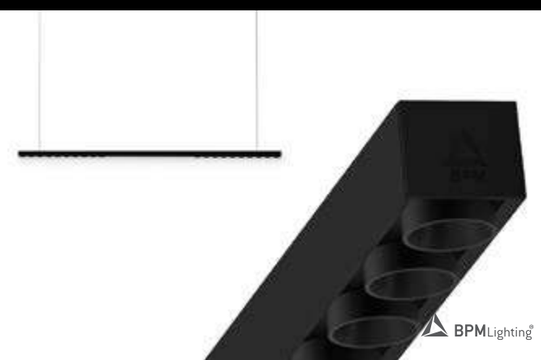

OKKO MODULAR LINE	REF.	DIMENSION ⬟	FINISH	POSITIONS
	210012	.02	●	2
		.03		3
		.04		4
		.05		5

.02 - 2 POSITIONS - 794mm | 1 | 2 |

.03 - 3 POSITIONS - 1189mm | 1 | 2 | 3 |

.04 - 4 POSITIONS - 1584mm | 1 | 2 | 3 | 4 |

.05 - 5 POSITIONS - 1979mm | 1 | 2 | 3 | 4 | 5 |

Reference order | 210012.XX ⬟ | .SR .PN | .XX ●

OKKO LINE LED MODULES	REF.	DIMENSION ⬟	FINISH	OPTIC OPTIONS ■	POWER	CRI	LUMEN .27	LUMEN .30	LUMEN .40	WATT	mA	SKETCH
	110004	.10	●	.20 .40 .60	.ST	.9	1114	1245	1320	12	500	

Reference order | 110004.10.XX.XX.ST.9.XX ⬟ ● ■

OPAQUE	REF.	DIMENSION ⬟	FINISH	SKETCH
	ACC210012	.10	●	

Reference order | ACC210012.10.XX ⬟ ●

OKKO LINE DRIVER	DIMENSION ⬟		DIMM ▼
DR210012	.01	1 - 5 modules	.DA .PU .D1
	.02	6 - 9 modules	
	.03	10 - 13 modules	
	.04	14 - 17 modules	
	.05	18 - 20 modules	

Reference order | DR210012.XX.XX ⬟ ▼

COVERT KIT	REF.	FINISH
	TF24	●

Reference order | TF24 | .SR .PN | .XX ●

Not-included, please select:

CONNECTION BOX AND DRIVER BOX FOR REMOTE DRIVER		DRIVER BOX NON-DIMM	DRIVER BOX DIMMABLE	FINISH
				●
CB09.12	CB04.OP *	CB09.32	CB09.40	

* No finish color, use this reference as it is (CB04.OP).
Sin acabado de color, la referencia es tal cual (CB04.OP)

Reference order | CBXXXX.XX ●

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

REFERENCE ORDER EXAMPLE
EJEMPLO DE REFERENCIA

1	2		4	5

.05 - 5 POSITIONS

Create an OKKO like the one in the example. *Crea un OKKO como el del ejemplo:*

1	Select PROFILE . *Selecciona PERFIL.*	210012.95.PN.XX
2	Select LED MODULE and quantity. *Selecciona el modulo LED y la cantidad.*	110004.95.XX.XX.ST9.XX (4 Qty./Uds.)
3	Add LED MODULES' position. *Añade la posición de los módulos LED.*	1, 2, 4, 5
4	Add number of OPAQUE diffusers. *Añade el número de difusores OPAQUE.*	ACC210012.95.XX (1 Qty./Uds.)
5	Verify DRIVER depending on the number of LED modules. *Verifica el DRIVER dependiendo del número de módulos LED.*	DR210012.02.XX

● Select finishes



OKKO
MODULAR LINE

REF 210012.PN | 210012.SR

PHOTOMETRY

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

794 | 1189 | 1584 | 1979

LIGHTING OPTIONS

■ BEAM ANGLE

20º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m
NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
.SR
Surface mounting kit

new

REMOTE

ON DEMAND

Emergency Lighting *
Custom dimensions
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

PENDANT | SURFACE

.SR

.PN

INSTALLATIONS

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK08
IP40 | LIFE 50000H | DIM OPTIONAL | | REMOTE
INDOOR | | 220-240 V 50-60 Hz | CE

OKKO PLUS
MODULAR LINE

REF 210013.PN | 210013.SR

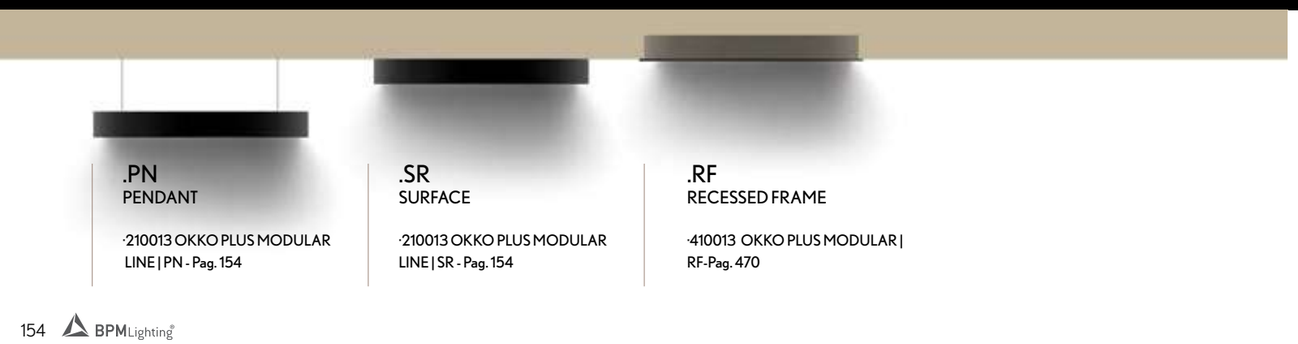

.PN
PENDANT

·210013 OKKO PLUS MODULAR LINE | PN - Pag. 154

.SR
SURFACE

·210013 OKKO PLUS MODULAR LINE | SR - Pag. 154

.RF
RECESSED FRAME

·410013 OKKO PLUS MODULAR | RF-Pag. 470



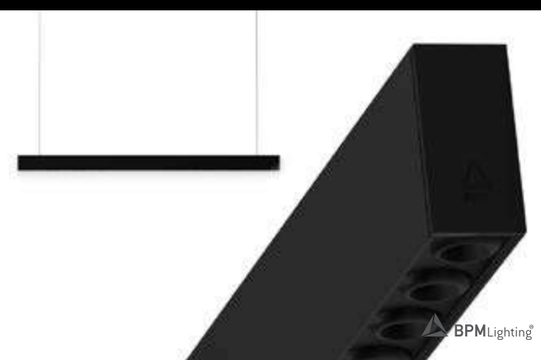

OKKO PLUS LINE	REF.	DIMENSION ⬟	FINISH	POSITIONS
	210013	.02	●	2
		.03		3
		.04		4
		.05		5

.02 - 2 POSITIONS - 796mm | 1 | 2 |

.03 - 3 POSITIONS - 1191mm | 1 | 2 | 3 |

.04 - 4 POSITIONS - 1586mm | 1 | 2 | 3 | 4 |

.05 - 5 POSITIONS - 1981mm | 1 | 2 | 3 | 4 | 5 |

Reference order | 210013.XX (⬟) | .SR / .PN | .XX (●)

OKKO PLUS LED MODULES	REF.	DIMENSION ⬟	FINISH	OPTIC OPTIONS ■	POWER	CRI	LUMEN .27	LUMEN .30	LUMEN .40	WATT	mA	SKETCH
	110005	.10	●	.20 .40 .60	.ST	.9	1114	1245	1320	12	500	

Reference order | ⬟ ● ■ | 110005.10.XX.XX.ST9.XX

OKKO PLUS OPAQUE	REF.	DIMENSION ⬟	FINISH	
	ACC210013	.10	●	

Reference order | ⬟ ● | ACC210013.10.XX

OKKO PLUS LINE DRIVER	DIMENSION ⬟		DIMM ▼
DR210013	.01	1 - 5 modules	.DA .PU .D1
	.02	6 - 9 modules	
	.03	10 - 13 modules	
	.04	14 - 17 modules	
	.05	18 - 20 modules	

Reference order | ⬟ ▼ | DR210013.XX.XX

COVERT KIT	REF.	FINISH
	TF25	●

Reference order | TF25 | .SR / .PN | .XX (●)

● Select finishes

.05 - 5 POSITIONS **.04** - 4 POSITIONS **.03** - 3 POSITIONS **.02** - 2 POSITIONS

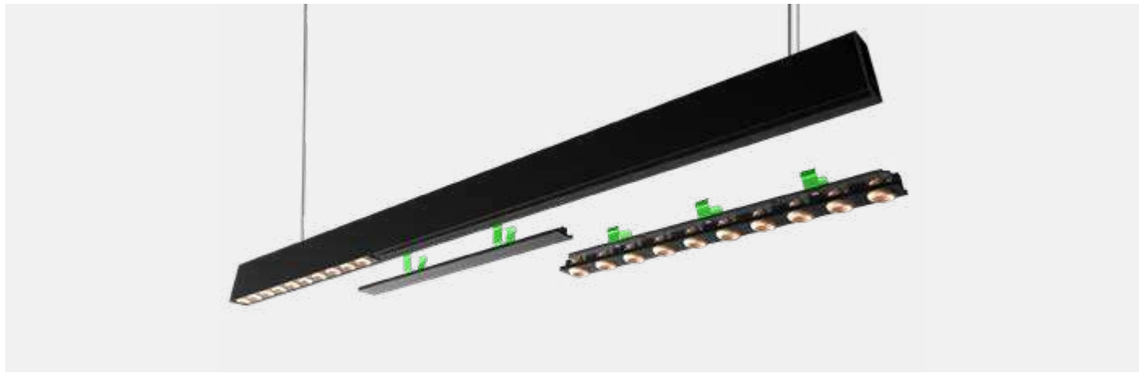

Not-included, please select:

CONNECTION BOX AND DRIVER BOX FOR REMOTE DRIVER		DRIVER BOX NON-DIMM	DRIVER BOX DIMMABLE	FINISH
				●
CB09.12	CB04.OP *	CB09.32	CB09.40	

* No finish color, use this reference as it is (CB04.OP).
Sin acabado de color, la referencia es tal cual (CB04.OP)

Reference order | ● | CBXXXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

REFERENCE ORDER EXAMPLE
EJEMPLO DE REFERENCIA

1	2		4	5

.05 - 5 POSITIONS

Create an OKKO PLUS like the one in the example. *Crea un OKKO PLUS como el del ejemplo:*

1	Select PROFILE . *Selecciona PERFIL.*	210013.95.PN.XX
2	Select LED MODULE and quantity. *Selecciona el modulo LED y la cantidad.*	110005.95.XX.XX.ST9.XX (4 Qty./Uds.)
3	Add LED MODULES' position. *Añade la posición de los módulos LED.*	1, 2, 4, 5
4	Add number of OPAQUE diffusers. *Añade el número de difusores OPAQUE.*	ACC210013.95.XX (1 Qty./Uds.)
5	Verify DRIVER depending on the number of LED modules. *Verifica el DRIVER dependiendo del número de módulos LED.*	DR210013.02.XX

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06 | IP40 | LIFE 50000H | DIM OPTIONAL | REMOTE | INDOOR | 220-240 V 50-60 Hz

OKKO PLUS
MODULAR LINE

REF 210013.PN | 210013.SR

PHOTOMETRY

20º 40º 60º

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



FINISHES

● PROFILE COLORS

● EYE COLORS

DIMENSIONS

● LENGTHS

1m

LIGHTING OPTIONS

■ DIFFUSERS

ACRYLIC

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m (each 2m)
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
.SR
Surface mounting kit

SOON

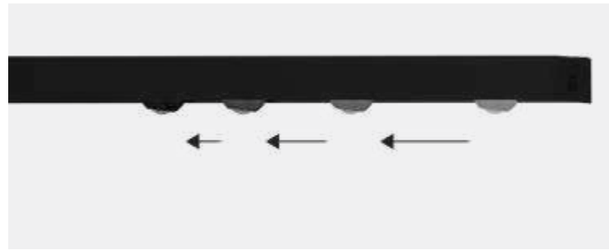

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS

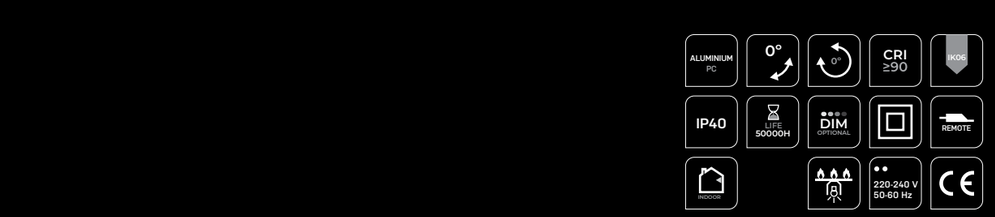

EYE

REF 210016.PN | 210016.SR

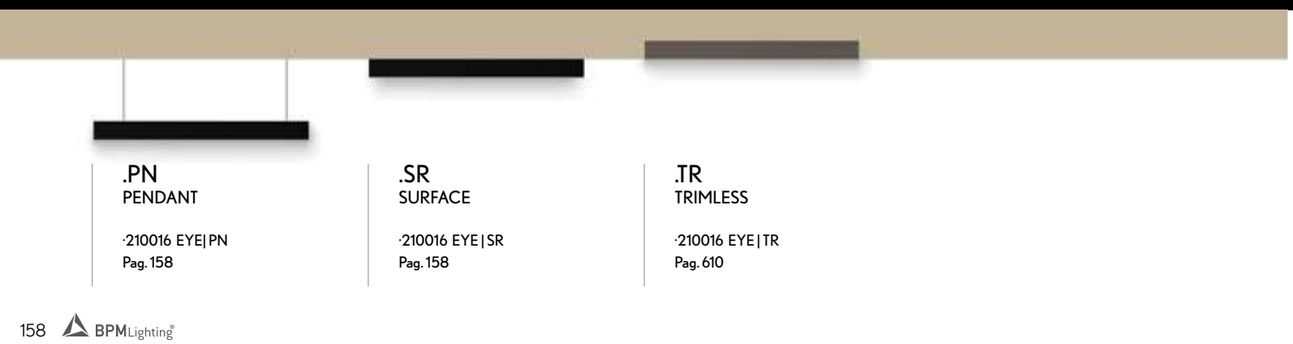

.PN
PENDANT

·210016 EYE|PN
Pag. 158

.SR
SURFACE

·210016 EYE|SR
Pag. 158

.TR
TRIMLESS

·210016 EYE|TR
Pag. 610



EYE	REF.	DIMEN-SION ⬟	FINISH	SKETCH
	210016	**.01 1m.**	**.BK-BK .WH-WH**	

Reference order | 210016.XX ⬟ | .SR .PN | .XX ●

48V TRANSFORMER	DIMENSION ⬟	WATT
DR48	**.01**	75
	.02	120
	.03	200

Reference order | DR48.XX ⬟

EYE MODULE	REF.	DIMENSION ⬟	FINISH	OPTIC OPTIONS ■	POWER	CRI	LUMEN .27	LUMEN .30	LUMEN .40	WATT	VdC	DIMM ▼	SKETCH
	**20210**	**.01**	●	**.AC**	.ST	.9	419	474	510	5	48	-	

Reference order | 20210.01.XX.AC.ST9.XX ⬟ ● ■

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMEN-SION	FINISH
	**SC05**	**5M.**	**.SA**
	SC07	**7M.**	
	SC10	**10M.**	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMEN-SIONS ⬟	mm	FINISH
	**SC21**	**.60**	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX ⬟ ●

BOXES (.PN) Not-included please select

CONNECTION BOX	FINISH
	●
CB09.12	

Reference order | CB09.12.XX ●

COMPONENTS

COVERT KIT	REF.	FINISH
	TF16	●

Reference order | TF16 | .SR .PN | .XX ●

LINEAR JOINT + FLEXIBLE JOINT CONNECTOR	FINISH ●
	**.BK-BK .WH-WH**

Reference order | UR16.XX ●

POWER FEEDER UNIT	FINISH ●
	**.BK-BK .WH-WH**

ACC210016.CA.XX ●

.SR
.PN
PENDANT | SURFACE

● Select profile finishes

.WH-WH .BK-BK

● Select eye finishes



.WH-WH .BK-BK .GC-GC

EYE

REF 210016.PN | 210016.SR

PHOTOMETRY

OPAL

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



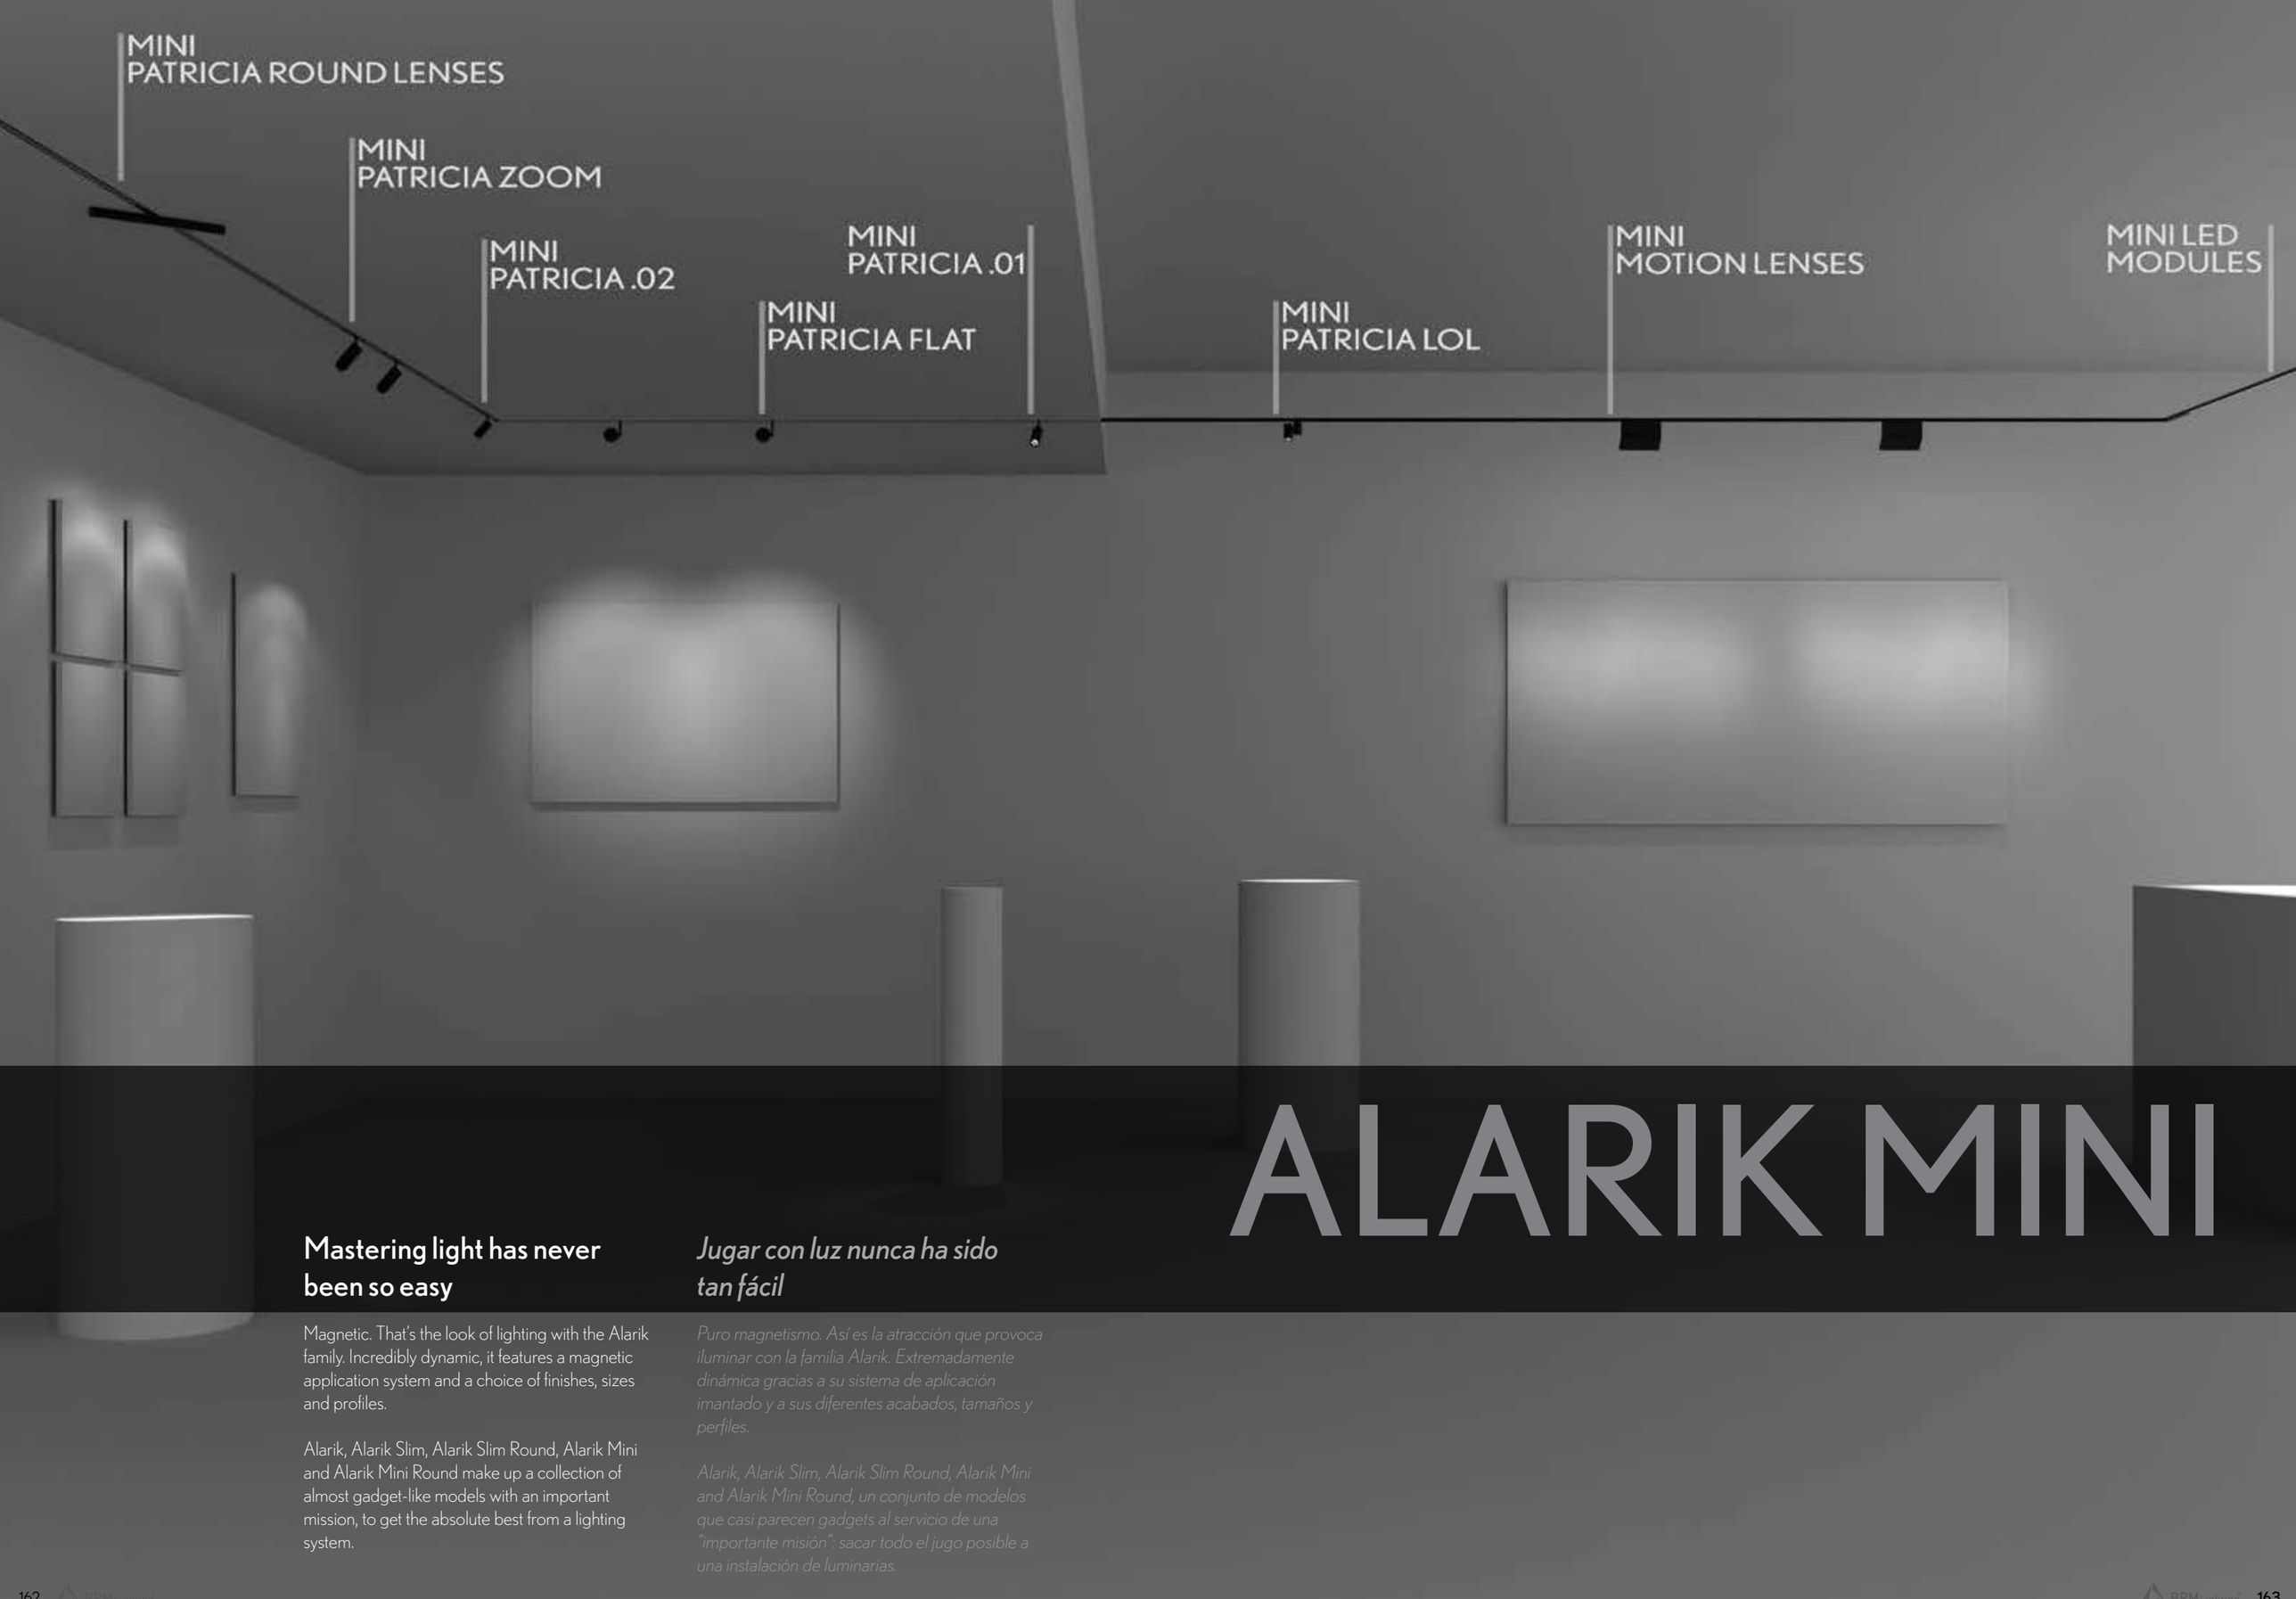

ALARIK MINI

Mastering light has never been so easy

Magnetic. That's the look of lighting with the Alarik family. Incredibly dynamic, it features a magnetic application system and a choice of finishes, sizes and profiles.

Alarik, Alarik Slim, Alarik Slim Round, Alarik Mini and Alarik Mini Round make up a collection of almost gadget-like models with an important mission, to get the absolute best from a lighting system.

Jugar con luz nunca ha sido tan fácil

Puro magnetismo. Así es la atracción que provoca iluminar con la familia Alarik. Extremadamente dinámica gracias a su sistema de aplicación imantado y a sus diferentes acabados, tamaños y perfiles.

Alarik, Alarik Slim, Alarik Slim Round, Alarik Mini and Alarik Mini Round, un conjunto de modelos que casi parecen gadgets al servicio de una "importante misión": sacar todo el jugo posible a una instalación de luminarias.

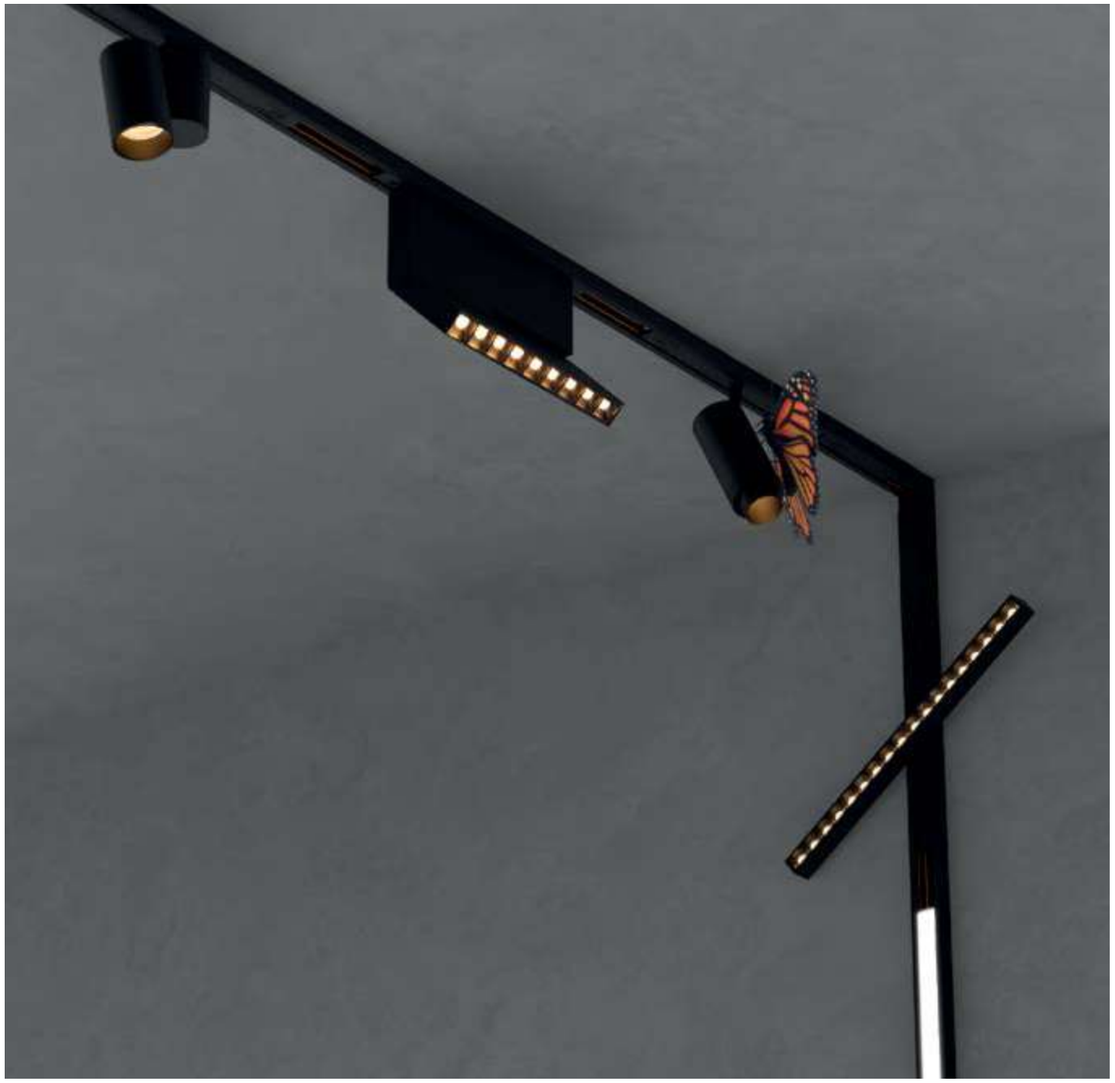

FINISHES

● COLORS

DIMENSIONS

● LENGTHS

PER METER

COMPONENTS

MINI PATRICIA
MINI PATRICIA LOL
MINI PATRICIA ZOOM
MINI MOTION LENSES
MINI LENSES
MINI LED MODULES
MINI PATRICIA FLAT
MINI PATRICIA ROUND LENSES

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

-

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.SR
Surface mounting kit

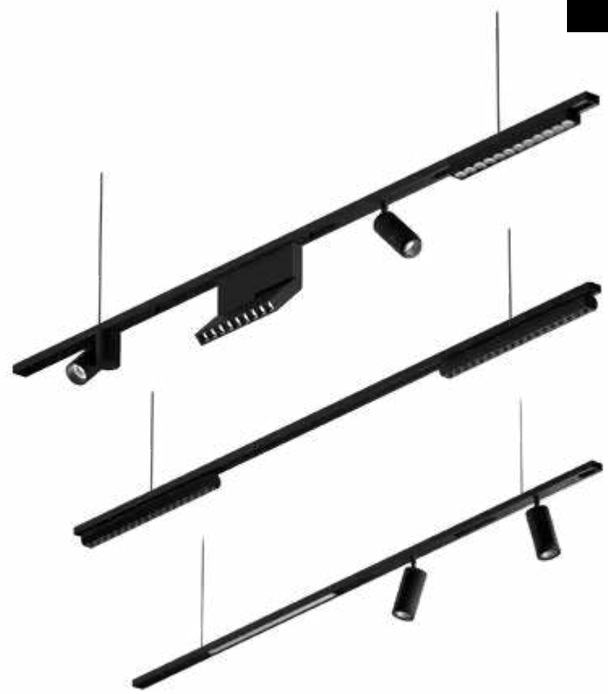

MAGNET

ON DEMAND
Custom dimensions

new

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS

ALUMINIUM | 0° | 0° | CRI ≥90 | IK06 | IP20 | LIFE 50000H | DIM OPTIONAL | 48V. REMOTE | INDOOR | 220-240 V 50-60 Hz | CE

ALARIK
MINI

REF 210006.PN | 210006.SR

.PN
PENDANT

·210006 ALARIK MINI | PN
Pag. 164

.SR
SURFACE

·210006ALARIK MINI | SR
Pag. 164

.TR
TRIMLESS

·210006 ALARIK MINI | TR
Pag. 616



ALARIK MINI		DIMEN-SION ⬟	FINISH ●	SKETCH
	210006	.01 1m	●	

Reference order | 210006.XX | .SR .PN | .XX

48V TRANSFORMER	DIMENSION ⬟	WATT
DR48	.01	75
	.02	120
	.03	200

Reference order | DR48.XX

POWER FEEDER	REF.	FINISH ●	SKETCH
	ACC210006.CA	.BK-BK .WH-WH	

Reference order | ACC210006.CA.XX

MINI PATRICIA	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450001	.01	●	.15 .24 .30	.ST	.9	.27	519	3	48	-	
							.30	557				
							.40	583				
	450001	.02	●	.15 .24 .30	.ST	.9	.27	1173	6	48	-	
							.30	1181				
							.40	1207				

Reference order | 450001.XX.XX.XX.ST.9.XX.XX

MINI PATRICIA LOL	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450002	.01	●	.15 .24 .36	.ST	.9	.27	576	6	48	-	
							.30	607				
							.40	695				

Reference order | 450002.01.XX.XX.ST.9.XX.XX

MINI PATRICIA ZOOM	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450003	.01	●	.15-40	.ST	.9	.27	519	6	48	-	
							.30	557				
							.40	583				

Reference order | 450003.01.XX.XX.ST.9.XX.XX

MINI PATRICIA FLAT	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450007	.01	●	.15 .30 .36	.ST	.9	.27	548	6	48	-	
							.30	588				
							.40	616				

Reference order | 450007.01.XX.XX.ST.9.XX.XX

MINI PATRICIA ROUND LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450008	.01	●	.30 .36 .60	.ST	.9	.27	981	9	48	-	
							.30	1017				
							.40	1080				

Reference order | 450008.01.XX.XX.ST.9.XX.XX

.SR

.PN

PENDANT | SURFACE

- Select finishes

.WH-WH .BK-BK

ALARIK
MINI

REF 210006.PN | 210006.SR

PHOTOMETRY

MINI PATRICIA

15º 24º 30º

MINI PATRICIA LOL

15º 24º 36º

MINI PATRICIA FLAT | LENSES

15º 30º 36º

MINI PATRICIA ZOOM

15º 40º

MINI PATRICIA ROUND LENSES

30º 36º 60º

MINI LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450005	.01	●	.23 .28 .36	.ST	.9	.27	538	9	48	-	
							.30	571				
							.40	656				

Reference order | 450005.01.XX.XX.ST.9.XX.XX

MINI MOTION LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450004	.01	●	.23 .28 .36	.ST	.9	.27	547	9	48	-	
							.30	570				
							.40	634				

Reference order | 450004.01.XX.XX.ST.9.XX.XX

MINI LED MODULES	REF.	DIMEN-SION ⬟	FINISH ●	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450006	.01	●	.OP	.ST	.9	.27	678	6	48	-	
							.30	688				
							.40	720				
	450006	.02	●	.OP	.ST	.9	.27	1256	12	48	-	
							.30	1274				
							.40	1340				
	450006	.03	●	.OP	.ST	.9	.27	1856	24	48	-	
							.30	1904				
							.40	2024				

Reference order | 450006.XX.XX.XX.ST.9.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF21	●

Reference order | TF21 | .SR .PN | .XX

SUSPENSION KIT	REF.
	ACC210006.SC

Reference order | ACC210006.SC

JOINTS & CONNECTORS

LINEAR JOINT	ANGLE JOINT	CROSS JOINT	T-JOINT	WALL-CEILING JOINT		FINISH ●
						.BK .WH
UR21	UL21	UC21	UT21	UV21	ACC210006.UP	

Reference order | XX.XX

BOXES (.PN) Not-included, please select:

CONNECTION BOX FOR ELECTRIC CONVERTER	ELECTRIC CONVERTER BOX		FINISH
			●
CB09.12	CB06.40	CB08.38	

Reference order | XXXX.XX

● Select finishes

.WH-WH .BK-BK

ALARIK
MINI

REF 210006.PN | 210006.SR

PHOTOMETRY
MINI LENSES

23º 28º 60º

PHOTOMETRY
MINI LED MODULES

OPAL

PROFILE



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS

PER METER

COMPONENTS

MINI PATRICIA
MINI PATRICIA LOL
MINI PATRICIA ZOOM
MINI MOTION LENSES
MINI LENSES
MINI LED MODULES
MINI PATRICIA FLAT
MINI PATRICIA ROUND LENSES

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

-

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

new

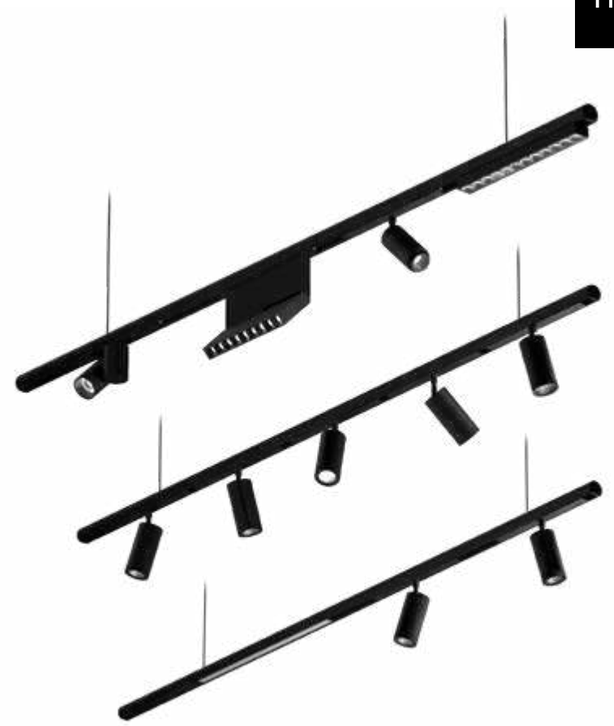

MAGNET

ON DEMAND
Custom dimensions

.PN

PENDANT

INSTALLATIONS



ALARIK
MINI ROUND

REF 210004.PN

.PN
PENDANT

·210004 ALARIK MINI ROUND | PN
Pag. 170

ALARIK MINI ROUND	REF.	DIMEN-SION ⬟	FINISH ●	SKETCH
	210004	.01 1m.	●	

Reference order | 210004.XX.PN.XX

48V TRANSFORMER	DIMENSION ⬟	WATT
DR48	.01	75
	.02	120
	.03	200

Reference order | DR48.XX

POWER FEEDER	REF.	FINISH ●	SKETCH
	ACC210004.CA	.BK-BK .WH-WH	

Reference order | ACC210004.CA.XX

MINI PATRICIA	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450001	.01	●	.15 .30 .36	.ST	.9	.27	576	3	48	-	
							.30	607				
							.40	695				
	450001	.02	●	.15 .24 .36	.ST	.9	.27	1173	8	48	-	
							.30	1181				
							.40	1207				

Reference order | 450001.XX.XX.XX.ST.9.XX.XX

MINI PATRICIA LOL	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450002	.01	●	.36	.ST	.9	.27	576	6	48	-	
							.30	607				
							.40	695				

Reference order | 450002.01.XX.XX.ST.9.XX.XX

MINI PATRICIA ZOOM	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450003	.01	●	.15-40	.ST	.9	.27	576	6	48	-	
							.30	607				
							.40	695				

Reference order | 450003.01.XX.XX.ST.9.XX.XX

MINI PATRICIA FLAT	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450007	.01	●	.15 .30 .36	.ST	.9	.27	558	5	48	-	
							.30	560				
							.40	604				

Reference order | 450007.01.XX.XX.ST.9.XX.XX

MINI PATRICIA ROUND LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450008	.01	●	.30 .36 .60	.ST	.9	.27	558	9	48	-	
							.30	560				
							.40	604				

Reference order | 450008.01.XX.XX.ST.9.XX.XX

● Select finishes

ALARIK
MINI ROUND

REF 210004.PN

PHOTOMETRY

MINI PATRICIA

MINI PATRICIA LOL

MINI PATRICIA FLAT

MINI PATRICIA ZOOM



MINI PATRICIA ROUND LENSES

MINI LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450005	.01	●	.23 .28 .36	.ST	.9	.27	538	9	48	-	
							.30	571				
							.40	656				

Reference order | 450005.01.XX.XX.ST.9.XX.XX

MINI MOTION LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450004	.01	●	.23 .28 .36	.ST	.9	.27	547	9	48	-	
							.30	570				
							.40	634				

Reference order | 450004.01.XX.XX.ST.9.XX.XX

MINI LED MODULES	REF.	DIMEN-SION ⬟	FINISH ●	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450006	.01	●	.OP	.ST	.9	.27	678	6	48	-	
							.30	688				
							.40	720				
	450006	.02	●	.OP	.ST	.9	.27	1256	12	48	-	
							.30	1274				
							.40	1340				
	450006	.03	●	.OP	.ST	.9	.27	1856	24	48	-	
							.30	1904				
							.40	2024				

Reference order | 450006.XX.XX.XX.ST.9.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF22	●

Reference order | TF22.PN.XX

SUSPENSION KIT	REF.
	ACC210004.SC

Reference order | ACC210004.SC

JOINTS & CONNECTORS

LINEAR JOINT	FINISH ●
	.BK .WH
ACC210004.UL	

Reference order | ACC210004.UL

BOXES (.PN) Not-included, please select:

CONNECTION BOX FOR ELECTRIC CONVERTER	ELECTRIC CONVERTER BOX		FINISH
			●
CB09.12	CB06.40	CB08.38	

Reference order | XXXX.XX

● Select finishes

.WH-WH .BK-BK

ALARIK
MINI ROUND

REF 210004.PN

PHOTOMETRY

MINI LENSES

23º 28º 60º

PHOTOMETRY

MINI LED MODULES



OPAL

PROFILE

Mastering light has never been so easy

It's playtime! Lighting design with Alarik family is an exercise of creativity. Freedom, functionality, uniqueness... In short, unbridled flexibility and total control over the final result.

Jugar con luz nunca ha sido tan fácil

¡Que empiece el juego! Iluminar con la familia Alarik es lo más parecido a un ejercicio de ingenio. Libertad, funcionalidad, singularidad... en definitiva, diseño sin ataduras y siempre con el control absoluto del resultado a obtener.

ALARIK SLIM

FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS

PER METER

COMPONENTS

SLIM PATRICIA
SLIM PATRICIA ZOOM
SLIM LED BALL
SLIM TUBE
SLIM WALL WASHER
SLIM LENSES
SLIM MOTION LENSES
SLIM LED MODULES

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.SR
Surface mounting kit

new

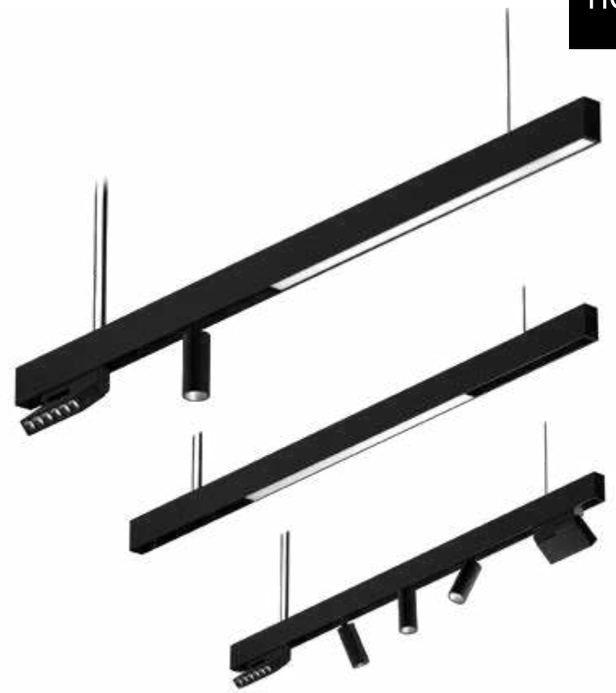

MAGNET

ON DEMAND
Custom dimensions

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS



ALARIK
SLIM

REF 20224.PN | 20224.SR

.PN
PENDANT

·20224 ALARIK SLIM | PN
Pag. 178

.SR
SURFACE

·20224 ALARIK SLIM | SR
Pag. 178

.RF
RECESSED FRAME

·20224 ALARIK SLIM | RF
Pag. 428

.TR
TRIMLESS

·20224 ALARIK SLIM | TR
Pag. 622

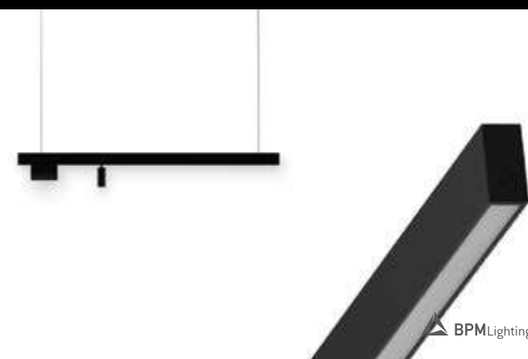

ALARIK SLIM	REF.	DIMEN-SION ⬟	FINISH ●	SKETCH
	20224	**.01** 1 m	●	

Reference order | 20224.XX ⬟ | .SR ● | .PN ■ | .XX ▼

48V TRANSFORMER	DIMENSION ⬟	WATT
DR48	**.01**	75
	.02	120
	.03	200

Reference order | DR48.XX ⬟

INTEGRATED POWER	REF.	WATT
	10246.DR (404x43x22mm)	200W

Reference order | 10246.DR

SLIM PATRICIA	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11544	**.01**	●	**.15 .38 .60**	.ST	.9	.27	576	8	48	**.DA .D1**	
							.30	607				
							.40	695				
	11544	**.02**	●	**.15 .38 .60**	.ST	.9	.27	1173	15	48	**.DA .D1**	
							.30	1181				
							.40	1207				

Reference order | 11544.XX.XX.XX.ST.9.XX.XX ⬟ ● ■ ▼

SLIM PATRICIA ZOOM	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11546	**.01**	●	**.15-36 .36-60**	.ST	.9	.27	2038	25	48	**.DA .D1**	
							.30	2254				
							.40	2320				

Reference order | 11546.01.XX.XX.ST.9.XX.XX ⬟ ● ■ ▼

SLIM LED BALL	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11551	**.01**	●	**.37**	.ST	.9	.27	355	8	48	**.DA .D1**	
							.30	383				
							.40	396				

Reference order | 11551.01.XX.XX.ST.9.XX.XX ⬟ ● ■ ▼

SLIM LED TUBE 20	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11553	**.01**	●	**.20 .40**	.ST	.9	.27	174	3	48	**.DA .D1**	
							.30	187				
							.40	212				

Reference order | 11553.01.XX.XX.ST.9.XX.XX ⬟ ● ■ ▼

SLIM LED TUBE 40	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11552	**.01**	●	**.20 .40**	.ST	.9	.27	954	14	48	**.DA .D1**	
							.30	991				
							.40	1067				

Reference order | 11552.01.XX.XX.ST.9.XX.XX ⬟ ● ■ ▼

SLIM WALL WASHER	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11550	**.01**	**.BK-BK**	-	.ST	.9	.27	882	15	48	**.DA .D1**	
							.30	1013				
							.40	1107				

Reference order | 11550.01.XX.XX.ST.9.XX.XX ⬟ ● ■ ▼

SLIM LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11548	**.01**	**.BK-BK**	**.15 .38**	.ST	.9	.27	660	8	48	**.DA .D1**	
							.30	750				
							.40	827				
	11548	**.02**	**.BK-BK**	**.15 .38**	.ST	.9	.27	1320	15	48	**.DA .D1**	
							.30	1511				
							.40	1654				

Reference order | 11548.XX.XX.XX.ST.9.XX.XX ⬟ ● ■ ▼

.SR

.PN

PENDANT | SURFACE

- Select finishes

.WH-WH .BK-BK

ALUMINIUM · 0° · 0° · CRI ≥90 · IK06 · IP20 · LIFE 50000H · DIM OPTIONAL · 48V. REMOTE · INDOOR · 220-240 V 50-60 Hz · CE

ALARIK
SLIM

REF 20224.PN | 20224.SR

PHOTOMETRY

SLIM PATRICIA

15º 36º 38º 60º

PHOTOMETRY

SLIM LED BALL SLIM WALL WASHER

37º

PHOTOMETRY

SLIM TUBE | SLIM LENSES

20º 40º

PROFILE



SLIM MOTION LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11547	.01	.BK-BK	.15 .38	.ST	.9	.27	660	8	48	.DA .D1	
							.30	750				
							.40	827				

Reference order | 11547.01.XX.XX.ST.9.XX.XX

SLIM LED MODULES	REF.	DIMEN-SION ⬟	FINISH ●	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11549	.01	.BK-BK	.OP	.ST	.9	.27	558	9	48	.DA .D1	
							.30	560				
							.40	604				
	11549	.02	.BK-BK	.OP	.ST	.9	.27	1115	18	48	.DA .D1	
							.30	1120				
							.40	1208				
	11549	.03	.BK-BK	.OP	.ST	.9	.27	1670	24	48	.DA .D1	
							.30	1680				
							.40	1812				

Reference order | 11549.XX.XX.XX.ST.9.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF19	●

Reference order | TF19 | .SR .PN | .XX

SUSPENSION KIT	REF.
	ACC20224.SC

Reference order | ACC20224.SC

SUSPENSION KIT WITH DRIVER BOX	REF.
	ACC20224.PKDB

Reference order | ACC20224.PKDB

JOINTS & CONNECTORS

LINEAR JOINT CONNECTOR	FINISH ●	ANGLE JOINT CONNECTOR	FINISH ●
	.BK-BK		.BK-BK

ACC20224.UR.XX | ACC20224.UL.XX

POWER FEEDER UNIT	FINISH ●
	.BK-BK

ACC20224.CA.XX

LINEAR JOINT	ANGLE JOINT	WALL-CEILING JOINT
		

UR19.BK-BK | UL19.BK-BK | UV19.BK-BK

CURVE JOINT KIT *1	REF.	DIMEN-SION ⬟	DEGREE ■	FINISH ●	SKETCH
	ACC.20224	.01	.45 45º	.BK-BK .WH-WH	
		.02			
		.03			

Reference order | ACC20224.XX.45.XX

CURVE JOINT KIT *1	REF.	DIMEN-SION ⬟	DEGREE ■	FINISH ●	SKETCH
	ACC.20224	.01	.90 90º	.BK-BK .WH-WH	
		.02			
		.03			

Reference order | ACC20224.XX.90.XX

*1 LED components can not be instaled in curve joints. Los componentes LED no se pueden instalar en las uniones curvas.

● Select finishes

.WH-WH .BK-BK

ALARIK
SLIM

REF 20224.PN | 20224.SR

PHOTOMETRY

SLIM MOTIONLENSES

15º 38º

PHOTOMETRY

SLIM LED MODULES

OPAL

FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS

PER METER

COMPONENTS

SLIM PATRICIA
SLIM PATRICIA ZOOM
SLIM LED BALL
SLIM TUBE
SLIM WALL WASHER
SLIM LENSES
SLIM MOTION LENSES
SLIM LED MODULES

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.SR
Surface mounting kit

new

MAGNET

ON DEMAND
Custom dimensions

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS



ALARIK
SLIM ROUND

REF 210019.PN | 210019.SR

.PN
PENDANT

·210019 ALARIK SLIM ROUND | PN
Pag. 184

.SR
SURFACE

·210019 ALARIK SLIM ROUND | SR
Pag. 184

ALARIK SLIM ROUND	REF.	DIMENSION ⬟	FINISH	SKETCH
	210019	.01 1 m	●	

48V TRANSFORMER	DIMENSION ⬟	WATT
DR48	.01	75
	.02	120
	.03	200

Reference order | 210019.XX ⬟ | .SR ■ | .PN ▼ | .XX ●

Reference order | DR48.XX ⬟

SLIM PATRICIA	REF.	DIMENSION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11544	.01	●	.15 .38 .60	.ST	.9	.27	576	8	48	.DA .D1	
							.30	607				
							.40	695				
	11544	.02	●	.15 .38 .60	.ST	.9	.27	1173	15	48	.DA .D1	
							.30	1181				
							.40	1207				

Reference order | 11544.XX.XX.XX.ST.9.XX.XX ⬟ ● ■ ▼

SLIM PATRICIA ZOOM	REF.	DIMENSION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11546	.01	●	.15-36 .36-60	.ST	.9	.27	2038	25	48	.DA .D1	
							.30	2254				
							.40	2320				

Reference order | 11546.01.XX.XX.ST.9.XX.XX ⬟ ● ■ ▼

SLIM LED BALL	REF.	DIMENSION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11551	.01	●	.37	.ST	.9	.27	355	8	48	.DA .D1	
							.30	383				
							.40	396				

Reference order | 11551.01.XX.XX.ST.9.XX.XX ⬟ ● ■ ▼

SLIM LED TUBE 20	REF.	DIMENSION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11553	.01	●	.20 .40	.ST	.9	.27	174	3	48	.DA .D1	
							.30	187				
							.40	212				

Reference order | 11553.01.XX.XX.ST.9.XX.XX ⬟ ● ■ ▼

SLIM LED TUBE 40	REF.	DIMENSION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11552	.01	●	.20 .40	.ST	.9	.27	954	14	48	.DA .D1	
							.30	991				
							.40	1067				

Reference order | 11552.01.XX.XX.ST.9.XX.XX ⬟ ● ■ ▼

SLIM WALL WASHER	REF.	DIMENSION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11550	.01	.BK-BK	-	.ST	.9	.27	882	15	48	.DA .D1	
							.30	1013				
							.40	1107				

Reference order | 11550.01.XX.XX.ST.9.XX.XX ⬟ ● ■ ▼

SLIM LENSES	REF.	DIMENSION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11548	.06	.BK-BK	.15 .38	.ST	.9	.27	660	8	48	.DA .D1	
							.30	750				
							.40	827				
	11548	.12	.BK-BK	.15 .38	.ST	.9	.27	1320	15	48	.DA .D1	
							.30	1511				
							.40	1654				

Reference order | 11548.XX.XX.XX.ST.9.XX.XX ⬟ ● ■ ▼

.SR

.PN

PENDANT | SURFACE

- Select finishes

.WH-WH .BK-BK

ALARIK
SLIM ROUND

REF 210019.PN | 210019.SR

PHOTOMETRY

SLIM PATRICIA

15º 36º 38º 60º

PHOTOMETRY

SLIM LED BALL SLIM WALL WASHER



38º

PHOTOMETRY

SLIM TUBE | SLIM LENSES



15º 38º

PROFILE



SLIM MOTION LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11547	.01	.BK-BK	.15 .38	.ST	.9	.27	660	8	48	.DA .D1	
							.30	750				
							.40	827				

Reference order | 11547.01.XX.XX.ST.9.XX.XX

SLIM LED MODULES	REF.	DIMEN-SION ⬟	FINISH ●	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11549	.01	.BK-BK	.OP	.ST	.9	.27	558	9	48	.DA .D1	
							.30	560				
							.40	604				
	11549	.02	.BK-BK	.OP	.ST	.9	.27	1115	18	48	.DA .D1	
							.30	1120				
							.40	1208				
	11549	.03	.BK-BK	.OP	.ST	.9	.27	1670	24	48	.DA .D1	
							.30	1680				
							.40	1812				

Reference order | 11549.XX.XX.XX.ST.9.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF20	●

Reference order | TF20 | .SR .PN | .XX

SUSPENSION KIT	REF.
	ACC210019.SC

Reference order | ACC210019.SC

SUSPENSION KIT WITH DRIVER BOX	REF.
	ACC210019.PKDB

Reference order | ACC210019.PKDB

JOINTS & CONNECTORS

LINEAR JOINT CONNECTOR	FINISH ●	ANGLE JOINT CONNECTOR	FINISH ●
	.BK-BK		.BK-BK

ACC210019.UR.XX | ACC210019.UL.XX

POWER FEEDER UNIT	FINISH ●
	.BK-BK

ACC210019.CA.XX

LINEAR JOINT	ANGLE JOINT	WALL-CEILING JOINT
	X	X

UR20

.SR

.PN

PENDANT | SURFACE

- Select finishes

.WH-WH .BK-BK

ALARIK
SLIM ROUND

REF 210019.PN | 210019.SR

PHOTOMETRY

SLIM MOTIONLENSES

15º 38º

PHOTOMETRY

SLIM LED MODULES

OPAL

JOINTS CONNECTORS

LINEAR JOINT CONNECTOR

FLEXIBLE JOINT CONNECTOR

POWER FEEDER UNIT

FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS

PER METER

COMPONENTS

PATRICIA
LED MODULES
LENSES

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.SR
Surface mounting kit

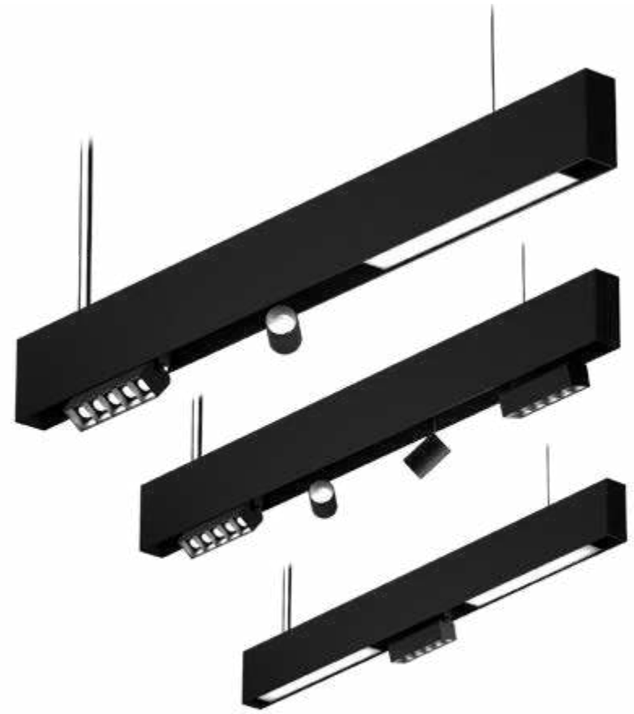

MAGNET

ON DEMAND
Custom dimensions

ALARIK

REF 10225.PN | 10225.SR

ALUMINIUM · 0° · 0° · CRI ≥90 · IK06 · IP20 · LIFE 50000H · DIM OPTIONAL · 48V REMOTE · INDOOR · 220-240 V 50-60 Hz · CE

INSTALLATIONS

.PN
PENDANT

·10225 ALARIK | PN
Pag. 190

.SR
SURFACE

·10225 ALARIK | SR
Pag. 190

.TR
TRIMLESS

·10225 ALARIK | TR
Pag. 628



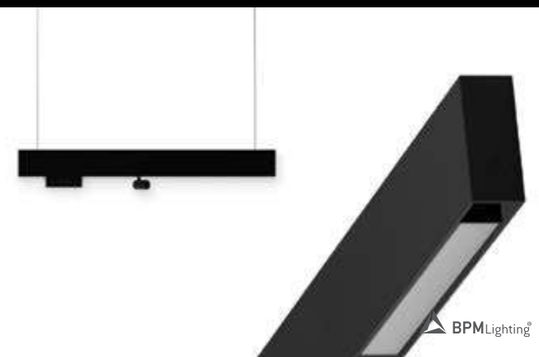

ALARIK	REF.	DIMEN-SION ⬟	FINISH ●	SKETCH
	10225	**.01** 1m	●	

48V TRANSFORMER	DIMENSION ⬟	WATT
DR48	**.01**	75
	.02	120
	.03	200

Reference order | 10225.XX | .SR | .PN | .XX

Reference order | DR48.XX

PATRICIA S	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	20146	**.01**	●	**.15** **.24** **.38**	**.ST**	**.9**	**.27**	576	8	48	**.DA**	
							.30	607				
							.40	695				

Reference order | 20146.01.XX.XX.ST.9.XX.XX

PATRICIA M	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	20193	**.01**	●	**.15** **.24** **.38**	**.ST**	**.9**	**.27**	1173	13	48	**.DA**	
							.30	1181				
							.40	1207				

Reference order | 20193.01.XX.XX.ST.9.XX.XX

LED MODULES	REF.	DIMEN-SION ⬟	FINISH ●	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11542	**.01**	**.BK-BK**	**.OP**	**.ST**	**.9**	**.27**	765	6	48	**.DA**	
							.30	795				
							.40	825				
	11542	**.02**	**.BK-BK**	**.OP**	**.ST**	**.9**	**.27**	1530	12	48	**.DA**	
							.30	1590				
							.40	1650				
	11542	**.03**	**.BK-BK**	**.OP**	**.ST**	**.9**	**.27**	2295	18	48	**.DA**	
							.30	2385				
							.40	2475				

Reference order | 11542.XX.XX.XX.ST.9.XX.XX

LENSES	REF.	DIMEN-SION ⬟	SHAPE ◗	FINISH ●	OPTIC OP. ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11534	**.05F**	**.RD** **.SQ**	**.BK-BK**	**.20** **.40** **.60**	**.ST**	**.9**	**.27**	660	10	48	**.DA**	
								.30	750				
								.40	827				
	11534	**.05**	**.RD** **.SQ**	**.BK-BK**	**.20** **.40** **.60**	**.ST**	**.9**	**.27**	660	10	48	**.DA**	
								.30	750				
								.40	827				

ROUND .RD
26x29,3 mm
Int Ø14,5 - Ext. Ø23 mm

SQUARE .SQ
26x29,3 mm
Ø14,5 mm

Reference order | 11534.XX.XX.XX.XX.ST.9.XX.XX

- Select finishes

.WH-WH .BK-BK

ALARIK

REF 10225.PN | 10225.SR

PHOTOMETRY
PATRICIA

15º 24º 38º

PHOTOMETRY
LENSES

20º 40º 60º

PHOTOMETRY
LED MODULES


OPAL MICROPRISMATIC

PROFILE



COMPONENTS

COVERT KIT	REF.	FINISH
	TF18	●

Reference order | TF18 | .SR / .PN | ● .XX

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMEN-SION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
				X	●
UR18	UL18	UT18	UC18	X	

***** Each angle joint requires an additional driver to that of the luminaire. *Cada esquina requiere de un driver adicional al de la luminaria.*

Reference order | XX18 | .SR / .PN | ● .XX

BOXES (.PN) Not-included, please select:

CONNECTION BOX FOR REMOTE DRIVER	DRIVER BOX		FINISH
			●
CB09.12	CB06.40	CB08.38	

Reference order | XXXX.XX

● Select finishes

.WH-WH .BK-BK

ALARIK

REF 10225.PN | 10225.SR

INCLUDED (.SR)



SR MOUNTING KIT

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



FINISHES

● COLORS

DIMENSIONS

● LENGTHS

PER METER

COMPONENTS

LED MODULES
LENSES
MINI TUBE
MINI TUBE STICK

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m (each 2m)
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
.SR
Surface mounting kit

ON DEMAND

Special Shapes
Emergency Lighting*
Motion Detection
Custom dimensions
Special RAL Color
Tunable White
Up Light

* Delivered separately (not installed in luminaire).

.SR
.PN
PENDANT | SURFACE

MODULIGHT

REF 10210.PN | 10210.SR

ALUMINIUM PC · 0° · 0° · CRI ≥90 · IK06 · IP40 · L80 50000H · DIM OPTIONAL · INTEGRATED · INDOOR · 220-240 V 50-60 Hz · CE

INSTALLATIONS

.PN
PENDANT
·10210 MODULIGHT | PN
Pag. 196

.SR
SURFACE
·10210 MODULIGHT | SR
Pag. 196

.RF
RECESSED FRAME
·10210 MODULIGHT | RF
Pag. 434

.TR
TRIMLESS
·10210 MODULIGHT | TR
Pag. 634



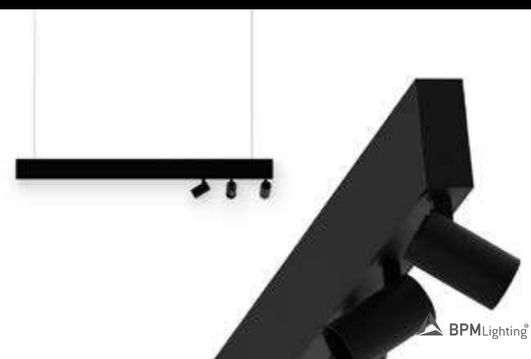

MODULIGHT	REF.	DIMEN-SION ⬟	FINISH ●	SKETCH
	10210	**.01** 1m	●	

Reference order | 10210.XX | .SR .PN | .XX

DRIVER	DIMENSION*1 ⬟		DIMM ▼
DR10210	**.01**	0 - 15 W	**.DA .PU .D1**
	.02	16 - 30 W	
	.03	31 - 65 W	
	.04	66 - 90 W	

Reference order | DR10210.XX.XX

MINI TUBE	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11526	**.01**	**.BK-BK .WH-WH**	**.15 .24 .38**	**.ST**	**.9**	**.27**	348	8	700	
							.30	362			
							.40	421			

Reference order | 11526.01.XX.XX.ST9.XX

MINI TUBE STICK	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	**11538**	**.01**	**.BK-BK .WH-WH**	**.15 .24 .38**	**.ST**	**.9**	**.27**	348	8	700	
							.30	362			
							.40	421			

Reference order | 11538.01.XX.XX.ST9.XX

Modular system that requires a technical drawing

*1 Driver power must be at least 15% higher than the sum of the power of selected LED modules. *La potencia del driver deber ser por lo menos un 15% mayor que la suma de la potencia de los modulos LED elegidos.*

LENSES	REF.	DIMEN-SIONS ⬟	SHAPE ◗	FINISH ●	OPTIC OPTIONS ■	POW-ER	CRI	K	LUMEN	WATT	mA	SKETCH
	11525	**.01** 29mm.	**.RD .SQ**	●	**.20 .40 .60**	**.ST**	**.9**	**.27**	142	2	700	
								.30	161			
								.40	212			
	11525	**.03** 80mm.	**.RD .SQ**	●	**.20 .40 .60**	**..ST**	**.9**	**.27**	426	6	700	
								.30	483			
								.40	636			
	11525	**.05** 133mm.	**.RD .SQ**	●	**.20 .40 .60**	**.ST**	**.9**	**.27**	710	10	700	
								.30	805			
								.40	1060			
	11525	**.10** 263mm.	**.RD .SQ**	●	**.20 .40 .60**	**.ST**	**.9**	**.27**	1420	20	700	
								.30	1611			
								.40	2120			

Reference order | 11525.XX.XX.XX.XX.ST9.XX

COVERT	REF.	FINISH ●
	ACC10210.01	**.WH-WH .BK.BK**

Reference order | ACC10210.01.XX

ROUND .RD
26x29,3 mm
Int Ø14,5 - Ext. Ø23 mm



SQUARE .SQ
26x29,3 mm
Ø14,5 mm



● Select lens finishes

MODULIGHT

REF 10210.PN | 10210.SR

PHOTOMETRY

MINI TUBE

15º 24º 38º

PHOTOMETRY

MINI LENSES

20º 40º 60º

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



LED MODULES	REF.	DIMEN-SION ⬟	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11524	**.01** 281mm.	**.OP .MP**	**.HI**	**.9**	**.27**	953	12	700	
						.30	972			
						.40	1141			
	11524	**.02** 562mm.	**.OP .MP**	**.HI**	**.9**	**.27**	1906	24	700	
						.30	1944			
						.40	2282			
	11524	**.03** 843mm.	**.OP .MP**	**.HI**	**.9**	**.27**	2859	36	700	
						.30	2916			
						.40	3423			
	11524	**.04** 1124mm.	**.OP .MP**	**.HI**	**.9**	**.27**	3812	48	700	
						.30	3888			
						.40	4564			
	11524	**.05** 1405mm.	**.OP .MP**	**.HI**	**.9**	**.27**	4765	60	700	
						.30	4860			
						.40	5705			
	11524	**.06** 1686mm.	**.OP .MP**	**.HI**	**.9**	**.27**	5718	72	700	
						.30	5832			
						.40	6846			

Reference order | 11524.XX.XX.HI.9.XX (⬟ ■)

COMPONENTS

COVERT KIT	REF.	FINISH
	TF23	●

Reference order | TF23 | .SR .PN | ●.XX

BOXES (.PN) Not-included please select:

CONNECTION BOX

CB09.12

Reference order | ● | CB09.12.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
		X	**X**		●
UR23	**UL23**	**X**	**X**	**UV23**	

Reference order | XX23 | .SR .PN | ●.XX

● Select finishes

MODULIGHT

REF 10210.PN | 10210.SR

PHOTOMETRY

LED MODULES



OPAL

MICROPRISMATIC

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



FINISHES

● COLORS

DIMENSIONS

⬟ PROFILE LENGTHS mm.

800 | 1100 | 1400 | 1700 | 2000 | 2300

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

UP-DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m (each 2m)
NON-DIM DOWN-UP: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN-UP: Cabling 1 circuits, 1 x Feed Hose 3 x 0,75mm²
Diffuser
.SR
Surface mounting kit

new

REMOTE

ON DEMAND

RGB
TW
Number switches

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS

OKKIA

REF 210007.PN | 210007.SR

.PN
PENDANT

·210007 OKKIA| PN
Pag. 202

.SR
SURFACE

·210007 OKKIA| SR
Pag. 202

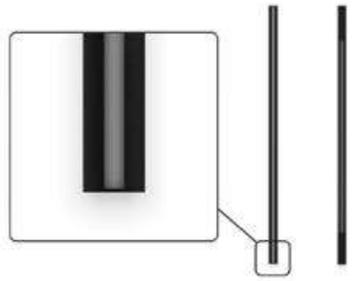

REF.	PROFILE LENGTH ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT K	UPLIGHT ▲.UP *1 | LUMEN .27	.30	.40	WATT K	DIMM ▼
210007	.03	800	●	.OP	.ST	.9	3261	3377	3474	24	263	273	347	4	.DA .PU .D1
	.04	1100					3882	4020	4136	29	385	399	508	6	
	.05	1400					5435	5628	5790	40	526	545	693	8	
	.06	1700					6483	6713	6907	48	653	677	860	10	
	.07	2000					7609	7879	8107	56	790	818	1040	12	
	.08	2300					8657	8965	9223	64	917	959	1208	14	

Reference order | 210007.XX | .SR .PN | .XX.XX.ST9.XX.XX.XX

Total length = Profile length + 20mm + 2x2mm (Cover kit)

COMPONENTS

COVERT KIT	REF.	FINISH
	TF11	●

Reference order | TF11 | .SR .PN | .XX

BOXES (.PN) Not-included, please select:

CONNECTION BOX	DRIVER BOX NON-DIMM	DRIVER BOX DIMMABLE	FINISH
			●
CB09.12	CB06.32	CB06.40	

Reference order | CB09.XX.XX

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMENSIONS ⬟	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX

● Select finishes

OKKIA

REF 210007.PN | 210007.SR

PHOTOMETRY

OPAL

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE

*1 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*

FINISHES

● EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ PROFILE LENGTHS mm.

800 | 1100 | 1400 | 1700 | 2000 | 2300

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

UP-DOWN

LUMINAIRE INCLUDES

2 x Suspension cables 3m (each 2m)
NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
Diffuser

new

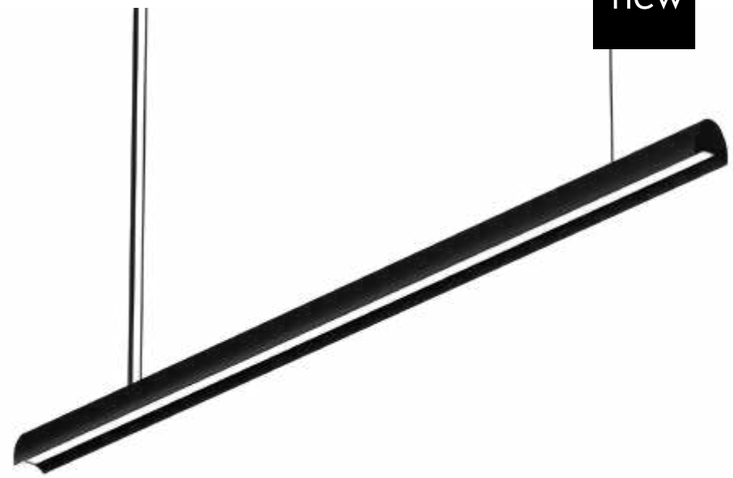

ON DEMAND

RGB
Tunable White

REMOTE

.PN
PENDANT

PENDANT

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06 | IP40 | L70 50000H | DIM OPTIONAL | | REMOTE | INDOOR | 220-240 V 50-60 Hz | CE

OKKIA PLUS

REF 210017.PN

INSTALLATIONS

.PN
PENDANT

·210017 OKKIA PLUS | PN
Pag. 206

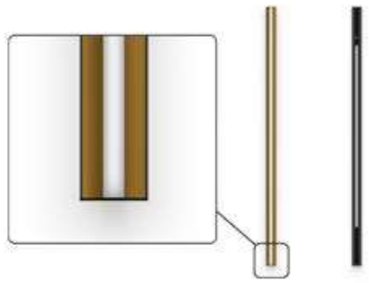

REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT*2 | LUMEN .27	.30	.40	WATT K	UPLIGHT ▲.UP *1 | LUMEN .27	.30	.40	WATT K	DIMM ▼
210017	.03	800	●	.OP	.ST	.9	3261	3377	3474	24	263	273	347	4	.DA .PU .D1
	.04	1100					3882	4020	4136	29	385	399	508	6	
	.05	1400					5435	5628	5790	40	526	545	693	8	
	.06	1700					6483	6713	6907	48	653	677	860	10	
	.07	2000					7609	7879	8107	56	790	818	1040	12	
	.08	2300					8657	8965	9223	64	917	959	1208	14	

Reference order | 210017.XX ⬟ | .SR .PN | .XX.XX ● ■ .ST.9.XX ▼ .XX.XX ▲

Total length = Profile length + 20mm + 2x2mm (Cover kit)

COMPONENTS

COVERT KIT	REF.	FINISH
	TF12	●

Reference order | TF12.PN.XX ●

BOXES (.PN) Not-included, please select:

CONNECTION BOX	DRIVER BOX NON-DIMM	DRIVER BOX DIMMABLE	FINISH
			●
CB09.12	CB09.32	CB09.40	

Reference order | CBXXXX.XX ●

OPTIONS

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

.PN

PENDANT

- Select finishes

OKKIA PLUS

REF 210017.PN

PHOTOMETRY

OPAL

INCLUDED

SC03.SA
WIRE 3M.

PROFILE



new

FINISHES

● COLORS

DIMENSIONS

⬟ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m (each 2m)
NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
NON-DIM DOWN-UP or DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
Diffuser
.SR
Surface mounting kit

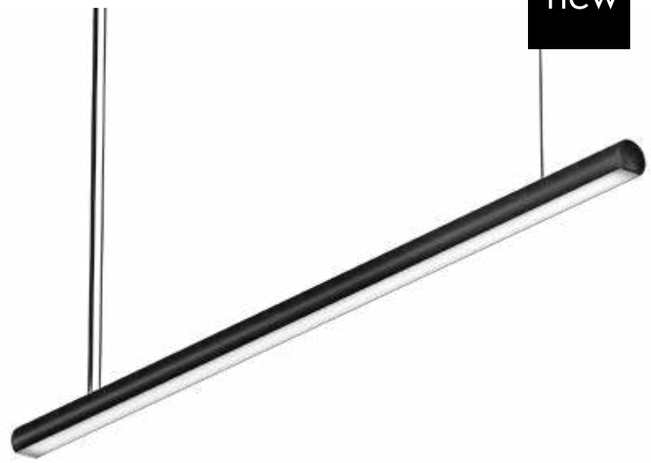

REMOTE

ON DEMAND

Emergency Lighting *
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK08
IP40 | LIFE 50000H | DIM OPTIONAL | | REMOTE
IN/OOOR | | 220-240 V 50-60 Hz | CE

LINGGO
MINI

REF 210003.PN | 210003.SR

.PN
PENDANT

·210003 LINGGO MINI | PN
Pag. 210

.SR
SURFACE

·210003 LINGGO MINI | SR
Pag. 210

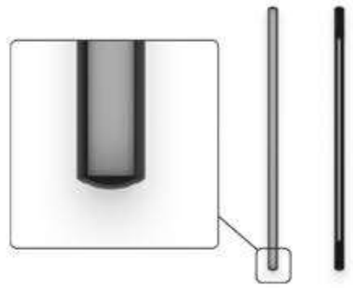

REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUS-ER ■	POWER	CRI	DOWNLIGHT *3 | LUMEN .27	.30	.40	.TW *1	WATT K	TW	UPLIGHT ▲.UP *2 | LUMEN .27	.30	.40	WATT K	DIMM ▼
210003	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	265	274	349	4	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	397	411	522	6	
	.05	1405					3825	3975	4125	9500-9850	30	64	259	548	696	8	
	.06	1686					4590	4770	4950	11400-11820	35	76	661	685	870	10	
	.07	1967					5355	5565	5775	13300-13790	41	89	793	822	1044	12	
	.08	2248					6120	6360	6600	15200-15760	47	102	925	958	1218	14	

REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUS-ER ■	POWER	CRI	DOWNLIGHT *3 | LUMEN .27	.30	.40	WATT	UPLIGHT ▲.UP *2 | LUMEN .27	.30	.40	WATT	DIMM ▼
210003	.03	843	●	.OP .MP	.HI	.9	4590	4767	4956	35	568	587	747	8	.DA .PU .D1
	.04	1124					6120	6356	6608	47	851	880	1119	13	
	.05	1405					7650	7945	8260	59	1134	1173	1492	17	
	.06	1686					9180	9534	9912	71	1417	1466	1864	21	
	.07	1967					10710	11123	11564	83	1701	1760	2237	25	
	.08	2248					12240	12712	13216	94	1984	2053	2610	30	

Reference order | 210003.XX ⬟ | .SR .PN | .XX.XX ● ■ .XX.XX.XX.9.XX ▼ .XX.XX ▲

Total length = Profile length + 20mm + 2x9mm (Cover kit)

COMPONENTS

COVERT KIT	REF.	FINISH
	TF10 2x9mm.	●

Reference order | TF10 | .SR .PN | ● | .XX

BOXES (.PN) Not-included, please select:

CONNECTION BOX	DRIVER BOX NON-DIMM	DRIVER BOX DIMMABLE	FINISH
			●
CB09.12	CB09.32	CB09.40	

Reference order | CB09.XX.XX ●

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
		X	X	X	●
UR10	UL10	X	X	X	

Reference order | UL10 | .SR .PN | ● .XX

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMEN-SION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

● Select finishes

LINGGO MINI

REF 210003.PN | 210003.SR

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700*mA.
*2 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*
*3 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

FINISHES

● COLORS

DIMENSIONS

⬟ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m (each 2m)
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): Cabling 2 circuits, 2 x Feed Hose 5 x 0,75mm²
Diffuser
.SR
Surface mounting kit

new

ON DEMAND

Emergency Lighting*
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

LINGGO

REF 210002.PN | 210002.SR

.PN
PENDANT

·210002 LINGGO | PN
Pag. 214

.SR
SURFACE

·210002 LINGGO | SR
Pag. 214

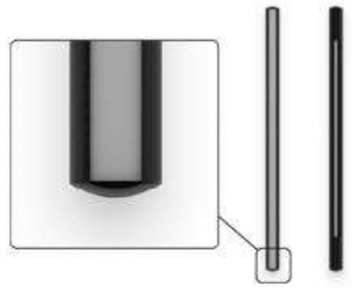

REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *4 .27	.30	.40	.TW *2	WATT K	TW	UPLIGHT .UP *3 | LUMEN .27	.30	.40	WATT K	DIMM OP. ▼
210002	.03	843	●	.OP	.ST	.9	2295	2385	2475	5700-5910	18	38	265	274	349	4	.DA *1 .PU .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	397	411	522	6	
	.05	1405					3825	3975	4125	9500-9850	30	64	259	548	696	8	
	.06	1686					4590	4770	4950	11400-11820	35	76	661	685	870	10	
	.07	1967					5355	5565	5775	13300-13790	41	89	793	822	1044	12	
	.08	2248					6120	6360	6600	15200-15760	47	102	925	958	1218	14	

REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *4 | LUMEN .27	.30	.40	WATT	UPLIGHT ▲.UP *3 | LUMEN .27	.30	.40	WATT	DIMM OP. ▼
210002	.03	843	●	.OP	.HI	.9	4590	4767	4956	35	568	587	747	8	.DA *1 .PU .D1
	.04	1124					6120	6356	6608	47	851	880	1119	13	
	.05	1405					7650	7945	8260	59	1134	1173	1492	17	
	.06	1686					9180	9534	9912	71	1417	1466	1864	21	
	.07	1967					10710	11123	11564	83	1701	1760	2237	25	
	.08	2248					12240	12712	13216	94	1984	2053	2610	30	

Reference order | 210002.XX | .SR .PN | .XX.XX.XX.9.XX.XX.XX

Total length = Profile length + 20mm + 2x12mm (Cover kit)

COMPONENTS

COVERT KIT	REF.	FINISH
	TF09 2x12mm.	●

Reference order | TF09 | .SR .PN | .XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
		X	X	X	●
UR09	UL09	X	X	X	

Reference order | UL09 | .SR .PN | .XX

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMENSIONS ⬟	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX

Not-included, please select:

CONNECTION BOX	FINISH
	●
CB09.12	

Reference order | CB09.12.XX

● Select finishes

LINGGO

REF 210002.PN | 210002.SR

PHOTOMETRY

OPAL

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



*1 DALI protocol requires remote driver. *Protocolo DALI requiere driver en remoto.*
*2 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700mA.*
*3 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*
*4 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

new

FINISHES

● COLORS

DIMENSIONS

⬟ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m (each 2m)
NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
NON-DIM DOWN-UP or DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
Diffuser
.SR
Surface mounting kit

REMOTE

ON DEMAND

Emergency Lighting *
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06
IP40 | LIFE 50000H | DIM OPTIONAL | | REMOTE
INDOOR | | 220-240 V 50-60 Hz | CE

BUBBLE

REF 210010.PN | 210010.SR

.PN
PENDANT

·210010 BUBBLE | PN
Pag. 218

.SR
SURFACE

·210010 BUBBLE | SR
Pag. 218

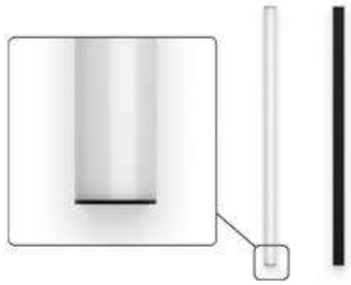

REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *1 | LUMEN .27	.30	.40	WATT K	DIMM ▼
210010	.03	843	●	.OP	.ST	.9	2295	2385	2475	18	.DA .PU .D1
	.04	1124					3060	3180	3300	24	
	.05	1405					3825	3975	4125	30	
	.06	1686					4590	4770	4950	35	
	.07	1967					5355	5565	5775	41	
	.08	2248					6120	6360	6600	47	

Reference order | 210010.XX ⬟ | .SR .PN | .XX ● .XX ■ .ST .9 .XX .XX ▼

Total length = Profile length + 20mm + 2x3mm (Cover kit)

COMPONENTS

COVERT KIT	REF.	FINISH
	TF15 2x3mm.	●

Reference order | TF15 | .SR .PN | ● .XX

BOXES (.PN) Not-included, please select:

CONNECTION BOX	DRIVER BOX NON-DIMM	DRIVER BOX DIMMABLE	FINISH
			●
CB09.12	CB09.32	CB09.40	

Reference order | CBXXXX.XX ●

JOINTS

LINEAR JOINT
UR15

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

.SR

.PN

PENDANT | SURFACE

● Select finishes

BUBBLE

REF 210010.PN | 210010.SR

PHOTOMETRY



OPAL

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



*1 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

FINISHES

● COLORS

DIMENSIONS

⬟ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Surface mounting kit

new

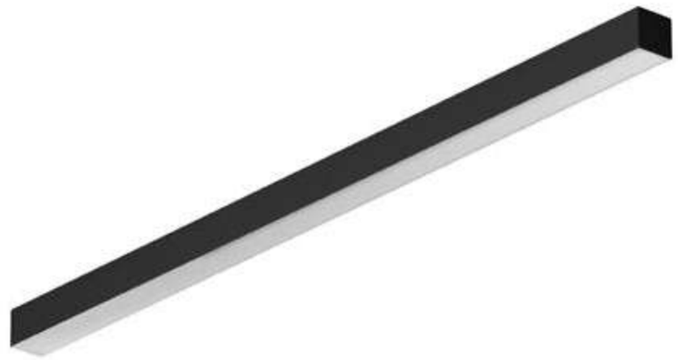

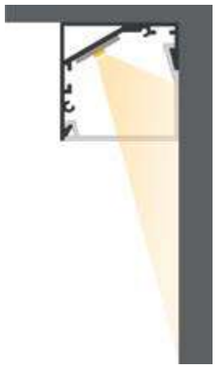

REMOTE

ON DEMAND

Emergency Lighting*
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

.SR

SURFACE

INSTALLATIONS

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06
IP40 | L70 50000H | DIM OPTIONAL | | REMOTE
INDOOR | | 220-240 V 50-60 Hz | CE

EDGE

REF 210014.SR

.SR
SURFACE

·210014 EDGE | SR
Pag. 222



REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *2 | LUMEN .27	.30	.40	.TW *1	WATT K	TW	DIMM ▼
210014	.03	843	●	.OP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	
	.05	1405					3825	3975	4125	9500-9850	30	64	
	.06	1686					4590	4770	4950	11400-11820	35	76	
	.07	1967					5355	5565	5775	13300-13790	41	89	
	.08	2248					6120	6360	6600	15200-15760	47	102	

Reference order | 210014.XX.SR.XX.XX.XX.9.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF08 2x2mm.	●

Reference order | TF08.SR.XX

JOINTS

LINEAR JOINT
UR08

Total length = Profile length + 20mm + 2x2mm (Cover kit)

● Select finishes

.WH-WH .BK-BK

EDGE

REF 210014.SR

PHOTOMETRY

INCLUDED

X 2

SR INSTALATION KIT

PROFILE



FINISHES

● COLORS

DIMENSIONS

⬟ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m (each 2m)
NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
NON-DIM DOWN-UP or DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
Diffuser
.SR
Surface mounting kit

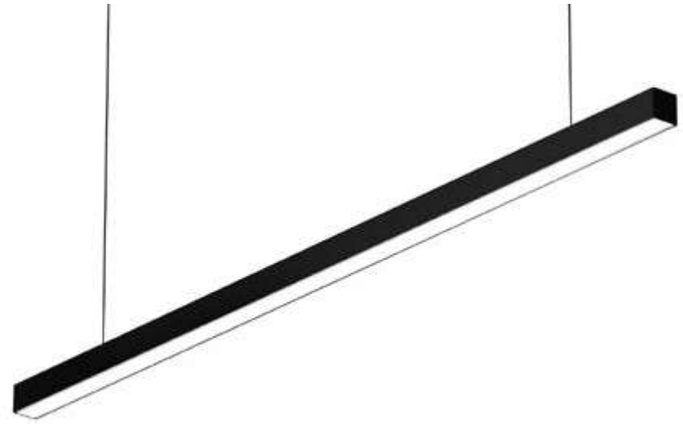

REMOTE

ON DEMAND

Emergency Lighting*
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS

ALBA
MINI

REF 10211.PN | 10211.SR

.PN
PENDANT

·10211 ALBA MINI | PN
Pag. 226

.SR
SURFACE

·10211 ALBA MINI | SR
Pag. 226

.RF
RECESSED FRAME

·10211 ALBA MINI | RF
Pag. 440

.TR
TRIMLESS

·10211 ALBA MINI | TR
Pag. 640



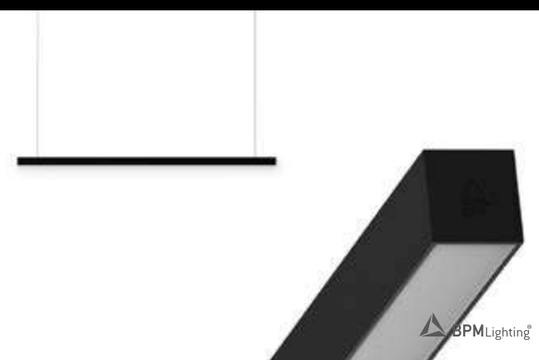

REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *3 | LUMEN .27	.30	.40	.TW *1	WATT K	TW	UPLIGHT ▲.UP *2 | LUMEN .27	.30	.40	WATT K	DIMM ▼
10211	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	265	274	349	4	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	397	411	522	6	
	.05	1405					3825	3975	4125	9500-9850	30	64	259	548	696	8	
	.06	1686					4590	4770	4950	11400-11820	35	76	661	685	870	10	
	.07	1967					5355	5565	5775	13300-13790	41	89	793	822	1044	12	
	.08	2248					6120	6360	6600	15200-15760	47	102	925	958	1218	14	

REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *3 | LUMEN .27	.30	.40	WATT	UPLIGHT ▲.UP *2 | LUMEN .27	.30	.40	WATT K	DIMM ▼
10211	.03	843	●	.OP .MP	.HI	.9	4590	4767	4956	35	568	587	747	8	.DA .PU .D1
	.04	1124					6120	6356	6608	47	851	880	1119	13	
	.05	1405					7650	7945	8260	59	1134	1173	1492	17	
	.06	1686					9180	9534	9912	71	1417	1466	1864	21	
	.07	1967					10710	11123	11564	83	1701	1760	2237	25	
	.08	2248					12240	12712	13216	94	1984	2053	2610	30	

Reference order | 10211.XX | .SR .PN | .XX.XX.XX.9.XX.XX.XX

Total length = Profile length + 25mm + 2x2mm (Cover kit)

+ Linear Joint Total length = Profile length + 25mm + [2x2mm (Cover kit)] + [Nº of UR03 x 8]

Joints, other than Linear joint, require a technical drawing

COMPONENTS

COVERT KIT	REF.	FINISH
	TF03 2x2mm.	●

Reference order | TF03 | .SR .PN | .XX

BOXES (.PN) Not-included, please select:

CONNECTION BOX	DRIVER BOX NON-DIMM	DRIVER BOX DIMMABLE	FINISH
			●
CB09.12	CB09.32	CB09.40	

Reference order | CB09.XX.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
					●
UR03	UL03	UT03	UC03	UV03	

Reference order | XX03 | .SR .PN | .XX

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMENSIONS ⬟	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX

● Select finishes

ALBA MINI

REF 10211.PN | 10211.SR

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700*mA.

*2 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both require 24VdC and remote driver with connection box CB0912. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas requieren 24Vd y driver en remoto con la caja de conexión CB0912.*

*3 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

Some product variations require an IP Box, seek advice from our technical team. *Algunas variaciones del producto requieren de una IP Box, consulte con nuestro equipo técnico*

FINISHES

● COLORS

DIMENSIONS

⬟ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m (each 2m)
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): Cabling 2 circuits, 2 x Feed Hose 5 x 0,75mm²
Diffuser
.SR
Surface mounting kit

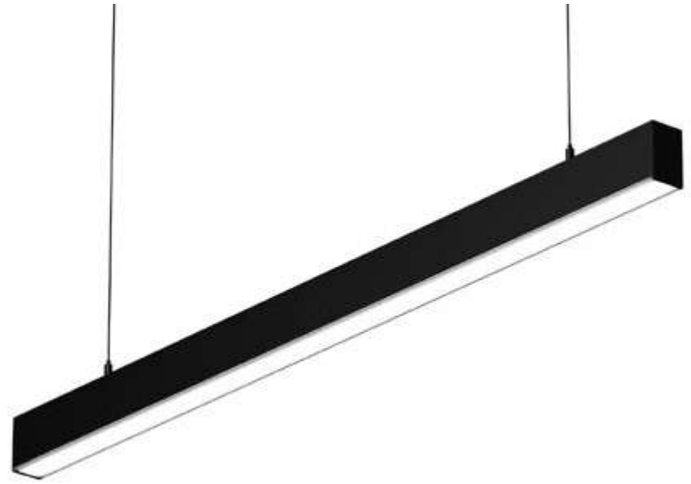

ON DEMAND

Emergency Lighting*
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06 | IP40 | LIFE 50000H | DIM OPTIONAL | INTEGRATED | INDOOR | 220-240 V 50-60 Hz | CE

ALBA

REF 10160.PN | 10160.SR

.PN
PENDANT
·10160 ALBA | PN
Pag. 230

.WS
WALL SURFACE
·10160 ALBA | WS
Pag. 786

.TK
TRACK
·10160 ALBA | TK
Pag. 760

.SR
SURFACE
·10160 ALBA | SR
Pag. 230

.RF
RECESSED FRAME
·10160 ALBA | RF
Pag. 444

.TR
TRIMLESS
·10160 ALBA | TR
Pag. 644



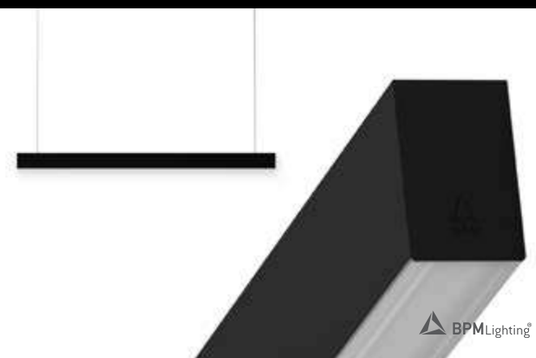

REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *3 | LUMEN .27	.30	.40	.TW *1	WATT K	TW	UPLIGHT .UP *2 | LUMEN .27	.30	.40	WATT K	DIMM ▼
10160	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	265	274	349	4	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	397	411	522	6	
	.05	1405					3825	3975	4125	9500-9850	30	64	529	548	696	8	
	.06	1686					4590	4770	4950	11400-11820	35	76	661	685	870	10	
	.07	1967					5355	5565	5775	13300-13790	41	89	793	822	1044	12	
	.08	2248					6120	6360	6600	15200-15760	47	102	925	958	1218	14	

REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *3 | LUMEN .27	.30	.40	WATT	UPLIGHT ▲.UP *2 | LUMEN .27	.30	.40	WATT	DIMM ▼
10160	.03	843	●	.OP .MP	.HI	.9	4590	4767	4956	35	568	587	747	8	.DA .PU .D1
	.04	1124					6120	6356	6608	47	851	880	1119	13	
	.05	1405					7650	7945	8260	59	1134	1173	1492	17	
	.06	1686					9180	9534	9912	71	1417	1466	1864	21	
	.07	1967					10710	11123	11564	83	1701	1760	2237	25	
	.08	2248					12240	12712	13216	94	1984	2053	2610	30	

Reference order | 10160.XX | .SR .PN | .XX.XX.XX.9.XX.XX.XX

Total length = Profile length + 20mm + 2x3mm (Cover kit)

COMPONENTS

COVERT KIT	REF.	FINISH
	TF02 2x3mm.	●

Reference order | TF02 | .SR .PN | .XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
					●
UR02	UL02	UT02	UC02	UV02	

Joints, other than Linear joint, require a technical drawing

Reference order | XX02 | .SR .PN | .XX

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMENSIONS ⬟	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX

Not-included, please select:

CONNECTION BOX	FINISH
	●
CB09.12	

Reference order | CB09.12.XX

● Select finishes

ALBA

REF 10160.PN | 10160.SR

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700*mA.
*2 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*
*3 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*
Some product variations require an IP Box, seek advice from our technical team. *Algunas variaciones del producto requieren de una IP Box, consulte con nuestro equipo técnico*

FINISHES

● COLORS

DIMENSIONS

⬟ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

UP-DOWN

LUMINAIRE INCLUDES

2 x Suspension cables 3m (each 2m)
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): Cabling 2 circuits, 2 x Feed Hose 5 x 0,75mm²
Diffuser

new

ON DEMAND

Emergency Lighting*
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

ALBA
NOVUS

REF 210011.PN

.PN
PENDANT

·210011 ALBA NOVUS | PN
Pag. 234

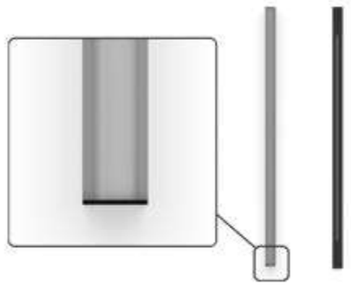

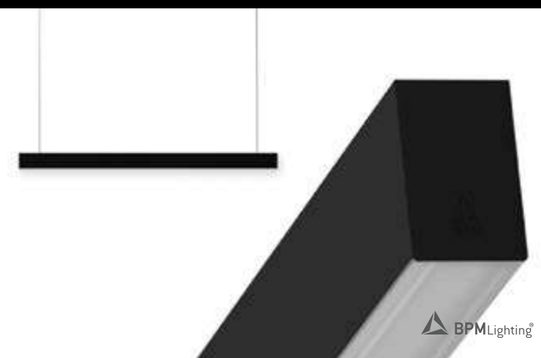

REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *4 | LUMEN .27	.30	.40	.TW *2	WATT K	TW	UPLIGHT ▲.UP *3 | LUMEN .27	.30	.40	WATT K	DIMM ▼
210011	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	265	274	349	4	.DA *1 .PU .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	397	411	522	6	
	.05	1405					3825	3975	4125	9500-9850	30	64	259	548	696	8	
	.06	1686					4590	4770	4950	11400-11820	35	76	661	685	870	10	
	.07	1967					5355	5565	5775	13300-13790	41	89	793	822	1044	12	
	.08	2248					6120	6360	6600	15200-15760	47	102	925	958	1218	14	

REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *4 | LUMEN .27	.30	.40	WATT	UPLIGHT ▲.UP *3 | LUMEN .27	.30	.40	WATT	DIMM ▼
210011	.03	843	●	.OP .MP	.HI	.9	4590	4767	4956	35	568	587	747	8	.DA *1 .PU .D1
	.04	1124					6120	6356	6608	47	851	880	1119	13	
	.05	1405					7650	7945	8260	59	1134	1173	1492	17	
	.06	1686					9180	9534	9912	71	1417	1466	1864	21	
	.07	1967					10710	11123	11564	83	1701	1760	2237	25	
	.08	2248					12240	12712	13216	94	1984	2053	2610	30	

Reference order | 210011.XX.PN.XX.XX.XX.9.XX.XX.XX

Total length = Profile length + 20mm + 2x3mm (Cover kit)

COMPONENTS

COVERT KIT	REF.	FINISH
	TF07 2x3mm.	●

Reference order | TF07.PN.XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

JOINTS

LINEAR JOINT	ANGLE JOINT 2 LINES	ANGLE JOINT 3 LINES	CROSS JOINT	WALL-CEILING JOINT	FINISH
			X	X	●
UR07	AM07	AMY07	X	X	

Joints, other than Linear joint, require a technical drawing

Reference order | XX07 | .SR .PN | .XX

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMENSIONS ⬟	mm	FINISH
 30 45 120	SC21	.60	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX

Not-included, please select:

CONNECTION BOX	FINISH
 45 120	●
CB09.12	

Reference order | CB09.12.XX

● Select finishes

.WH-WH .BK-BK .GC-GC .BM-BM .BS-BS .BC-BC .CR-CR .CB-CB .GY-GY .MG-MG .VC-VC .YM-YM

ALBA NOVUS

REF 210011.PN

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED

SC03.SA
WIRE 3M.

PROFILE



*1 DALI protocol requires remote driver. *Protocolo DALI requiere driver en remoto.*
*2 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700*mA.
*3 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*
*4 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

FINISHES

● COLORS

DIMENSIONS

⬟ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

UP - DOWN

LUMINAIRE INCLUDES

2 x Suspension cables 3m (each 2m)
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): Cabling 2 circuits, 2 x Feed Hose 5 x 0,75mm²
Diffuser

new

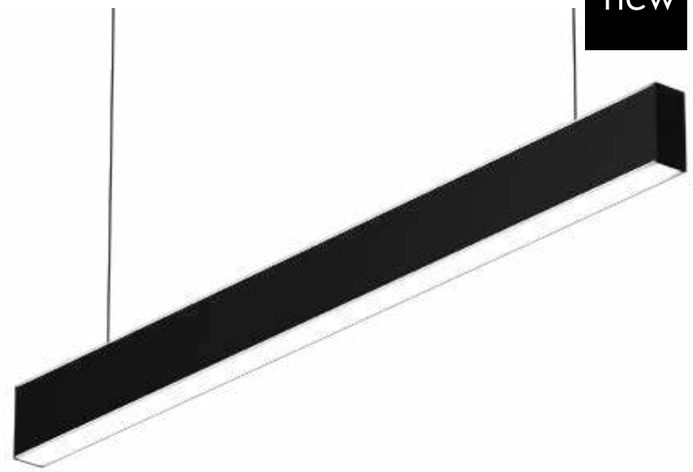

ON DEMAND

Emergency Lighting*
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80
HI power

* Delivered separately
(not installed in luminaire).

.PN

PENDANT

INSTALLATIONS

ALBA
DOUBLE

REF 10215.PN

.PN
PENDANT

·10215 ALBA DOUBLE | PN
Pag. 238

.WS
WALL SURFACE

·10215 ALBA DOUBLE | WS
Pag. 790

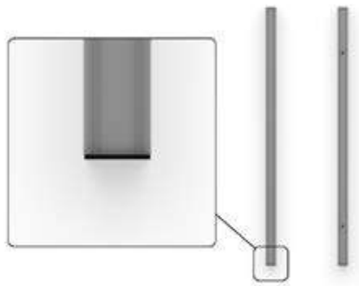

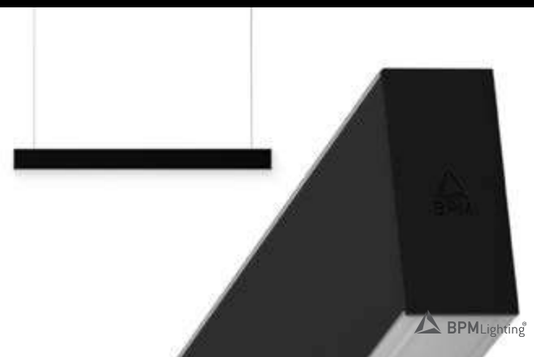

REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *2 | LUMEN .27	.30	.40	.TW *1	WATT K	TW	UPLIGHT *2 | LUMEN .27	.30	.40	.TW *1	WATT K	TW	DIMM ▼
10215	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	3060	3180	3300	7600-7880	24	51	
	.05	1405					3825	3975	4125	9500-9850	30	64	3825	3975	4125	9500-9850	30	64	
	.06	1686					4590	4770	4950	11400-11820	35	76	4590	4770	4950	11400-11820	35	76	
	.07	1967					5355	5565	5775	13300-13790	41	89	5355	5565	5775	13300-13790	41	89	
	.08	2248					6120	6360	6600	15200-15760	47	102	6120	6360	6600	15200-15760	47	102	

Reference order | 10215.XX.PN.XX.XX.ST.9.XX.XX

Total length = Profile length +40mm + 2x3mm (Cover kit)

COMPONENTS

COVERT KIT	REF.	FINISH
	TF04 2x3mm.	●

Reference order | TF04 | .SR .PN | ● .XX

JOINTS

LINEAR JOINT
UR04

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	**SC05**	5M.	**.SA**
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMENSIONS ⬟	mm	FINISH
	**SC21**	**.60**	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX

Not-included, please select:

CONNECTION BOX	FINISH
	●
CB09.12	

Reference order | CB09.12.XX

.PN

PENDANT

● Select finishes



ALBA DOUBLE

REF 10215.PN

PHOTOMETRY



OPAL | MICROPRISMATIC

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700*mA.

*2 Down light (direct light) and up light (.UP) work at 500mA. *La luz directa e indirecta (.UP) trabaja a 500mA.*

FINISHES

● EXTERNAL COLOR

INTERNAL COLOR

⬟ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

TRANSPARENT

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

ASYMETRIC DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m (each 2m)
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN: 1 x Feed Hose 5 x 0,75mm²
.SR
Surface mounting kit

new

Optimal distance from the wall: 0.5m.
Distancia óptima con respecto a la pared: 0.5m.

ON DEMAND

Emergency Lighting*
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

ALBA
ASIMETRIC

REF 210009.PN | 210009.SR

.PN
PENDANT

·210009 ALBA ASIMETRIC
| PN - Pag. 242

.WS
WALL SURFACE

·210009 ALABA ASIMETRIC
| WS - Pag. 794

.SR
SURFACE

·210009 ALBA ASIMETRIC
| SR - Pag. 242

.RF
RECESSED FRAME

·210009 ALBA ASIMETRIC
| RF - Pag. 448

.TR
TRIMLESS

·210009 ALBA ASIMETRIC
| TR - Pag. 648

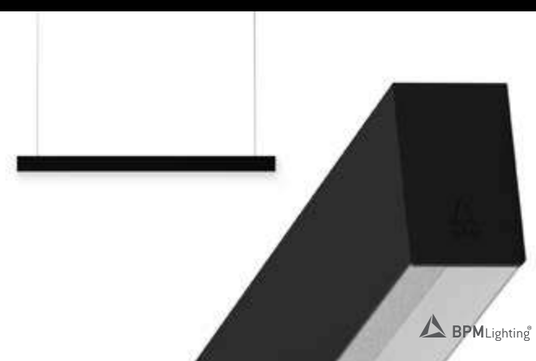

REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *4 | LUMEN .27	.30	.40	.TW *1	WATT K	TW	UPLIGHT .UP *2 | LUMEN .27	.30	.40	WATT K	DIMM ▼
210009	.03	843	●	.TP	.ST	.9	2295	2385	2475	5700-5910	18	38	265	274	349	4	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	397	411	522	6	
	.05	1405					3825	3975	4125	9500-9850	30	64	529	548	696	8	
	.06	1686					4590	4770	4950	11400-11820	35	76	661	685	870	10	
	.07	1967					5355	5565	5775	13300-13790	41	89	793	822	1044	12	
	.08	2248					6120	6360	6600	15200-15760	47	102	925	958	1218	14	

REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *4 | LUMEN .27	.30	.40	WATT	UPLIGHT ▲.UP *2 | LUMEN .27	.30	.40	WATT	DIMM ▼
210009	.03	843	●	.TP	.HI	.9	4590	4767	4956	35	568	587	747	8	.DA .PU .D1
	.04	1124					6120	6356	6608	47	851	880	1119	13	
	.05	1405					7650	7945	8260	59	1134	1173	1492	17	
	.06	1686					9180	9534	9912	71	1417	1466	1864	21	
	.07	1967					10710	11123	11564	83	1701	1760	2237	25	
	.08	2248					12240	12712	13216	94	1984	2053	2610	30	

Reference order | 210009.XX | .SR .PN | ● .XX | ■ .XX.XX | ▼ .XX.9.XX.XX

Total length = Profile length + 20mm + 2x3mm (Cover kit)

COMPONENTS

COVERT KIT	REF.	FINISH
	TF06 2x3mm.	●

Reference order | TF06 | .SR .PN | ● .XX

JOINTS

LINEAR JOINT
UR06

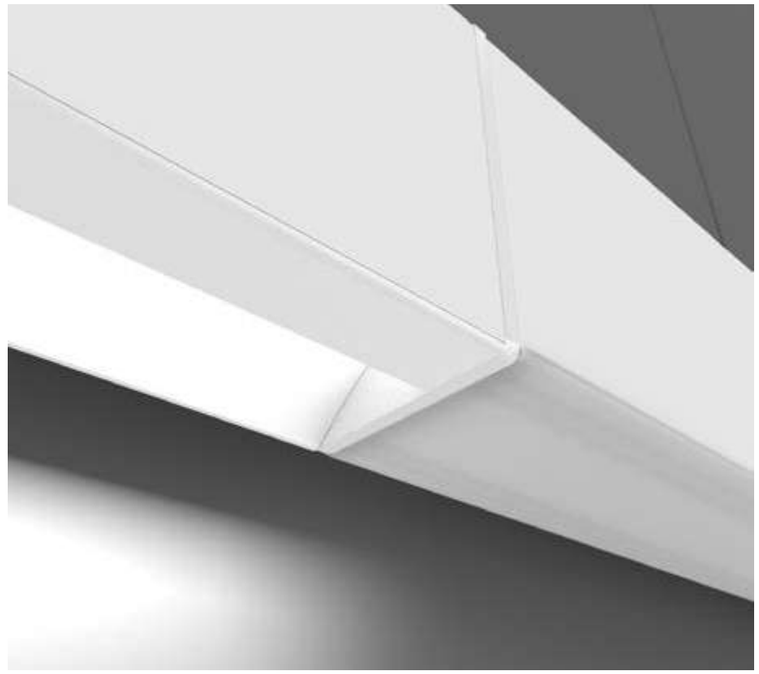

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	**SC05**	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMENSIONS ⬟	mm	FINISH
	**SC21**	**.60**	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX

Not-included, please select:

CONNECTION BOX	FINISH
	●
CB09.12	

Reference order | CB09.12.XX

● Select finish

ALBA
ASIMETRIC

REF 210009.PN | 210009.SR

PHOTOMETRY

TRANSPARENT PC

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700*mA.
*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

FINISHES

● COLORS

DIMENSIONS

⬟ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m (each 2m)
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
Diffuser
.SR
Surface mounting kit

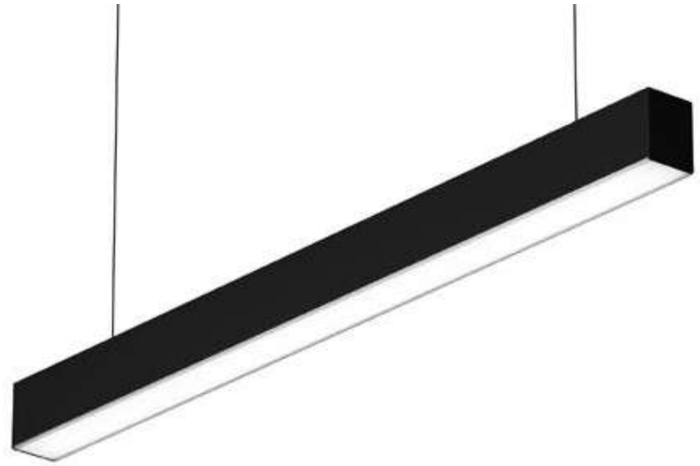

ON DEMAND

Emergency Lighting*
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06 | IP40 | L80 50000H | DIM OPTIONAL | INTEGRATED | INDOOR | 220-240 V 50-60 Hz | CE

ALBA PLUS

REF 10178.PN | 10178.SR

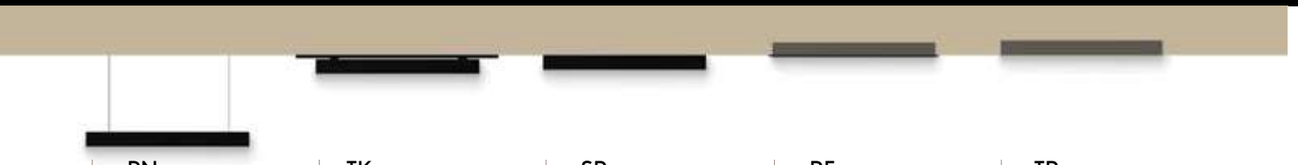

.PN
PENDANT

·10178 ALBA PLUS | PN
Pag. 246

.TK
TRACK

·10178 ALBA PLUS | TK
Pag. 764

.SR
SURFACE

·10178 ALBA PLUS | SR
Pag. 246

.RF
RECESSED FRAME

·10178 ALBA PLUS | RF
Pag. 452

.TR
TRIMLESS

·10178 ALBA PLUS | TR
Pag. 652



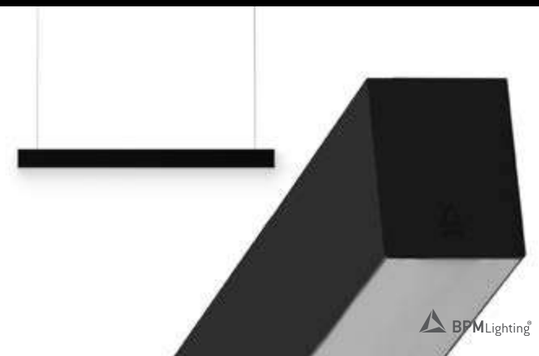

REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *3 | LUMEN .27	.30	.40	.TW *1	WATT K	TW	UPLIGHT ▲.UP *2 | LUMEN .27	.30	.40	WATT K	DIMM ▼
10178	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	265	274	349	4	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	397	411	522	6	
	.05	1405					3825	3975	4125	9500-9850	30	64	259	548	696	8	
	.06	1686					4590	4770	4950	11400-11820	35	76	661	685	870	10	
	.07	1967					5355	5565	5775	13300-13790	41	89	793	822	1044	12	
	.08	2248					6120	6360	6600	15200-15760	47	102	925	958	1218	14	

REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *3 | LUMEN .27	.30	.40	WATT	UPLIGHT ▲.UP *2 | LUMEN .27	.30	.40	WATT K	DIMM ▼
10178	.03	843	●	.OP .MP	.HI	.9	4590	4767	4956	35	568	587	747	8	.DA .PU .D1
	.04	1124					6120	6356	6608	47	851	880	1119	13	
	.05	1405					7650	7945	8260	59	1134	1173	1492	17	
	.06	1686					9180	9534	9912	71	1417	1466	1864	21	
	.07	1967					10710	11123	11564	83	1701	1760	2237	25	
	.08	2248					12240	12712	13216	94	1984	2053	2610	30	

Reference order | 10178.XX | .SR .PN | .XX.XX.XX.9.XX.XX.XX

Total length = Profile length + 20mm + 2x3mm (Cover kit)

COMPONENTS

COVERT KIT	REF.	FINISH
	TF01 2x3mm.	●

Reference order | TF01 | .SR .PN | .XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
					●
UR01	UL01	UT01	UC01	UV01	

Joints, other than Linear joint, require a technical drawing

Reference order | XX01 | .SR .PN | .XX

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMENSIONS ⬟	mm	FINISH
	SC21	.60	600	
		.80	800	●
		.100	1000	

Reference order | SC21.XX.XX

Not-included, please select:

CONNECTION BOX	FINISH
	●
CB09.12	

Reference order | CB09.12.XX

● Select finishes

ALBA PLUS

REF 10178.PN | 10178.SR

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700*mA.
*2 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*
*3 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

FINISHES

● EXTERNAL COLOR

INTERNAL COLOR

⬟ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

TRANSPARENT

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

ASYMETRIC DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m (each 2m)
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN: 1 x Feed Hose 5 x 0,75mm²
Connection box SB09.12
.SR
Surface mounting kit

new

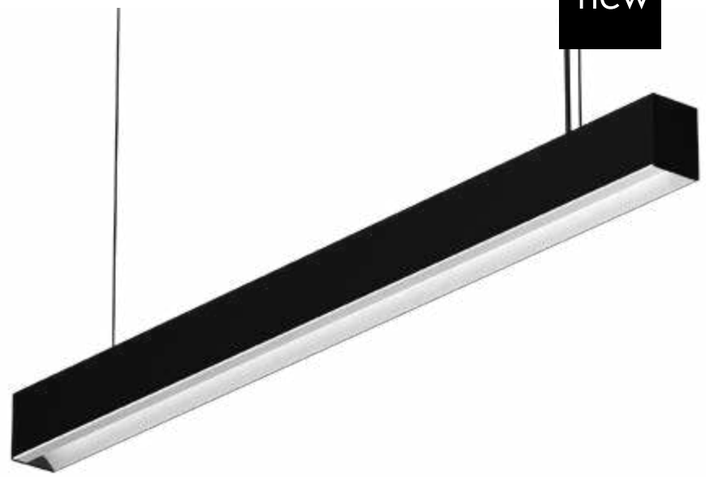

Optimal distance from the wall: 0.5m.
Distancia óptima con respecto a la pared: 0.5m.

ON DEMAND

Emergency Lighting*
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80
Motion Detection

* Delivered separately
(not installed in luminaire).

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS

.PN
PENDANT

·210008 ALBA PLUS
ASIMETRIC | PN - Pag. 250

.SR
SURFACE

·210008 ALBA PLUS
ASIMETRIC | SR - Pag. 250

.RF
RECESSED FRAME

·210008 ALBA PLUS
ASIMETRIC | RF - Pag. 456

.TR
TRIMLESS

·210008 ALBA PLUS
ASIMETRIC | TR - Pag. 656

ALBA
PLUS ASIMETRIC

REF 210008.PN | 210008.SR



REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUS-ER ■	POWER	CRI	DOWNLIGHT *3 | LUMEN .27	.30	.40	.TW *1	WATT K	TW	UPLIGHT ▲.UP *2 | LUMEN .27	.30	.40	WATT K	DIMM ▼
210008	.03	843	●	.TP	.ST	.9	2295	2385	2475	5700-5910	18	38	265	274	349	4	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	397	411	522	6	
	.05	1405					3825	3975	4125	9500-9850	30	64	259	548	696	8	
	.06	1686					4590	4770	4950	11400-11820	35	76	661	685	870	10	
	.07	1967					5355	5565	5775	13300-13790	41	89	793	822	1044	12	
	.08	2248					6120	6360	6600	15200-15760	47	102	925	958	1218	14	

REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUS-ER ■	POWER	CRI	DOWNLIGHT *3 | LUMEN .27	.30	.40	WATT	UPLIGHT ▲.UP *2 | LUMEN .27	.30	.40	WATT K	DIMM ▼
210008	.03	843	●	.TP	.HI	.9	4590	4767	4956	35	568	587	747	8	.DA .PU .D1
	.04	1124					6120	6356	6608	47	851	880	1119	13	
	.05	1405					7650	7945	8260	59	1134	1173	1492	17	
	.06	1686					9180	9534	9912	71	1417	1466	1864	21	
	.07	1967					10710	11123	11564	83	1701	1760	2237	25	
	.08	2248					12240	12712	13216	94	1984	2053	2610	30	

Reference order | 210008.XX | .SR .PN | .XX.XX.XX.9.XX.XX

Total length = Profile length + 20mm + 2x3mm (Cover kit)

COMPONENTS

COVERT KIT	REF.	FINISH
	TF05 2x3mm.	●

Reference order | TF05 | .SR .PN | .XX

JOINTS

LINEAR JOINT
UR05

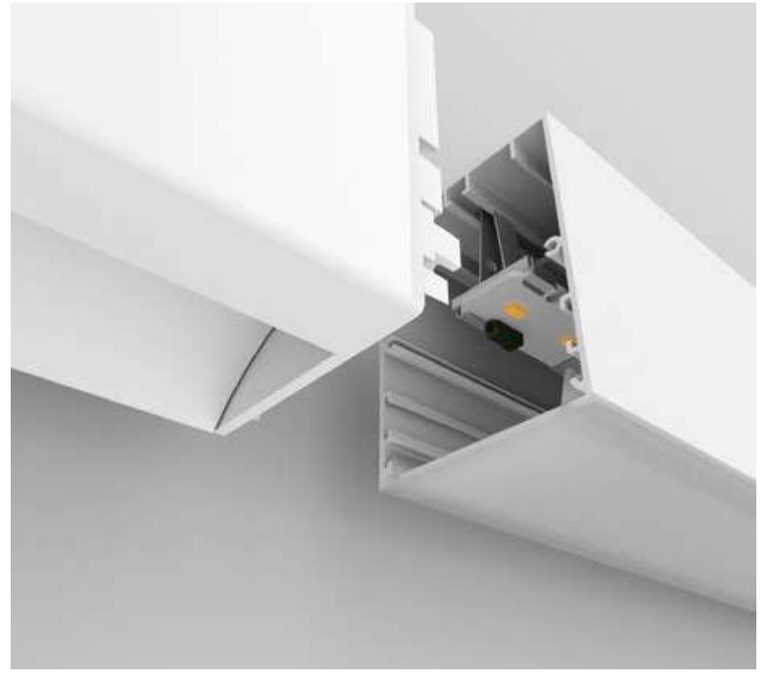

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMEN-SION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMEN-SIONS ⬟	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX

Not-included, please select:

CONNECTION BOX	FINISH
	●
CB09.12	

Reference order | CB09.12.XX

● Select finish

ALBA
PLUS ASIMETRIC

REF 210008.PN | 210008.SR

PHOTOMETRY

TRANSPARENT PC

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700*mA.
*2 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*
*3 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

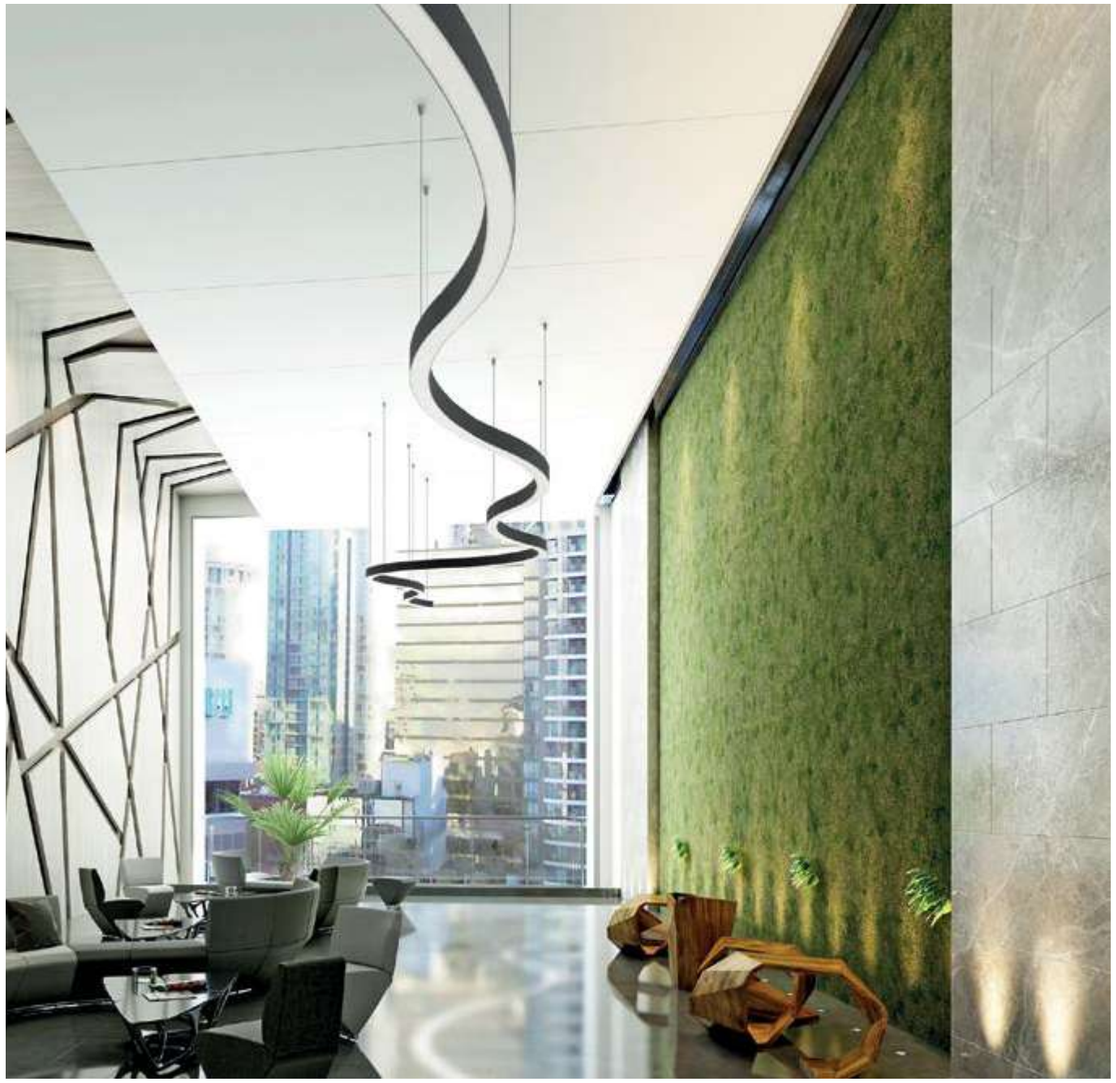

FINISHES

● COLORS

DIMENSIONS

⬟ PROFILE LENGTHS mm.

843	1124	1405	1686
800	1520	2950	5100

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m (each 2m or each shape)
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN: 1 x Feed Hose 5 x 0,75mm²
Diffuser
.SR
Surface mounting kit

SOON

ON DEMAND

Emergency Lighting *
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

BOLD | BOLD LINE

REF 210001.PN | 210015.PN | 210001.SR | 210015.SR

ALUMINIUM PC · 0° · 0° · CRI ≥90 · IK06 · IP40 · LIFE 50000H · DIM OPTIONAL · INTEGRATED · INDOOR · 220-240 V 50-60 Hz · CE

INSTALLATIONS

.PN
PENDANT

·210001 BOLD ·210015 BOLD LINE | PN
Pag. 254

.SR
SURFACE

·210001 BOLD ·210015 BOLD LINE | SR
Pag. 254

.RF
RECESSED FRAME

·210001 BOLD ·210015 BOLD LINE |RF
Pag. 460

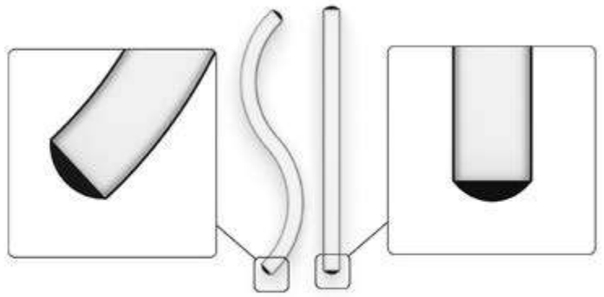

BOLD						
.01 800 mm | 45º	**.02** 800 mm | 90º	**.03** 1520 mm | 45º	**.04** 1520 mm | 90º	**.05** 2950 mm | 45º	**.06** 2950 mm | 90º	**.07** 5100 mm | 45º

REF.	DIMENSION ⬟	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *1 | LUMEN .27	.30	.40	WATT	DIMM ▼
210001	.01	●	.OP	.ST	.9	765	795	825	6	.DA .PU .D1
	.02					1530	1590	1650	12	
	.03					1530	1590	1650	12	
	.04					3060	3180	3300	24	
	.05					3060	3180	3300	24	
	.06					6120	6360	6600	47	
	.07					5355	5565	5775	41	

REF.	DIMENSION ⬟	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *1 | LUMEN .27	.30	.40	WATT	DIMM ▼
210001	.01	●	.OP	.HI	.9	1530	1589	1652	12	.DA .PU .D1
	.02					3060	3178	3304	24	
	.03					3060	3178	3304	24	
	.04					6120	6356	6608	47	
	.05					6120	6356	6608	47	
	.06					12240	12712	13216	94	
	.07					10710	11123	11564	83	

Reference order | 210001.XX | .SR .PN | .XX.XX.XX.9.XX.XX

BOLD LINE	REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *1 | LUMEN .27	.30	.40	WATT K	DIMM ▼
	210015	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	18	.DA .PU .D1
		.04	1124					3060	3180	3300	24	
		.05	1405					3825	3975	4125	30	
		.06	1686					4590	4770	4950	35	

BOLD LINE	REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *1 | LUMEN .27	.30	.40	WATT K	DIMM ▼
	210015	.03	843	●	.OP .MP	.ST	.9	4590	4767	4956	35	.DA .PU .D1
		.04	1124					6120	6356	6608	47	
		.05	1405					7650	7945	8260	59	
		.06	1686					9180	9534	9912	71	

Reference order | 210015.XX | .SR .PN | .XX.XX.XX.9.XX.XX

COMPONENTS

COVERT KIT	REF.
	TF17

Reference order | TF17.PN.XX

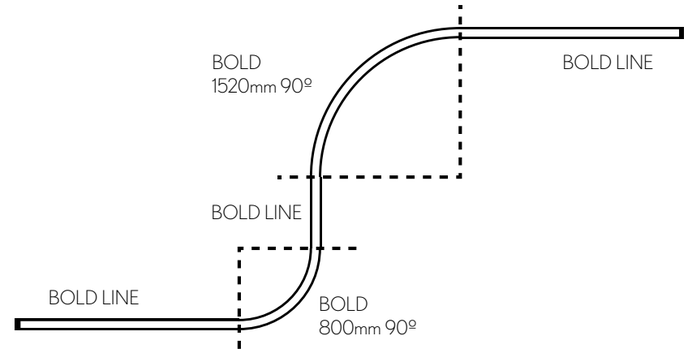

● Select lens finishes

BOLD | BOLD LINE

REF 210001.PN | 210015.PN | 210001.SR | 210015.SR

PHOTOMETRY

OPAL

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



*1 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

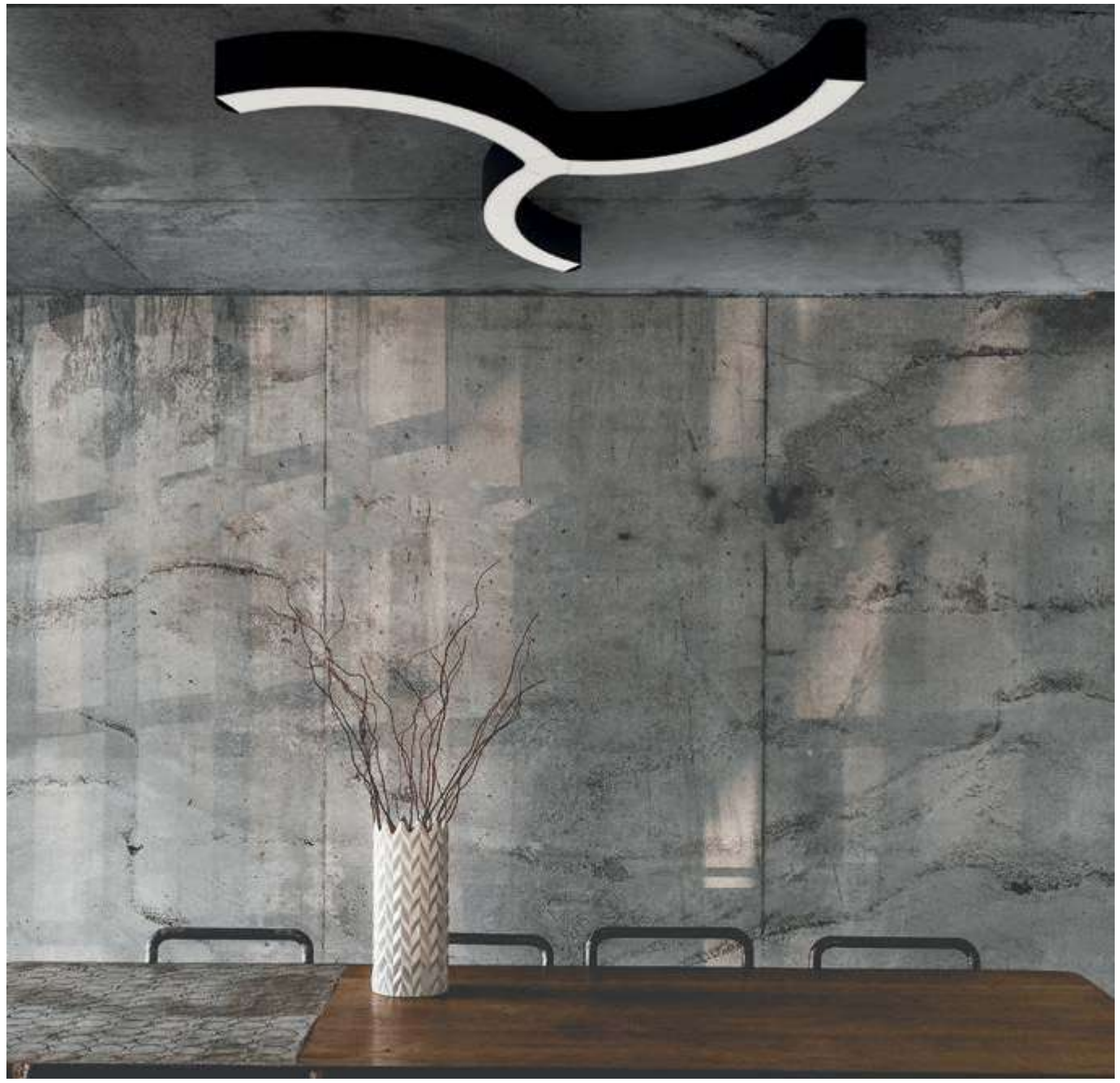

FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS

.01

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN
4 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN : 1 x Feed Hose 5 x 0,75mm²
Diffuser
.SR
Surface mounting kit

SOON

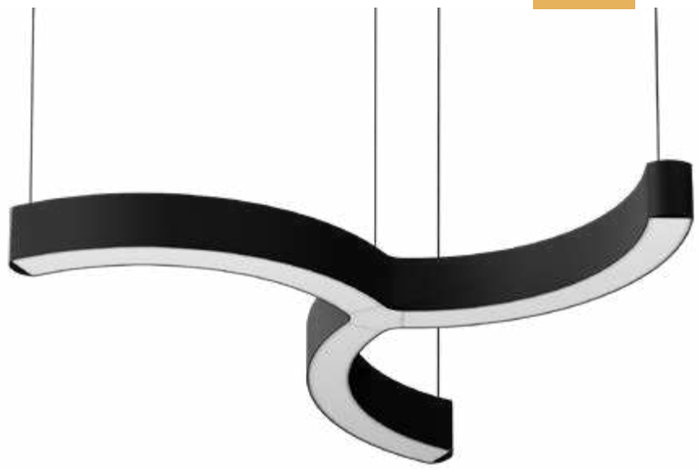

ON DEMAND

Emergency Lighting *
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS

TRIBOLD

REF 210018.PN | 210018.SR

.PN
PENDANT

·210018 TRIBOLD | PN
Pag. 258

.SR
SURFACE

·210018 TRIBOLD | SR
Pag. 258



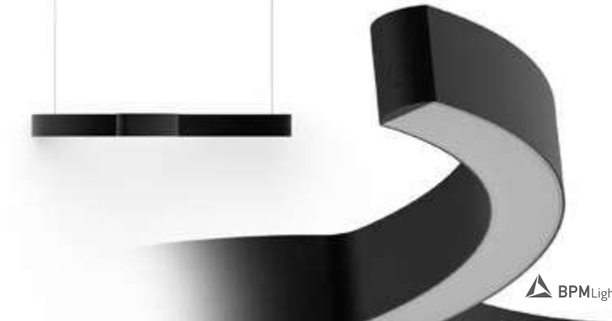

TRIBOLD	REF.	DIMENSION ⬟	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *1 | LUMEN .27	.30	.40	WATT K	DIMM ▼	SKETCH
	210018	.01	●	.OP	.ST	.9	4781	4969	5156	37	.DA .PU .D1	
					.HI		9563	9931	10325	74		

Reference order | 210018.XX ⬟ | .SR .PN | .XX ● .OP ■ .XX.9.XX ▼ .XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF17	●

Reference order | TF17 | .SR .PN | .XX ●

● Select lens finishes

TRIBOLD

REF 210018.PN | 210018.SR

PHOTOMETRY



OPAL

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



*1 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

FINISHES

● EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m (each 2m)
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
DIM DOWN-UP (only): Cabling 2 circuits, 2 x Feed Hose 5 x 0,75mm²
Diffuser &Electric system
.SR
Surface mounting kit

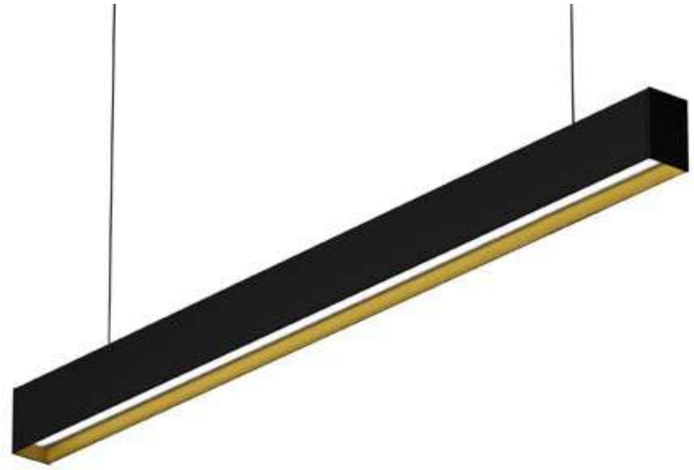

ON DEMAND

Emergency Lighting *
Motion Detection
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

.SR

.PN

PENDANT | SURFACE

INSTALLATIONS

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06 | IP40 | L80 B10 50000H | DIM OPTIONAL | INTEGRATED | INDOOR | 220-240 V 50-60 Hz | CE

WING

REF 10200.PN | 10200.SR

.PN
PENDANT

·10200 WING | PN
Pag. 262

.SR
SURFACE

·10200 WING | SR
Pag. 262

.RF
RECESSED FRAME

·10200 WING | RF
Pag. 464

.TR
TRIMLESS

·10200 WING | TR
Pag. 660



REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUS-ER ■	POWER	CRI	DOWNLIGHT *4 | LUMEN .27	.30	.40	.TW *2	WATT K	TW	UPLIGHT ▲.UP *3 | LUMEN .27	.30	.40	WATT K	DIMM ▼
10200	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	265	274	349	4	.DA*1 .PU .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	397	411	522	6	
	.05	1405					3825	3975	4125	9500-9850	30	64	259	548	696	8	
	.06	1686					4590	4770	4950	11400-11820	35	76	661	685	870	10	
	.07	1967					5355	5565	5775	13300-13790	41	89	793	822	1044	12	
	.08	2248					6120	6360	6600	15200-15760	47	102	925	958	1218	14	

REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUS-ER ■	POWER	CRI	DOWNLIGHT *4 | LUMEN .27	.30	.40	WATT	UPLIGHT ▲.UP *3 | LUMEN .27	.30	.40	WATT	DIMM ▼
10200	.03	843	●	.OP .MP	.HI	.9	4590	4767	4956	35	568	587	747	8	.DA*1 .PU .D1
	.04	1124					6120	6356	6608	47	851	880	1119	13	
	.05	1405					7650	7945	8260	59	1134	1173	1492	17	
	.06	1686					9180	9534	9912	71	1417	1466	1864	21	
	.07	1967					10710	11123	11564	83	1701	1760	2237	25	
	.08	2248					12240	12712	13216	94	1984	2053	2610	30	

Reference order | 10200.XX | .SR .PN | .XX.XX.XX.9.XX.XX.XX

Total length = Profile length + 20mm + 2x3mm (Cover kit)

COMPONENTS

COVERT KIT	REF.	FINISH
	TF13 2x3mm.	●

Reference order | TF13 | .SR .PN | ● .XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

JOINTS

LINEAR JOINT
UR13

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMEN-SION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMEN-SIONS ⬟	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX

Not-included, please select:

CONNECTION BOX	FINISH
	●
CB09.12	

Reference order | CB09.12.XX

● Select finishes

WING

REF 10200.PN | 10200.SR

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED (.PN)

SC03.SA
WIRE 3M.

PROFILE



*1 DALI protocol requires remote driver. *Protocolo DALI requiere driver en remoto.*
2 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700mA.
*3 Uplight (.UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. *La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.*
*4 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

FINISHES

● COLORS

DIMENSIONS

⬟ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

2 x Suspension cables 3m (each 2m)
Diffuser
Connection Box

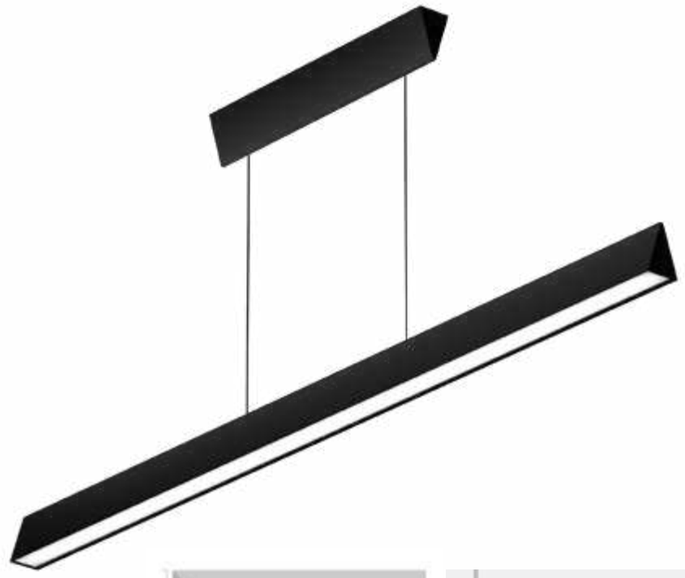

ON DEMAND

Emergency Lighting *
Motion Detection
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

.PN

PENDANT

INSTALLATIONS

ALZIRA

REF 10169.PN

.PN
PENDANT

·10169 ALZIRA | PN
Pag. 266

.WS
WALL SURFACE

·10169 ALZIRA | WS
Pag. 798



REF.	PROFILE LENGTH ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT *2 | LUMEN .27	.30	.40	.TW *1	WATT K	TW	DIMM ▼
10169	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	
	.05	1405					3825	3975	4125	9500-9850	30	64	
	.06	1686					4590	4770	4950	11400-11820	35	76	
	.07	1967					5355	5565	5775	13300-13790	41	89	
	.08	2248					6120	6360	6600	15200-15760	47	102	

REF.	PROFILE LENGTH ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT *2 | LUMEN .27	.30	.40	WATT	DIMM ▼
10169	.03	843	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1124					6120	6356	6608	47	
	.05	1405					7650	7945	8260	59	
	.06	1686					9180	9534	9912	71	
	.07	1967					10710	11123	11564	83	
	.08	2248					12240	12712	13216	94	

Reference order | 10169.XX.PN.XX.XX.XX.9.XX.XX

Total length = Profile length + 20mm + 2x3mm (Cover kit)

COMPONENTS

COVERT KIT	REF.	FINISH
	TF14 2x3mm.	●

Reference order | TF14.PN.XX

● Select finishes

ALZIRA

REF 10169.PN

PHOTOMETRY

OPAL MICROPRISMATIC

INCLUDED (.PN)



CONNECTION BOX SC03.SA WIRE 3M.

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700mA.*

*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

ACOUSTIC
SYSTEM

Sustainability, acoustics & lighting in one solution

Pleasing lighting and sound solutions. Everything in perfect harmony. That's BPM Acoustic, an innovative response to specific lighting for noisy areas and when peace and quiet are essential.
BPM Acoustic also features avant-garde panel design, with a hidden lighting solution to achieve a quiet environment in an unobtrusive way. And another plus point is sustainability.

Sostenibilidad, acústica e iluminación en una solución

Soluciones lumínicas, acústicas y estéticas. Todo a la vez, y todo en armonía. Así es BPM Acoustic, una respuesta innovadora a necesidades específicas de iluminación en espacios de gran carga sonora o donde se requiere de un ambiente de silencio.
BPM Acoustic es además una propuesta vanguardista en cuanto a diseño de panel, con una solución de iluminación oculta para incidir en el concepto de discreción y tranquilidad con el valor incorporado de la sostenibilidad.

BPMLighting®
Let's get brighter

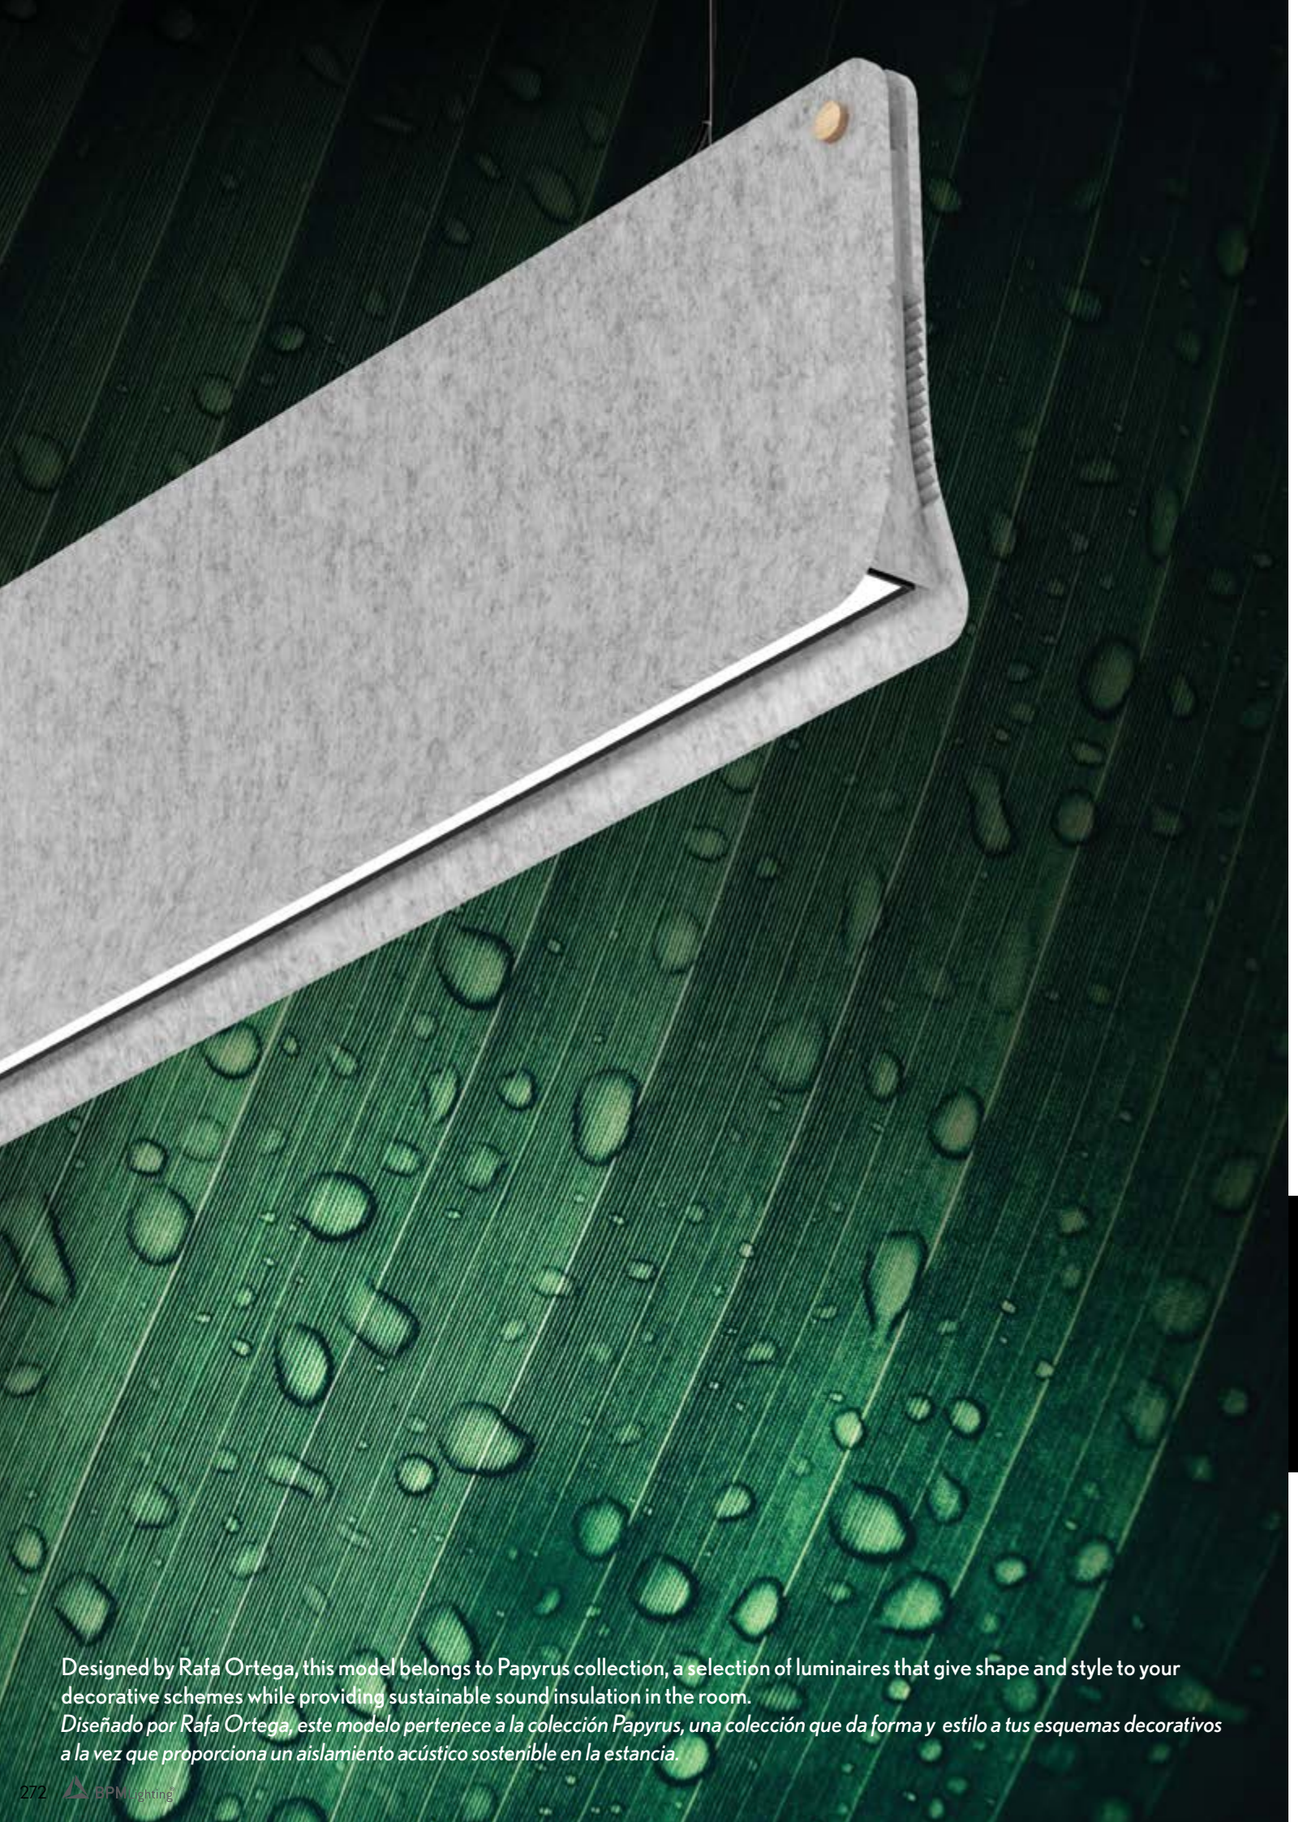

Designed by Rafa Ortega, this model belongs to Papyrus collection, a selection of luminaires that give shape and style to your decorative schemes while providing sustainable sound insulation in the room.
Diseñado por Rafa Ortega, este modelo pertenece a la colección Papyrus, una colección que da forma y estilo a tus esquemas decorativos a la vez que proporciona un aislamiento acústico sostenible en la estancia.

FINISHES

● ACOUSTIC COLORS

● PROFILE COLORS

DIMENSIONS

⬟ LENGTHS mm.

1200

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

2 x Suspension cables 3m
NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
Connection Box (CB09.32)
Cover Kit
Diffuser

new

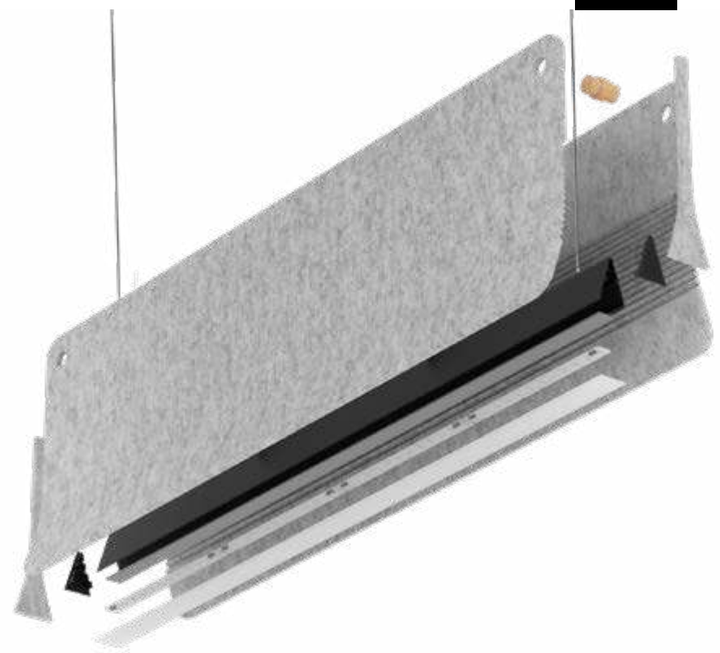

ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Special Color Temperature
RGB
TW
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

.PN

PENDANT

ACOUSTIC ALZIRA

Designed by Rafa Ortega

REF 230002.PN

REF.	DIMENSION ⬟	FINISH ●		DIFFUSER ■	POWER	CRI	DOWNLIGHT * | LUMEN .27	.30	.40	WATT K	DIMM ▼
230002	**.01** 1200mm	**.50** **.51**	**WH** **BK**	**.OP** **.MP**	.ST	.9	3060	3180	3300	24	**.DA** **.PU** **.D1**

Reference order | ⬟ ● ■ ▼

230002.01.PN.XX-XX.XX.XX.9.XX.XX

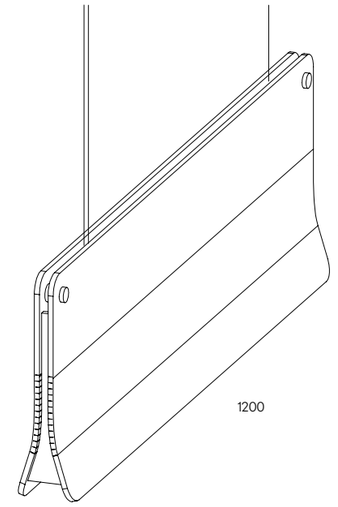



* Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

- Select Acoustic finishes



- Select Profile finishes

ACOUSTIC ALZIRA

Designed by Rafa Ortega

REF 230002.PN

ACOUSTIC PROPERTIES

ENVIRONMENTAL:	Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1. Standards
FIRE TEST:	Classification B-s1, d0 and CTEDB-SI Compliant
BAFFLE THIKNESS:	9mm
BABBLE DENSITY:	155Kg/m^3
SOUND ABSORBTION COEFFICIENT:	0,77 αw

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED



CONNECTION BOX

SC03.SA WIRE 3M.

COVERT KIT

PROFILE



Designed by Rafa Ortega, this model belongs to Papyrus collection, a selection of luminaires that give shape and style to your decorative schemes while providing sustainable sound insulation in the room.
Diseñado por Rafa Ortega, este modelo pertenece a la colección Papyrus, una colección que da forma y estilo a tus esquemas decorativos a la vez que proporciona un aislamiento acústico sostenible en la estancia.

new

FINISHES

● ACOUSTIC COLORS

● PROFILE COLORS

DIMENSIONS

⬟ LENGTHS mm.

1200

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN: 1 x Feed Hose 5 x 0,75mm²
Diffuser - Cover Kit
Connection Box CB09.12
.SR
Surface mounting kit

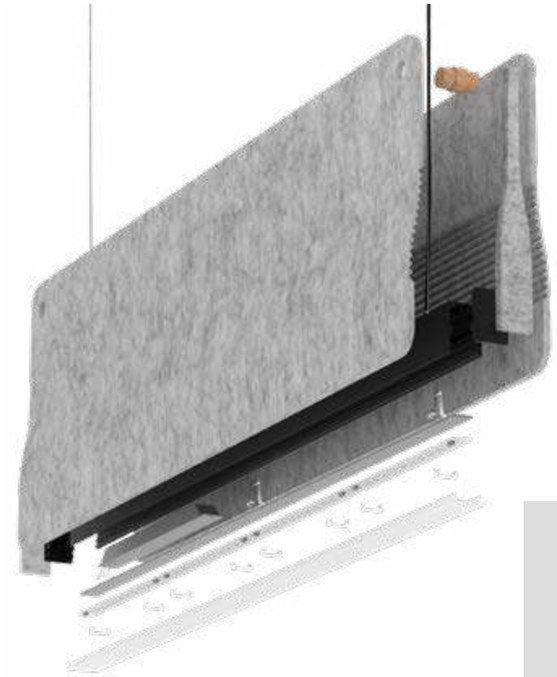

ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Special Color Temperature
RGB
TW
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately (not installed in luminaire).

ACOUSTIC ALBA

Designed by Rafa Ortega

REF 230004.PN | 230004.SR

REF.	DIMENSION ⬟	FINISH ●		DIFFUSER ■	POWER	CRI	DOWNLIGHT * | LUMEN .27	.30	.40	WATT	DIMM ▼
230004	**.01** 1200mm	**.50** **.51**	**WH** **BK**	**.OP** **.MP**	**.ST**	**.9**	3060	3180	3300	24	**.DA** **.PU** **.D1**

Reference order | 230004.01 ⬟ | .SR | .PN | .XX-XX.XX.ST.9.XX.XX ● ■ ▼



.PN

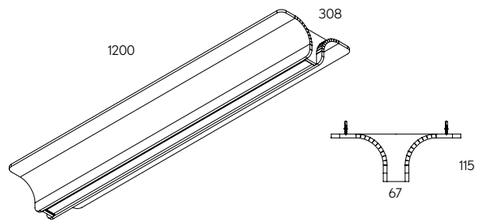

.SR

***** Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

- Select Acoustic finishes



.50 .51

- Select Profile finishes

.WH .BK

ACOUSTIC ALBA

Designed by Rafa Ortega

REF 230004.PN | 230004.SR

ACOUSTIC PROPERTIES

ENVIRONMENTAL:	Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1. Standards
FIRE TEST:	Classification B-s1, d0 and CTEDB-SI Compliant
BAFFLE THIKNESS:	12 mm
BABBLE DENSITY:	190Kg/m^3
SOUND ABSORBTION COEFFICIENT:	0,92 αw

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED



CB09.12 CONNECTION BOX | SC03.SA WIRE 3M. | COVER KIT

PROFILE



FINISHES

● ACOUSTIC COLORS

● PROFILE COLORS

DIMENSIONS

⬟ LENGTHS mm.

1163

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

2 x Suspension cables 3m
NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
Diffuser
Cover Kit
Connection Box (CB09.32)

new

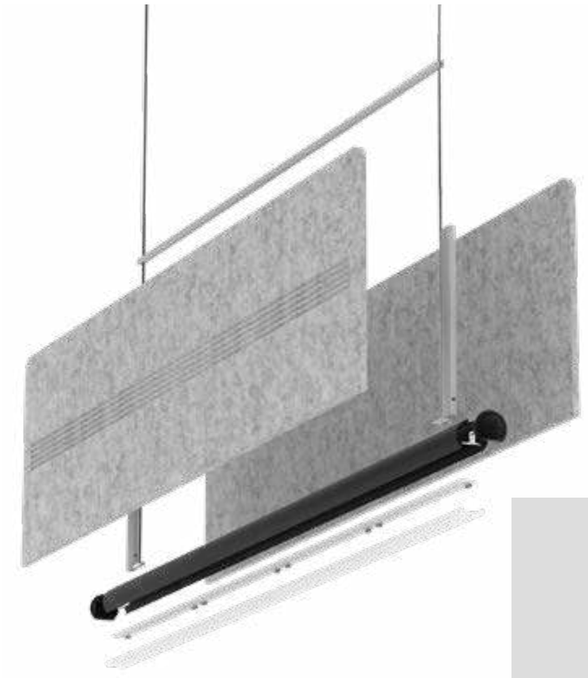

ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Special Color Temperature
RGB
TW
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

.PN

PENDANT

ACOUSTIC LINGGO MINI

REF 230007.PN

REF.	DIMENSION ⬟	FINISH ●		DIFFUSER ■	POWER	CRI	DOWNLIGHT * | LUMEN .27	.30	.40	WATT K	DIMM ▼
230007	**.01** 1163mm	**.50** **.51**	**WH** **BK**	**.OP** **.MP**	**.ST**	**.9**	3060	3180	3300	24	**.DA** **.PU** **.D1**

Reference order | ⬟ ● ■ ▼

230007.01.PN.XX-XX.XX.ST.9.XX.XX

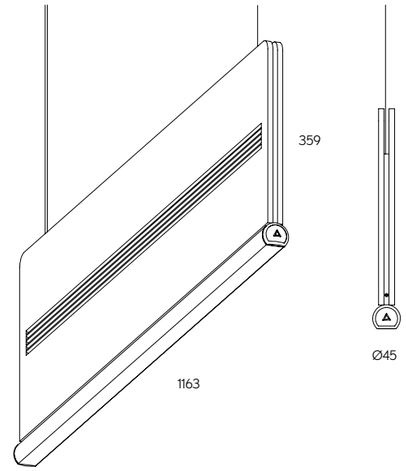

* Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

- Select Acoustic finishes



.50 .51

- Select Profile finishes

WH BK

ACOUSTIC LINGGO MINI

REF 230007.PN

ACOUSTIC PROPERTIES

ENVIRONMENTAL:	Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1. Standards
FIRE TEST:	Classification B-s1, d0 and CTEDB-SI Compliant
BAFFLE THIKNESS:	9mm
BABBLE DENSITY:	155Kg/m^3
SOUND ABSORBTION COEFFICIENT:	0,77 αw

PHOTOMETRY

OPAL

INCLUDED



CB09.32
CONNECTION BOX

SC03.SA
WIRE 3M.

COVER KIT

PROFILE



FINISHES

● ACOUSTIC COLORS

● PROFILE COLORS

DIMENSIONS

⬟ LENGTHS mm.

1170

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN
2 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN: 1 x Feed Hose 5 x 0,75mm²
Diffuser
Cover Kit
Connection Box CB09.12
.SR
Surface mouting kit

new

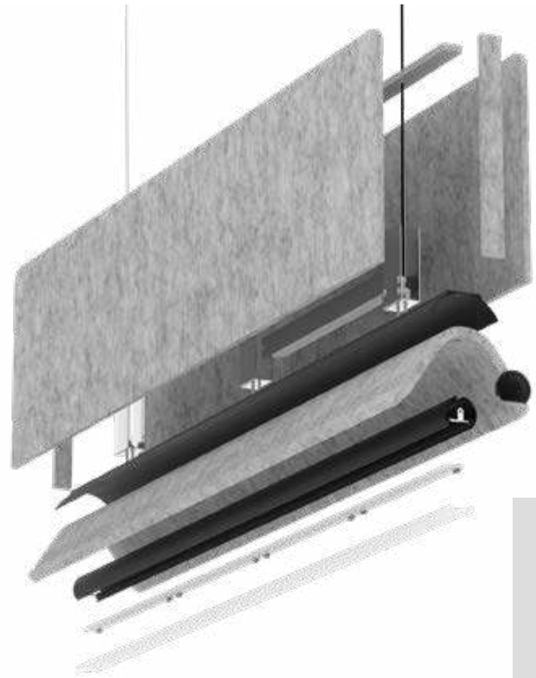



ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Special Color Temperature
RGB
TW
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

ACOUSTIC LAMBDA

REF 230001.PN | 230001.SR

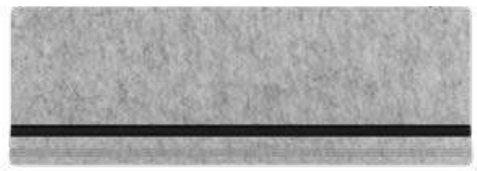

REF.	DIMENSION ⬟	FINISH ●		DIFFUSER ■	POWER	CRI	DOWNLIGHT * | LUMEN .27	.30	.40	WATT	DIMM ▼
230001	**.01** 1170mm	**.50** **.51** **.52**	**WH** **BK**	**.OP** **.MP**	**.ST**	**.9**	3060	3180	3300	24	**.DA** **.PU** **.D1**

Reference order | ⬟ 230001.01 | .SR .PN | ● .XX-XX.XX.ST | ■ .9.XX | ▼ .XX



.PN



.SR

* Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

- Select Acoustic finishes

.50 .51 .52

- Select Profile finishes

.WH .BK

ACOUSTIC LAMBDA

REF 230001.PN | 230001.SR

ACOUSTIC PROPERTIES

ENVIRONMENTAL:	Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1. Standards
FIRE TEST:	Classification B-s1, d0 and CTEDB-SI Compliant
BAFFLE THIKNESS:	9mm
BABBLE DENSITY:	155Kg/m³
SOUND ABSORBTION COEFFICIENT:	0,77 αw

INCLUDED (.SR)



CB CB09.32
CONNECTION BOX

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED (.PN)



CB09.12
CONNECTION BOX

SC03.SA
WIRE 3M.

COVER KIT

PROFILE



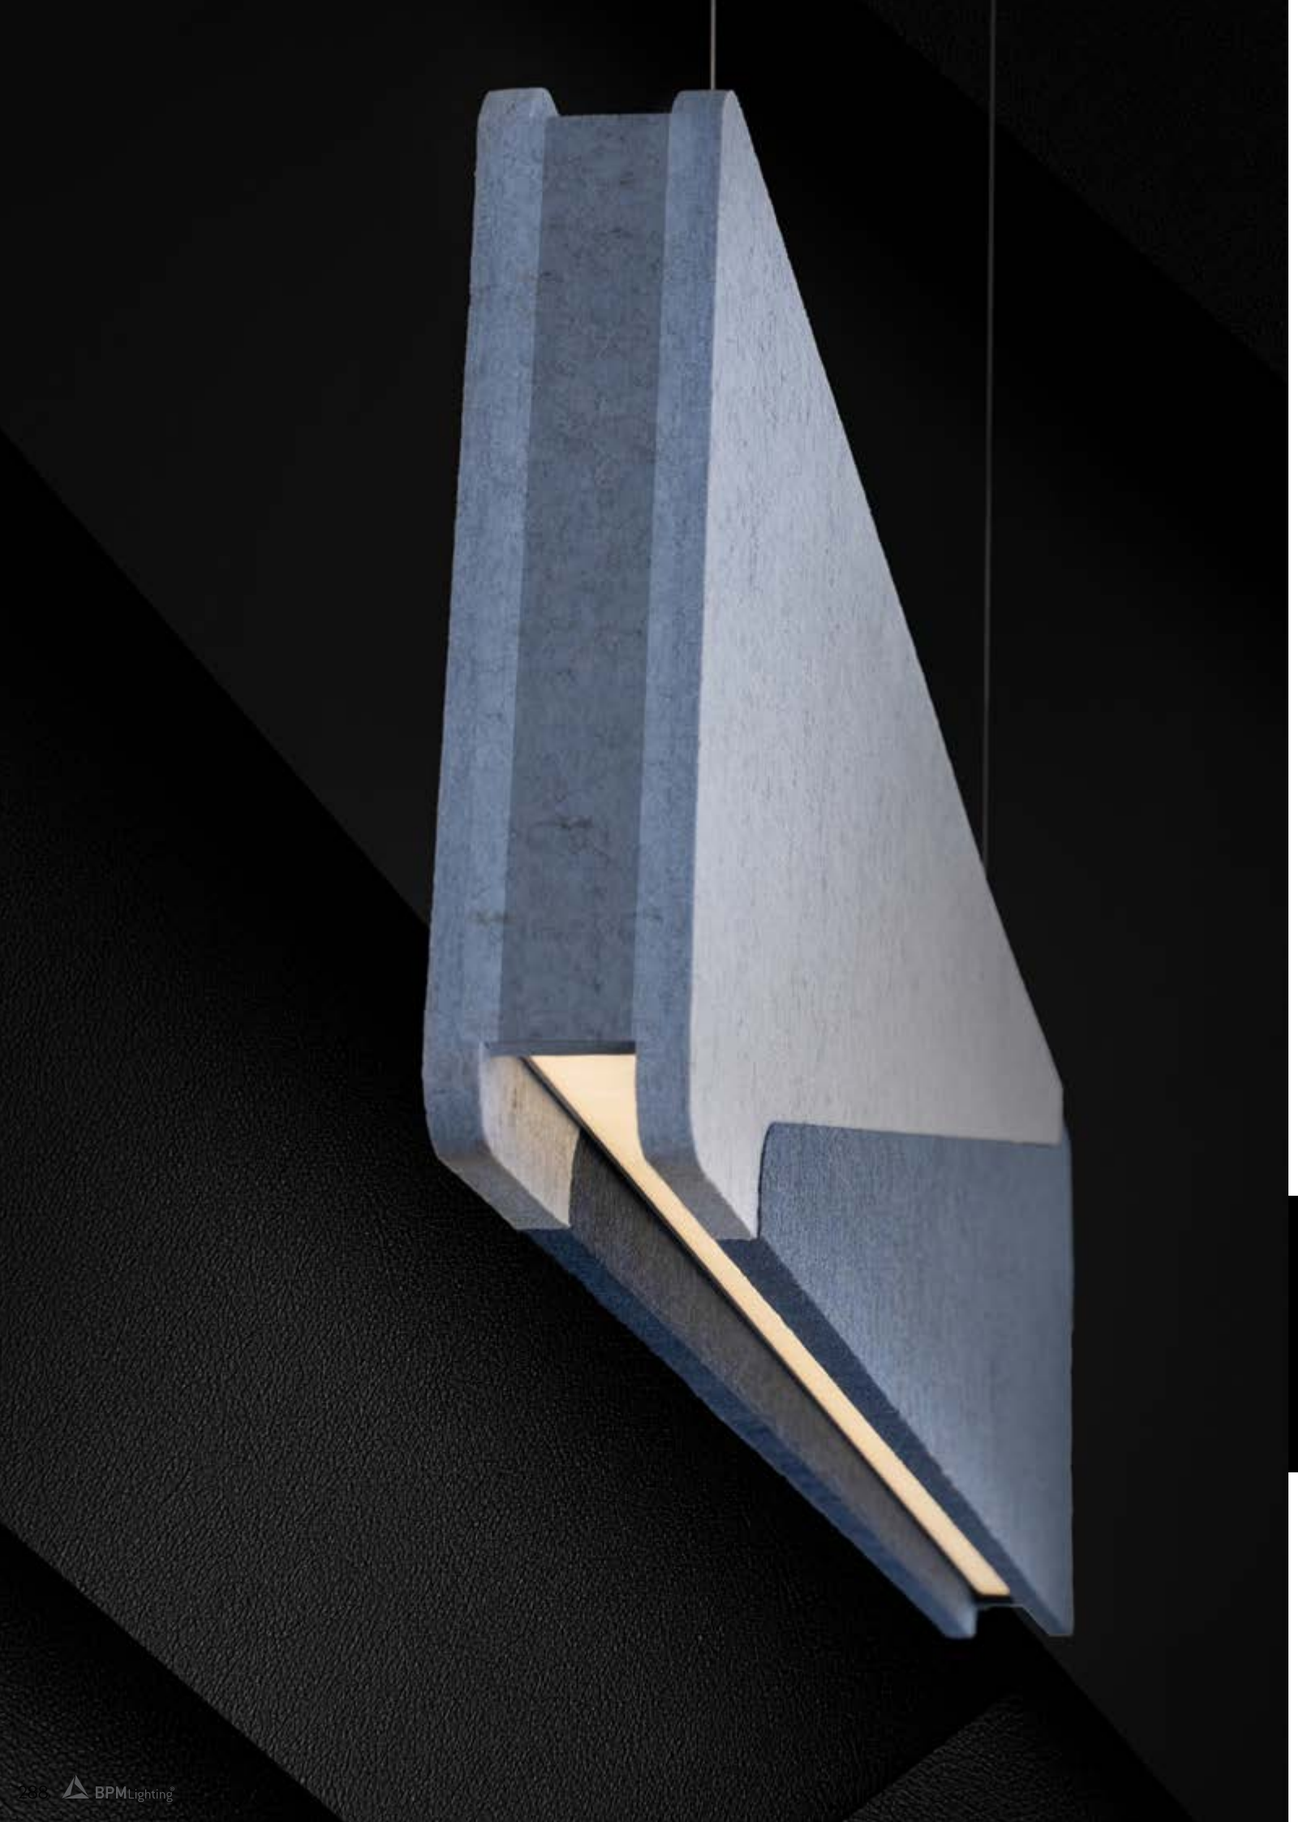

FINISHES

● ACOUSTIC COLORS

● PROFILE COLORS

DIMENSIONS

⬟ LENGTHS mm.

1190

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

2 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN: 1 x Feed Hose 5 x 0,75mm²
Diffuser
Cover Kit
Connection Box CB09.12

new

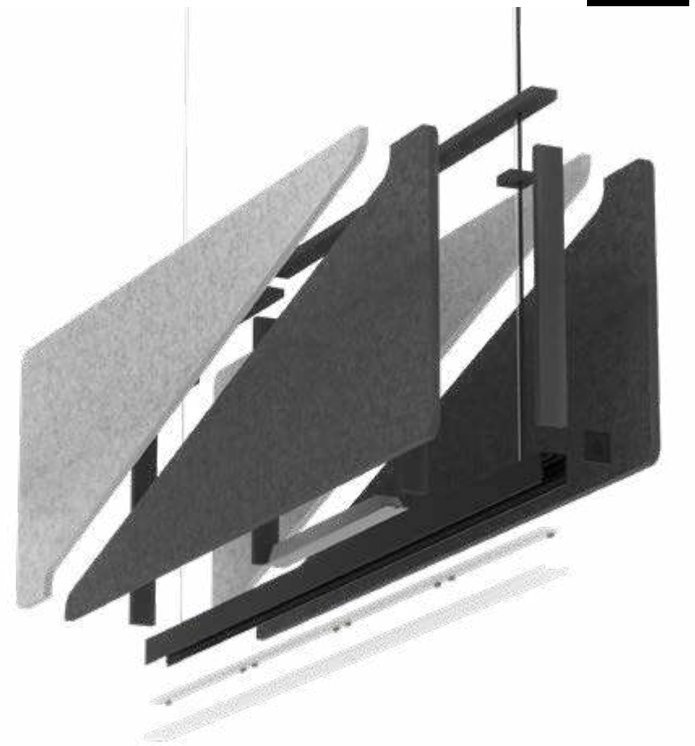

ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Special Color Temperature
RGB
TW
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

ACOUSTIC
ALBA MINI

REF 230008.PN

REF.	DIMENSION ⬟	FINISH ●		DIFFUSER ■	POWER	CRI	DOWNLIGHT * | LUMEN .27	.30	.40	WATT	DIMM ▼
230008	**.01** 1190mm	**.50-51** **.53-54** **.50-53**	**WH** **BK**	**.OP** **.MP**	**.ST**	**.9**	3060	3180	3300	24	**.DA** **.PU** **.D1**

Reference order | 230008.01.PN.XX-XX.XX.ST.9.XX.XX

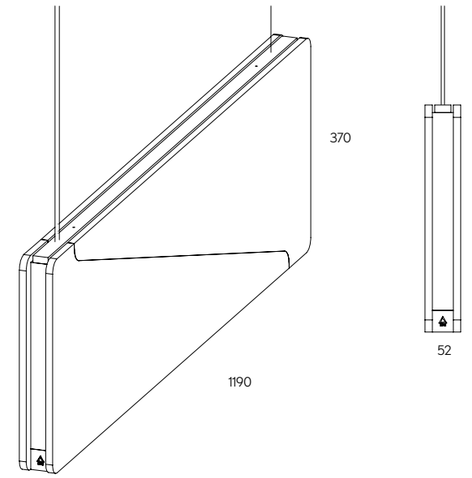

* Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

.PN

PENDANT

- Select acoustic finishes

.50-51 .53-54 .50-53

- Select profile finishes

.WH .BK

ACOUSTIC ALBA MINI

REF 230008.PN

ACOUSTIC PROPERTIES

ENVIRONMENTAL:	Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1. Standards
FIRE TEST:	Classification B-s1, d0 and CTEDB-SI Compliant
BAFFLE THIKNESS:	9 mm
BABBLE DENSITY:	190Kg/m^3
SOUND ABSORBTION COEFFICIENT:	0,92 αw

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED



CB09.12 CONNECTION BOX SC03.SA WIRE 3M. COVER KIT

PROFILE



FINISHES

● ACOUSTIC COLORS

● PROFILE COLORS

DIMENSIONS

⬟ LENGTHS MM.

1190

COMPONENTS

SLIM PATRICIA
SLIM LED BALL
SLIM TUBE
SLIM WALL WASHER
SLIM LENSES
SLIM MOTION LENSES
SLIM LED MODULES

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Suspension cables
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN: 1 x Feed Hose 5 x 0,75mm²
Cover Kit
Connection Box CB09.12

new

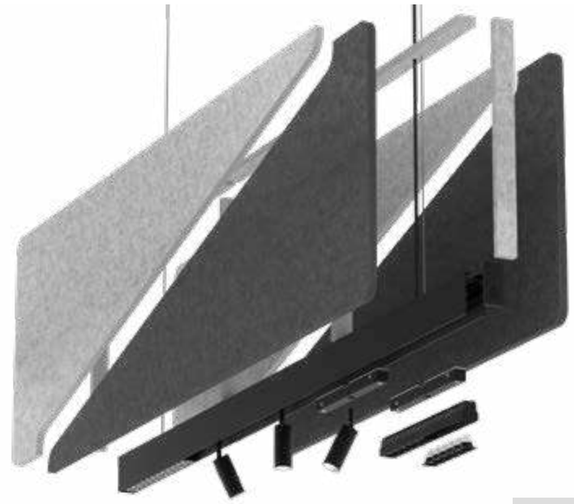

.PN

PENDANT

ACOUSTIC ALARIK SLIM

REF 230009.PN

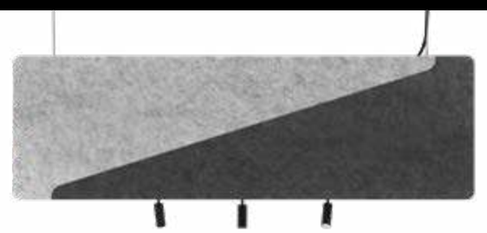

ALARIK SLIM	REF.	DIMEN-SION ⬟	FINISH ●	SKETCH
	230009	.01 1190mm.	●	

Reference order | 230009.XX.PN.XX-XX-XX

48V TRANSFORMER	DIMENSION ⬟	WATT
DR48	.01	75

Reference order | DR48.XX

POWER FEEDER UNIT	FINISH ●
	.BK-BK .WH-WH

ACC230009.CA.XX

SLIM PATRICIA	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11544	.01	●	.15 .38 .60	.ST	.9	.27	576	8	48	.DA .D1	
							.30	607				
							.40	695				
	11544	.02	●	.15 .38 .60	.ST	.9	.27	1173	15	48	.DA .D1	
							.30	1181				
							.40	1207				

Reference order | 11544.XX.XX.XX.ST.9.XX.XX

SLIM PATRICIA ZOOM	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11546	.01	●	.15-36 .36-60	.ST	.9	.27	2038	25	48	.DA .D1	
							.30	2254				
							.40	2320				

Reference order | 11546.01.XX.XX.ST.9.XX.XX

SLIM LED BALL	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11551	.01	●	.37	.ST	.9	.27	355	8	48	.DA .D1	
							.30	357				
							.40	396				

Reference order | 11551.01.XX.XX.ST.9.XX.XX

SLIM LED TUBE 20	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11553	.01	●	.20 .40	.ST	.9	.27	174	3	48	.DA .D1	
							.30	187				
							.40	212				

Reference order | 11553.01.XX.XX.ST.9.XX.XX

SLIM LED TUBE 40	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11552	.01	●	.20 .40	.ST	.9	.27	808	14	48	.DA .D1	
							.30	820				
							.40	881				

Reference order | 11552.01.XX.XX.ST.9.XX.XX

SLIM WALL WASHER	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11550	.01	.BK-BK	-	.ST	.9	.27	882	15	48	.DA .D1	
							.30	1013				
							.40	1107				

Reference order | 11550.01.XX.XX.ST.9.XX.XX

SLIM LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11548	.01	.BK-BK	.15 .38	.ST	.9	.27	660	8	48	.DA .D1	
							.30	750				
							.40	827				
	11548	.02	.BK-BK	.15 .38	.ST	.9	.27	1320	15	48	.DA .D1	
							.30	1511				
							.40	1654				

Reference order | 11548.XX.XX.XX.ST.9.XX.XX

- Select Acoustic finishes

- Select Profile finishes

ACOUSTIC ALARIK SLIM

REF 230009.PN

PHOTOMETRY

PATRICIA

SLIM LED BALL

LENSES

LED MODULES



INCLUDED



PROFILE



SLIM MOTION LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11547	**.01**	**.BK-BK**	**.15** **.38**	**.ST**	**.9**	**.27**	660	8	**48**	**.DA** **.D1**	
							.30	750				
							.40	827				

Reference order | 11547.01.XX.XX.ST.9.XX.XX

SLIM LED MODULES	REF.	DIMEN-SION ⬟	FINISH ●	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11549	**.01**	**.BK-BK**	**.OP**	**.ST**	**.9**	**.27**	558	9	48	**.DA** **.D1**	
							.30	560				
							.40	604				
	11549	**.02**	**.BK-BK**	**.OP**	**.ST**	**.9**	**.27**	1115	18	48	**.DA** **.D1**	
							.30	1120				
							.40	1208				
	11549	**.03**	**.BK-BK**	**.OP**	**.ST**	**.9**	**.27**	1670	24	48	**.DA** **.D1**	
							.30	1680				
							.40	1812				

Reference order | 11549.XX.XX.XX.ST.9.XX.XX

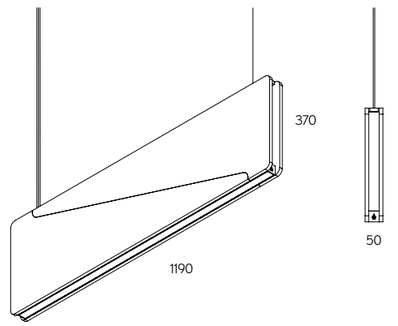

.PN

PENDANT

- Select Acoustic finishes

.50-51 .53-54 .53-50

- Select Profile finishes

WH BK



ACOUSTIC ALARIK SLIM

REF 230009.PN

ACOUSTIC PROPERTIES

ENVIRONMENTAL:	Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1. Standards
FIRE TEST:	Classification B-s1, d0 and CTEDB-SI Compliant
BAFFLE THIKNESS:	9mm
BABBLE DENSITY:	190 Kg/m^3
SOUND ABSORBTION COEFFICIENT:	0,92 αw

PHOTOMETRY

LED MODULES



OPAL MICROPRISMATIC

INCLUDED



CB09.12 CONNECTION BOX SC03.SA WIRE 3M. COVER KIT

PROFILE



FINISHES

● PROFILE COLORS

● LED MODULE COLORS

ACOUSTIC COLORS

LED MODULE COLORS

DIMENSIONS

⬟ LENGTHS mm.

1000

LIGHTING OPTIONS

■ BEAM OPTIONS

20º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

2 x Suspension cables 3m
Connection Box
Cover Kit

new

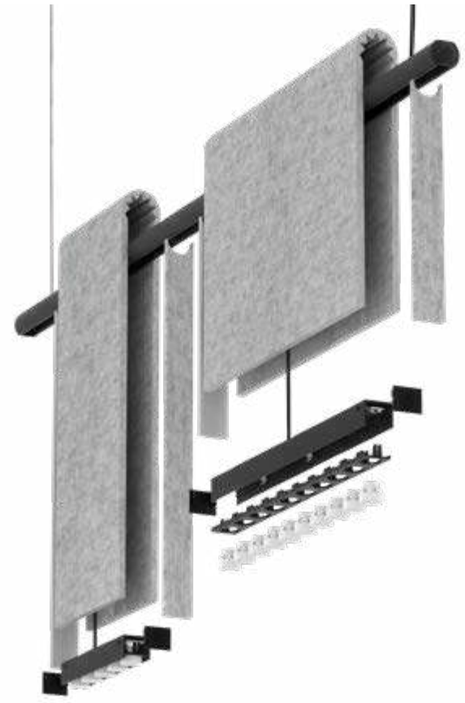

48V. REMOTE

PENDANT .PN

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06 | IP40 | LIFE 50000H | DIM OPTIONAL | 48V. REMOTE | INDOOR | 220-240 V 50-60 Hz | CE

ACOUSTIC OKKO

REF 230003.PN

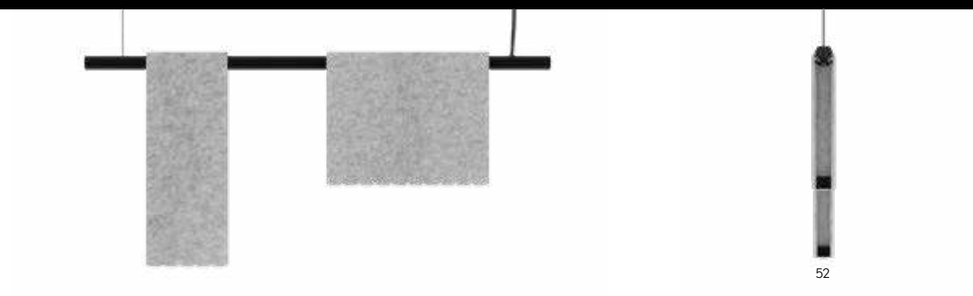

REFERENCE ORDER EXAMPLE | *EJEMPLO DE REFERENCIA*

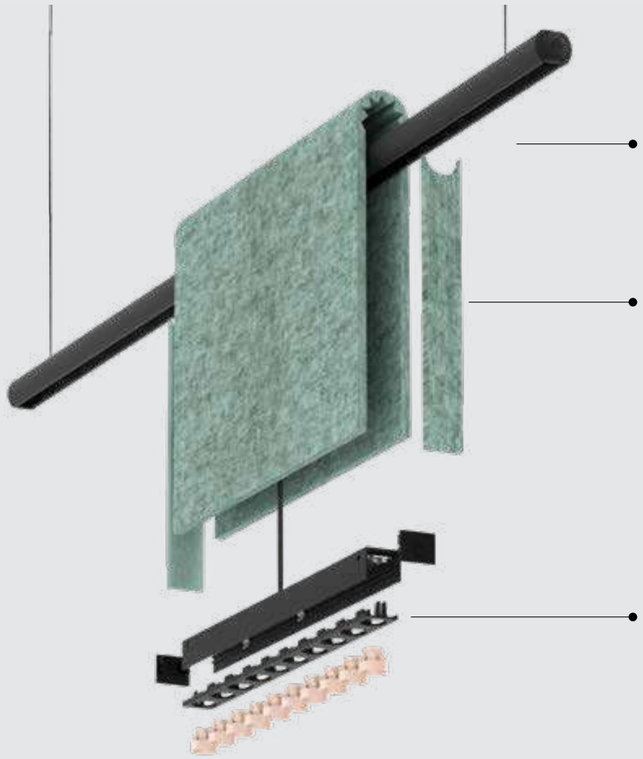

ACOUSTIC OKKO LINE PROFILE
PROFILE FINISH

ACOUSTIC OKKO LED MODULE
ACOUSTIC FINISH

ACOUSTIC OKKO LED MODULE
LED MODULE FINISH

ACOUSTIC OKKO LINE PROFILE

Reference order | 230003.01.PN.BK-BK

ACOUSTIC OKKO LED MODULES

Reference order | 140002.01.55-BK-CR.XX.ST.9.XX.XX

ACOUSTIC OKKO LINE	REF.	DIM ⬟	FINISH ●
	230003	.01 1000mm	.WH-WH .BK-BK

Reference order | 230003.01.PN.XX

48V TRANSF	DIMENSION ⬟	WATT
DR210012	.01	75
	.02	120
	.03	200

Ref. order | DR210012.XX

LINEAR JOINT


Ref. order | UR20

POWER FEEDER UNIT	FINISH ●
	.BK-BK .WH-WH

ACC230003.CA.XX

ACOUSTIC OKKO LED MODULES	REF.	DIMENSION ⬟	FINISH ●		OPTIC OPTIONS ■	POWER	CRI	LUMEN .27	LUMEN .30	LUMEN .40	WATT	mA	DIMM ▼	SKETCH
	140001	.01	.50 .51 .55	●	.20 .40 .60	.ST	.9	552	623	660	6	500	.DA .D1	
		.02												

Reference order | 140001.XX.XX-XX.XX.ST.9.XX.XX

ACOUSTIC OKKO LED MODULES	REF.	DIMENSION ⬟	FINISH ●		OPTIC OPTIONS ■	POWER	CRI	LUMEN .27	LUMEN .30	LUMEN .40	WATT	mA	DIMM ▼	SKETCH
	140002	.01	.50 .51 .55	●	.20 .40 .60	.ST	.9	1114	1245	1320	12	500	.DA .D1	
		.02												

Reference order | 140002.XX.XX-XX.XX.ST.9.XX.XX

- Select acoustic finishes



- Select LED modules finishes

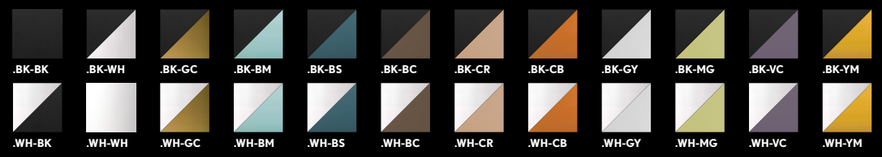

ACOUSTIC OKKO

REF 230003.PN

ACOUSTIC PROPERTIES

ENVIRONMENTAL:	Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1. Standards
FIRE TEST:	Classification B-s1, d0 and CTEDB-SI Compliant
BAFFLE THIKNESS:	9 mm
BABBLE DENSITY:	155Kg/m^3
SOUND ABSORBTION COEFFICIENT:	0,77 αw

PHOTOMETRY

20º 40º 60º

INCLUDED



CB0912 CONNECTION BOX | SC03.SA WIRE 3M. | COVER KIT

PROFILE



new

FINISHES

● ACOUSTIC COLORS

● PROFILE COLORS

DIMENSIONS

⬟ DIAMETERS mm. | HEIGHT 50mm.

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

SILICONE

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

3 x Suspension cables 3m
1 x Feed Hose 3 x 0,75mm² (.125 1 Feed Hose 5 x 0,75mm²)
Electric system
Connection Box CB03 + Driver Box CB04.OP
Cover Kit

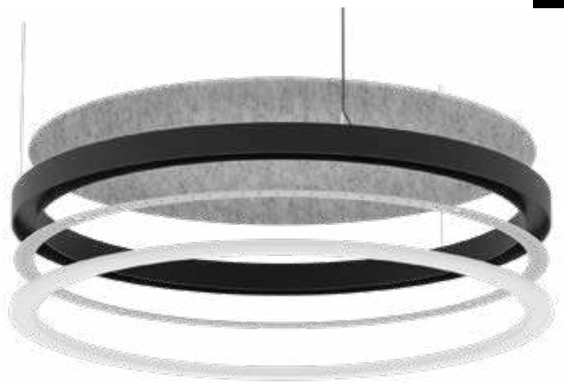



REMOTE

ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Tunable White
RGB
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

.PN

PENDANT

ACOUSTIC
ALBERTA SOFT

REF 230010.PN

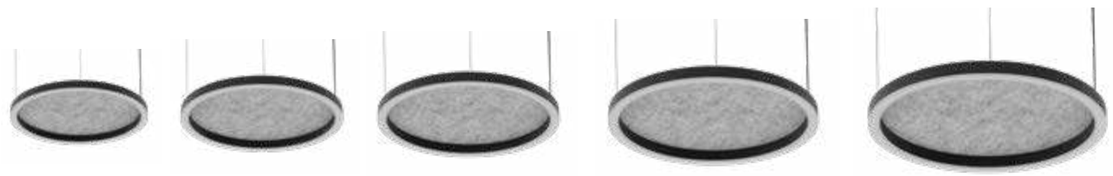

Ø350mm | Ø450mm | Ø650mm | Ø950mm | Ø1250mm

50

ALBERTA SOFT	REF.	DIMENSION ⬟	FINISH ●		DIFFUSER ■	POWER	CRI	LUMEN .27	LUMEN .30	LUMEN .40	WATT	mA	DIMM ▼	SKETCH
	230010	.35	.50 .51	WH BK	.SI	.ST	.9	5280	5316	5844	56	700	.DA .PU .D1	
	230010	.45	.50 .51	WH BK	.SI	.ST	.9	7086	7121	7747	70	700	.DA .PU .D1	
	230010	.65	.50 .51	WH BK	.SI	.ST	.9	8785	9040	9687	86	700	.DA .PU .D1	
	230010	.95	.50 .51	WH BK	.SI	.ST	.9	13298	13519	14703	129	700	.DA .PU .D1	
	230010	.125	.50 .51	WH BK	.SI	.ST	.9	17816	18135	18118	172	700	.DA .PU .D1	

Reference order | 230010.XX.PN.XX-XX.XX.ST.9.XX.XX

DRIVER BOX NON-DIMM		DRIVER BOX DIMMABLE		FINISH
				●
CB09.32	CB08.30	CB09.40	CB08.38	

Reference order | CB09.XX.XX

.PN

PENDANT

- Select Acoustic finishes



.50 .51

- Select Profile finishes

.WH .BK

ACOUSTIC ALBERTA SOFT

REF 230010.PN

ACOUSTIC PROPERTIES

ENVIRONMENTAL:	Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1. Standards
FIRE TEST:	Classification B-s1, d0 and CTEDB-SI Compliant
BAFFLE THIKNESS:	12 mm
BABBLE DENSITY:	190Kg/m^3
SOUND ABSORBTION COEFFICIENT:	0,92 αw

PHOTOMETRY



SILICONE

INCLUDED

CB03
CONNECTION BOX



CB04.OP
DRIVER BOX

SC03.SA
WIRE 3M.

PROFILE



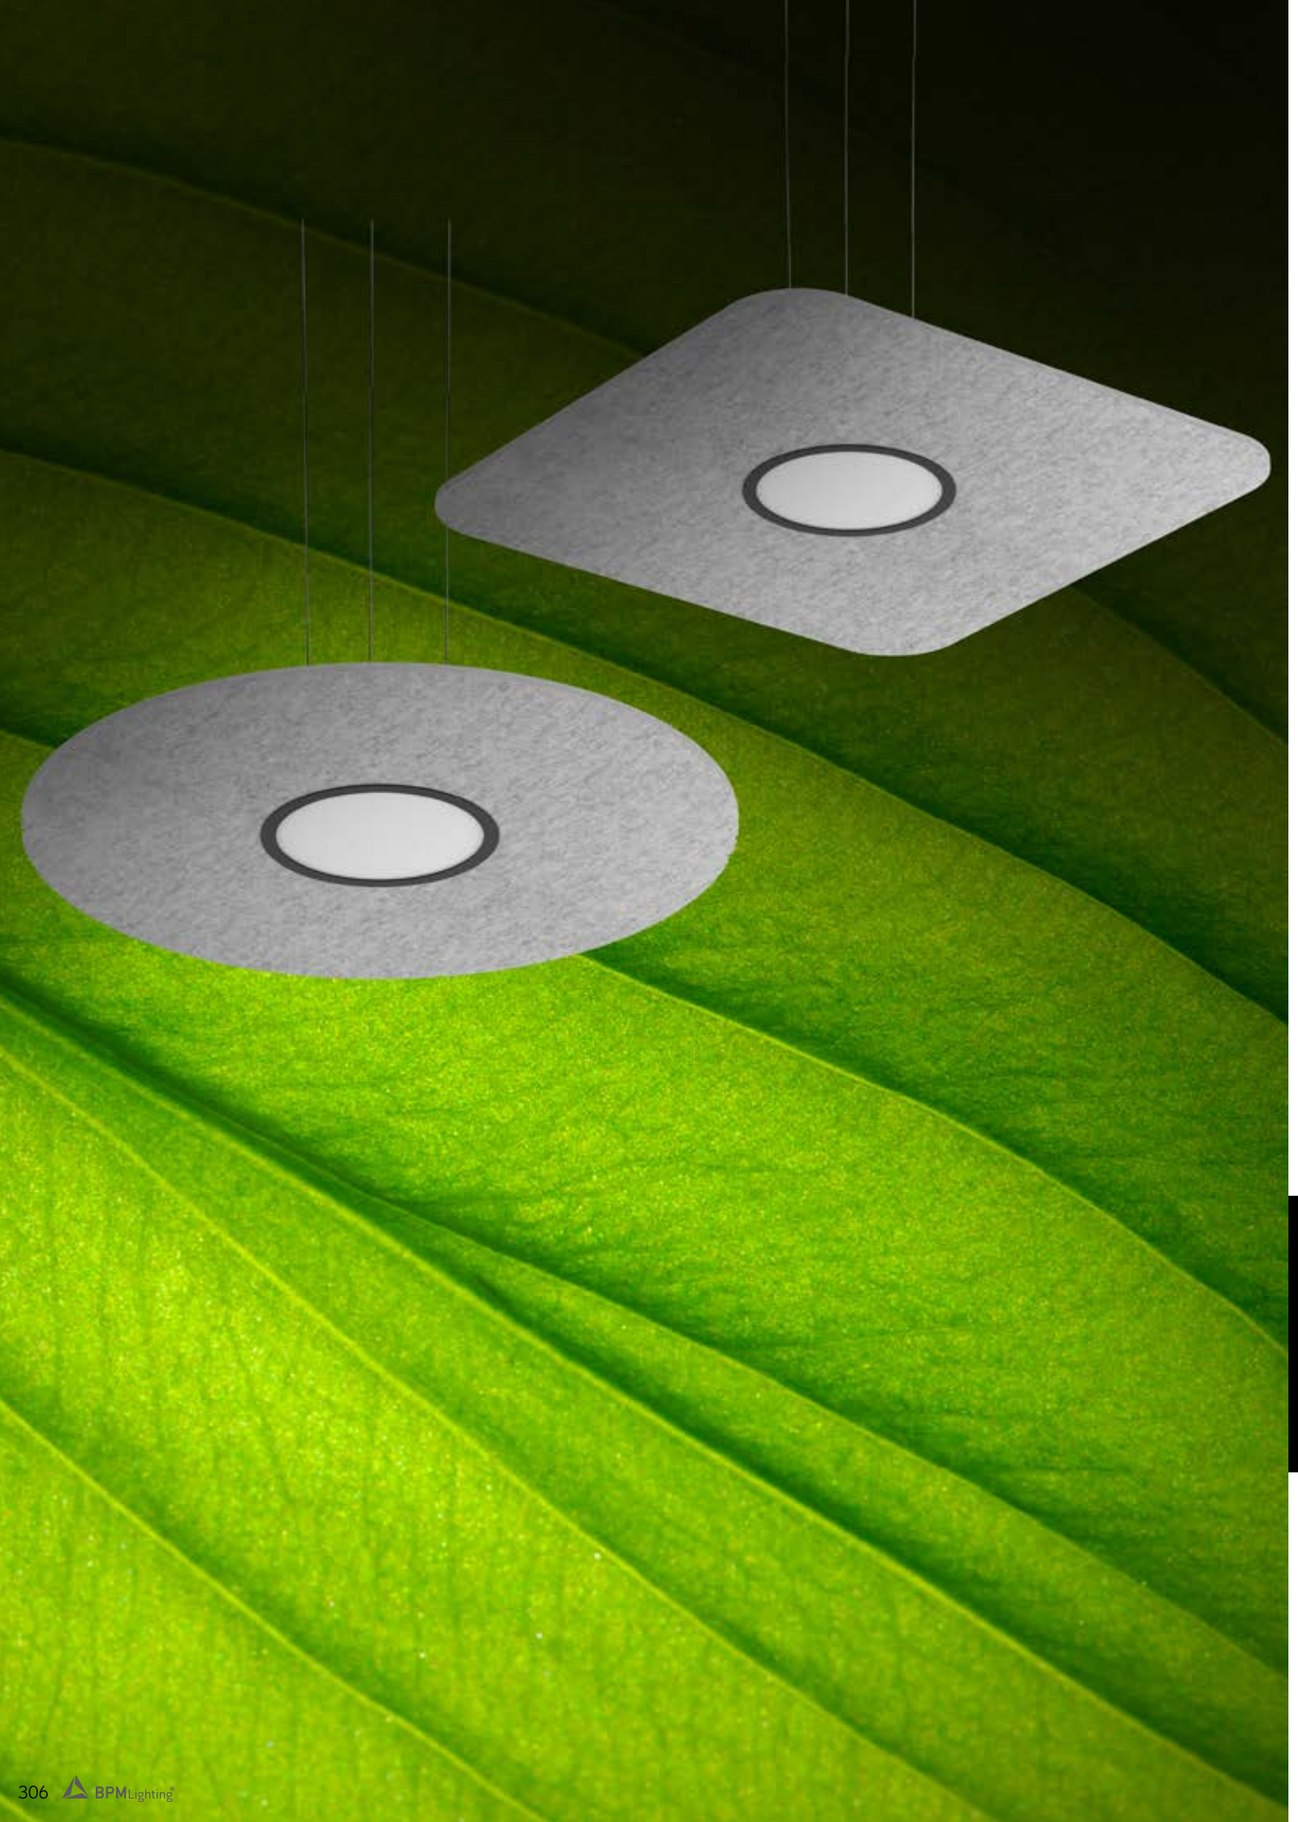

FINISHES

- **ACOUSTIC COLORS**

- **PROFILE COLORS**

DIMENSIONS

- **mm.**

800 | 1000 | 1200

LIGHTING OPTIONS

- **DIFFUSERS**

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

- **DIMMABLE OPTIONS**

DALI | 1.10 | PUSH

- **LIGHT DISTRIBUTION**

DOWN

LUMINAIRE INCLUDES

3 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN: 1 x Feed Hose 5 x 0,75mm²
Connection box CB03 with luminaire's finish

new

ON DEMAND

Special RAL Color
Special Color Temperature
Emergency Lighting*
Motion Detection
RGB
CRI 80
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

.PN

PENDANT

ACOUSTIC RD | SQ
ALABAMA

REF 460001.PN | 460003.PN

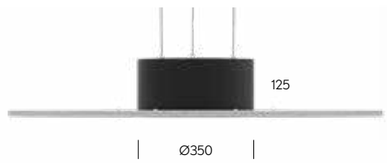

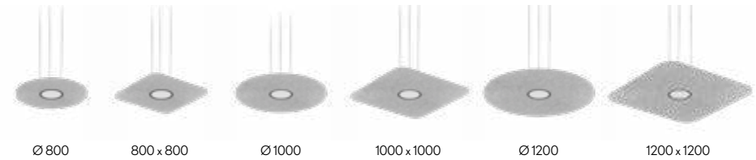

ALABAMA RD	REF.	DIMENSION ⬟	FINISH		DIFFUSER ■	POWER	CRI	LUMEN .27	LUMEN .30	LUMEN .40	WATT	mA	DIMM ▼	SKETCH
	460001	.01	●	WH BK	.OP	.ST	.9	-	2385	2475	18	500	.DA .PU .D1	Ø800
		.02												Ø1000
		.03												 Ø1200

Reference order | 460001.XX.PN.XX-XX.XX.XX.X.XX.XX

ALABAMA SQ	REF.	DIMENSION ⬟	FINISH		DIFFUSER ■	POWER	CRI	LUMEN .27	LUMEN .30	LUMEN .40	WATT	mA	DIMM ▼	SKETCH
	460003	.01	●	WH BK	.OP	.ST	.9	-	2385	2475	18	500	.DA .PU .D1	800 800
		.02												1000 1000
		.03												1200 1200

Reference order | 460003.XX.PN.XX-XX.XX.XX.X.XX.XX







.PN

PENDANT

- Select Acoustic finishes

- Select Profile finishes

ACOUSTIC RD | SQ
ALABAMA

REF 460001.PN | 460003.PN

ACOUSTIC PROPERTIES

ENVIRONMENTAL:	Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1. Standards
FIRE TEST:	Classification B-s1, d0 and CTEDB-SI Compliant
BAFFLE THIKNESS:	12 mm
BABBLE DENSITY:	190 Kg/m^3
SOUND ABSORBTION COEFFICIENT:	0,92 αw

PHOTOMETRY

OPAL

INCLUDED



CB03
CONNECTION BOX

SC03.SA
WIRE 3M.

PROFILE

FINISHES

● ACOUSTIC COLORS

● SPOTLIGHT COLORS

DIMENSIONS

⬟ DIAMETERS mm

800 | 1000 | 1200

LIGHTING OPTIONS

■ BEAM ANGLE

15º 25º 38º 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

3 x Suspension cables 3m
1 x Feed Hose 3 x 0,75mm²
Connection box CB03 BK or WH finish

new



ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options (Casambi)

* Accesories are delivered separately (not installed in luminaire).

.PN

PENDANT

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06 | IP40 | LIFE 50000H | DIM OPTIONAL | | REMOTE | INDOOR | 220-240 V 50-60 Hz | CE

ACOUSTIC RD | SQ
KLIMT FIX

REF 460002.PN | 460004.PN

Ø100

Ø800 | 800 x 800 | Ø1000 | 1000 x 1000 | Ø1200 | 1200 x 1200

ROUND

SQUARE

KIMT FIX RD	REF.	DIMENSION ⬟	FINISH		OPTIC OPTIONS ■	POWER	CRI	LUMEN .27	LUMEN .30	LUMEN .40	WATT	mA	DIMM ▼	SKETCH
	460002	.01	●	WH-WH BK-BK BK-GD WH-GD	.15 .25 .38 .60	.ST	.9	803	983	991	11	500	.DA .PU .D1	
		.02												
		.03												

Reference order | 460002.XX.PN.XX-XX.XX.XX.X.XX.XX

KLIMT FIX SQ	REF.	DIMENSION ⬟	FINISH		OPTIC OPTIONS ■	POWER	CRI	LUMEN .27	LUMEN .30	LUMEN .40	WATT	mA	DIMM ▼	SKETCH
	460004	.01	●	WH-WH BK-BK BK-GD WH-GD	.15 .25 .38 .60	.ST	.9	803	983	991	11	500	.DA .PU .D1	
		.02												
		.03												

Reference order | 460004.XX.PN.XX-XX.XX.XX.X.XX.XX

.PN

PENDANT

- Select Acoustic finishes

- Select Spotlight finishes

ACOUSTIC RD | SQ
KLIMT FIX

REF 460002.PN | 460004.PN

ACOUSTIC PROPERTIES

ENVIRONMENTAL:	Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1. Standards
FIRE TEST:	Classification B-s1, d0 and CTEDB-SI Compliant
BAFFLE THIKNESS:	12 mm
BABBLE DENSITY:	190 Kg/m^3
SOUND ABSORBTION COEFFICIENT:	0,92 αw

PHOTOMETRY

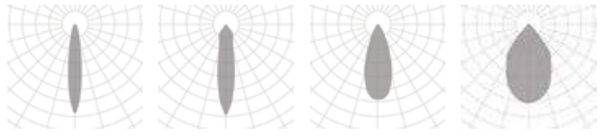

INCLUDED



CB03
CONNECTION BOX

SC03.SA
WIRE 3M.

FINISHES

- ACOUSTIC COLORS

DIMENSIONS

- SIZES mm.

Ø800	Ø1000	Ø1200
800x800	1000x1000	1200x1200

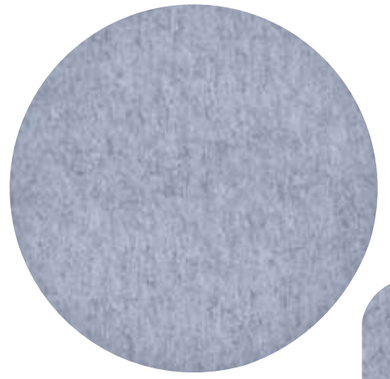

.SR



.SR

.PN

.PN

RD PANEL	REF.	DIMENSION ⬟	FINISH	SKETCH
	AC.RD	.01	●	Ø800
		.02		Ø1000
		.03		Ø1200

Reference order AC.RD.XX | .SR .PN | .XX

SQ PANEL	REF.	DIMENSION ⬟	FINISH	SKETCH
	AC.SQ	.01	●	800x800
		.02		1000x1000
		.03		1200x1200

Reference order AC.SQ.XX | .SR .PN | .XX

PENDANT | SURFACE

ACOUSTIC ACCESORIES
RD | SQ PANEL

REF AC.RD | AC.SQ

ACOUSTIC PROPERTIES

ENVIRONMENTAL:	Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1. Standards
FIRE TEST:	Classification B-s1, d0 and CTEDB-SI Compliant
BAFFLE THIKNESS:	12 mm
BABBLE DENSITY:	190 Kg/m^3
SOUND ABSORBTION COEFFICIENT:	0,92 αw

Select Acoustic finishes

.61 .60 .55 .53 .54 .57 .51 .50 .56 .52

FINISHES

- ACOUSTIC COLORS

DIMENSIONS

- SIZES mm

2400x300	2400x600

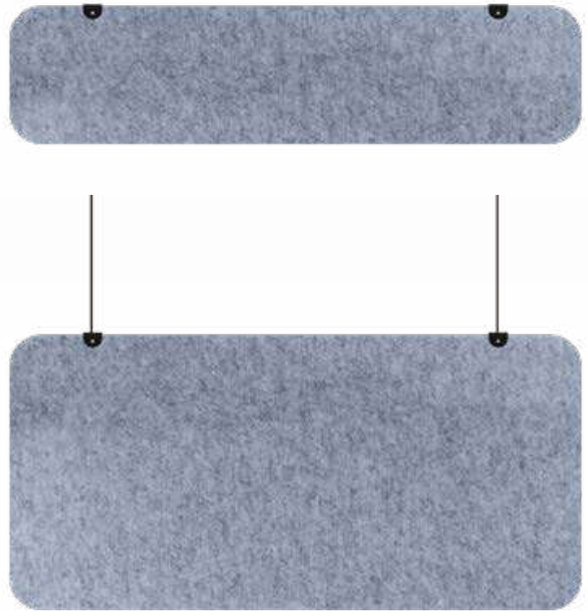

.PN

.SR

RD PANEL	REF.	DIMENSION	FINISH	SKETCH
	AC.VT	.01	●	300 / 2400
		.02		600 / 2400

Reference order | AC.VT.XX | .SR .PN | .XX

.SR
.PN
PENDANT | SURFACE

ACOUSTIC ACCESORIES
VT PANEL

REF AC.VT

ACOUSTIC PROPERTIES

ENVIRONMENTAL:	Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1. Standards
FIRE TEST:	Classification B-s1, d0 and CTEDB-SI Compliant
BAFFLE THIKNESS:	12 mm
BABBLE DENSITY:	190 Kg/m^3
SOUND ABSORBTION COEFFICIENT:	0,92 αw

Select Acoustic finishes

.61 .60 .55 .53 .54 .57 .51 .50 .56 .52

FINISHES

- COLORS

DIMENSIONS

- SIZES mm.

600x600 | 1200x600

new

RD PANEL	REF.	DIMENSION ⬟	FINISH	SKETCH
	AC.MD	.01	●	600 × 600
		.02		600 × 1200

Reference order | AC.MD.XX.RF.XX

RECESSED FRAME

.RF

ACOUSTIC ACCESORIES
MD PANEL

REF AC.MD.RF

ACOUSTIC PROPERTIES

ENVIRONMENTAL:	Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1. Standards
FIRE TEST:	Classification B-s1, d0 and CTEDB-SI Compliant
BAFFLE THIKNESS:	12 mm
BABBLE DENSITY:	190 Kg/m^3
SOUND ABSORBTION COEFFICIENT:	0,92 αw

Select Acoustic finishes

.61 .60 .55 .53 .54 .57 .51 .50 .56 .52

Avant-garde design

With flair and imagination, some products offer boundless possibilities. Our Tech lights bring you to a journey of simple designs that enhance every project and adapt to every need: Klimt, Martorell, Cube, among others...

Estética vanguardista

Con estilo e imaginación, algunos productos ofrecen grandes posibilidades. Esta colección te invita a un viaje de diseños sencillos que realzan cada proyecto y se adaptan a cada necesidad: Klimt, Martorell, Cube entre otros...

TECH

PENDANT | SURFACE

MARTORELL	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	20115	**.01** *2	●	**LED**	**.24** **.32**	**.ST**	**.9**	**.27**	175	3	700	**.DA** **.PU** **.D1**	85 Ø33
								.30	188				
								.40	199				
	20115	**.02**	●	**LED**	**.15** **.24** **.32**	**.ST**	**.9**	**.27**	470	8	700	**.DA** **.PU** **.D1**	 140 Ø40
								.30	498				
								.40	515				
	20115	**.03**	●	**LED**	**.15** **.24** **.32** **.60**	**.ST**	**.9**	**.27**	1071	12	350	**.DA** **.PU** **.D1**	 160 Ø60
								.30	1156				
								.40	1198				

Reference order | 20115.XX (⬟) .SR/.PN | .XX.XX (●) (■) .ST.9.XX (▼).XX

● Select finishes

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*
*2 Dimming options require the combination of a minimum of 2 luminaires. *Las opciones de regulación necesitan la combinación de un mínimo de 2 luminarias.*

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

15º | 24º | 32º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm (.02, .03)
Tunable White (.02, .03)
Honey Comb (.03)
Wireless Control Options
Special RAL Color

.SR
.PN
PENDANT | SURFACE

MARTORELL

REF 20115.PN | 20115.SR

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06 | IP20 | LIFE 50000H | DIM OPTIONAL | REMOTE | INDOOR | 220-240 V 50-60 Hz | CE

INSTALLATIONS

.PN
PENDANT
·20115 MARTORELL | PN
Pag. 322

.TK
TRACKLIGHT
·20115 MARTORELL | TK
Pag. 744

.SR
SURFACE
·20115 MARTORELL | SR
Pag. 322

.RF
RECESSED FRAME
·20115 MARTORELL | RF
Pag. 494

.TR
TRIMLESS
·20115 MARTORELL | TR
Pag. 676

PHOTOMETRY

MARTORELL MOVE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	20110	**.01**	●	**LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	167	3	700	**.DA .PU .D1**	
								.30	184				
								.40	206				
	20110	**.02**	●	**LED**	**.18 .25 .35**	**.ST**	**.9**	**.27**	465	9	700	**.DA .PU .D1**	
								.30	507				
								.40	548				
	20110	**.03**	●	**LED**	**.18 .25 .35**	**.ST**	**.9**	**.27**	1058	15	350	**.DA .PU .D1**	
								.30	1096				
								.40	1231				

Reference order ⬟ ● ■ ▼

20110.XX.SR.XX.XX.ST.9.XX.XX

● Select finishes

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

*2 Dimming options require the combination of a minimum of 2 luminaires. *Las opciones de regulación necesitan la combinación de un mínimo de 2 luminarias.*

● FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

18º | 20º | 25º | 35º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm (.02, .03)
Tunable White (.02, .03)
Honey Comb (.03)
Wireless Control Options

.SR

SURFACE

INSTALLATIONS

.SR
SURFACE

·20110 MARTORELL MOVE | SR
Pag. 324

.RF
RECESSED FRAME

·20110 MARTORELL MOVE | RF
Pag. 496

MARTORELL MOVE

REF 20110.SR

PHOTOMETRY

MARTORELL TUBE MOVE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	20138	.03	●	LED	.19 .24 .36	.ST	.9	.27	796	10	500	.DA .PU .D1	
								.30	841				
								.40	929				

Reference order | 20138.03.SR.XX.XX.ST.9.XX.XX

● Select finishes

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

19º | 24º | 36º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

INSTALLATIONS

MARTORELL
TUBE MOVE

REF 20138.SR

.SR
SURFACE

·20138 MARTORELL TUBE MOVE | SR
Pag. 326

.TK
TRACKLIGHT

·20138 MARTORELL TUBE MOVE | TK
Pag. 746

PHOTOMETRY

MARTORELL MINI CRATE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	20175	.01 *2	●	LED	.9 .16 .30	.ST	.9	.27	175	3	700	.DA .PU .D1	
								.30	188				
								.40	199				
	20175	.02	●	LED	.20 .40 .60	.ST	.9	.27	350	6	700	.DA .PU .D1	
								.30	276				
								.40	398				
	20175	.03	●	LED	.20 .40 .60	.ST	.9	.27	525	9	700	.DA .PU .D1	
								.30	564				
								.40	597				

Reference order ⬟ ● ■ ▼

20175.XX.SR.XX.XX.ST.9.XX.XX

● Select external-internal finishes

BK-BK

WH-WH

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

*2 Dimming options require the combination of a minimum of 2 luminaires. *Las opciones de regulación necesitan la combinación de un mínimo de 2 luminarias.*

• FINISHES

COLOR

□ ■

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

9º | 16º | 20º | 30º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Wireless Control Options

.SR

SURFACE

INSTALLATIONS

.SR
SURFACE

·20175 MARTORELL MINI CRATE | SR
Pag. 328

.RF
RECESSED FRAME

·20175 MARTORELL MINI CRATE | RF
Pag. 502

MARTORELL
MINI CRATE

REF 20175.SR

PHOTOMETRY

9º 16º 20º 30º 40º 60º

MARTORELL CRATE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	20176	**.01**	●	**LED**	**.15 .24 .32**	**.ST**	**.9**	**.27**	470	8	700	**.DA .PU .D1**	
								.30	498				
								.40	515				
	20176	**.02**	●	**LED**	**.15 .24 .32**	**.ST**	**.9**	**.27**	940	16	700	**.DA .PU .D1**	
								.30	996				
								.40	1030				
	20176	**.03**	●	**LED**	**.15 .24 .32**	**.ST**	**.9**	**.27**	1410	24	700	**.DA .PU .D1**	
								.30	1494				
								.40	1545				

Reference order ⬟ ● ■ ▼

20176.XX.SR.XX.XX.ST.9.XX.XX

● Select finishes

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

15º | 24º | 32º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

INSTALLATIONS

MARTORELL CRATE

REF 20176.SR

.SR
SURFACE

·20176 MARTORELL CRATE | SR
Pag. 330

.RF
RECESSED FRAME

·20176 MARTORELL CRATE | RF
Pag. 504

PHOTOMETRY

MARTORELL SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	20132	.01	●	LED	.15 .25 .38	.ST	.9	.27	720	10	500	.DA .PU .D1	
								.30	759				
								.40	908				

Reference order ⬟ ● ■ ▼
20132.01.SR.XX.XX.ST.9.XX.XX

MARTORELL SQ2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20133	.01	●	LED	.15 .25 .38	.ST	.9	.27	1440	20	500	.DA .PU .D1	
								.30	1518				
								.40	1816				

Reference order ⬟ ● ■ ▼
20133.01.SR.XX.XX.ST.9.XX.XX

● Select finishes

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

15º | 25º | 38º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options
Special RAL Color

INSTALLATIONS

MARTORELL
SQ | SQ2

REF 20132.SR | REF 20133.SR

.SR
SURFACE

·20132 MARTORELL SQ | SR ·20133 MARTORELL SQ2 | SR
Pag. 332

PHOTOMETRY

15º 25º 38º

MARTORELL TUBULAR 20	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	20125	.01	●	LED	.20 .40	.ST	.9	.27	174	3	300	.DA .PU .D1	600 Ø22,5
								.30	187				
								.40	212				
	20125	.02	●	LED	.20 .40	.ST	.9	.27	174	3	300	.DA .PU .D1	1000 Ø22,5
								.30	187				
								.40	212				

Reference order | 20125.XX | .SR .PN | .XX.XX.ST.9.XX.XX

MARTORELL TUBULAR 40	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	20192	.01	●	LED	.20 .40	.ST	.9	.27	954	14	300	.DA .PU .D1	400 Ø40
								.30	991				
								.40	1067				
	20192	.02	●	LED	.20 .40	.ST	.9	.27	954	14	300	.DA .PU .D1	600 Ø40
								.30	991				
								.40	1067				

Reference order | 20192.XX | .SR .PN | .XX.XX.ST.9.XX.XX

MARTORELL TUBULAR 60	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	20196	.01	●	LED	.20 .40	.ST	.9	.27	1662	21	350	.DA .PU .D1	400 Ø60
								.30	1716				
								.40	1729				
	20196	.02	●	LED	.20 .40	.ST	.9	.27	1662	21	350	.DA .PU .D1	600 Ø60
								.30	1716				
								.40	1729				

Reference order | 20196.XX | .SR .PN | .XX.XX.ST.9.XX.XX

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

20º | 40º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

INCLUDED (.PN)

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options
Special RAL Color

new

.SR

.PN

PENDANT | SURFACE

• Select finishes

.BK-BK .BK-WH .BK-GC .BK-BM .BK-BS .BK-BC .BK-CR .BK-CB .BK-GY .BK-MG .BK-VC .BK-YM

.WH-BK .WH-WH .WH-GC .WH-BM .WH-BS .WH-BC .WH-CR .WH-CB .WH-GY .WH-MG .WH-VC .WH-YM

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06 | IP20 | LIFE 50000H | DIM OPTIONAL | INTEGRATED | INDOOR | 220-240 V 50-60 Hz | CE

MARTORELL
TUBULAR 20 | 40 | 60
REF 20125.PN | 20192.PN | 20196.PN
20125.SR | 20192.SR | 20196.SR

INSTALLATIONS

.PN
PENDANT

· 20125 TUBULAR 20 · 20192 TUBULAR 40 · 20196 TUBULAR 60
Pag. 334

.SR
SURFACE

20192 TUBULAR 40 · 20196 TUBULAR 60
Pag. 334

PHOTOMETRY

20º 40º

MARTORELL TILT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	20195	.01	●	LED	.20 .40	.ST	.9	.27	164	3	700	.DA .PU .D1	
								.30	155				
								.40	188				

Reference order | 20195.01.SR.XX.XX.ST.9.XX.XX

● Select intenal - external finishes

.WH-WH .BK-BK

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

COLOR

□ ■

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

20º | 40º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options
Special RAL Color

.SR
SURFACE

INSTALLATIONS

MARTORELL
TUBULAR TILT

REF 20195.SR

.SR
SURFACE

·20195 MARTORELL TUBULAR TILT | SR
Pag. 336

PHOTOMETRY

20º 40º

KLIMT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	20134	.01	●	LED	.15 .24 .38	.ST	.9	.27	395	8	700	.DA .PU .D1	94 Ø75
								.30	497				
								.40	550				
	20134	.02	●	LED	.15 .25 .38 .60	.ST	.9	.27	803	11	500	.DA .PU .D1	98 Ø100
								.30	983				
								.40	991				
	20134	.03	●	LED	.15 .28 .40 .60	.ST	.9	.27	1945	30	700	.DA .PU .D1	144 Ø125
								.30	2073				
								.40	2311				

Reference order | ⬟ ● ■ ▼ 20134.XX.SR.XX.XX.ST.9.XX.XX

● Select external - internal finishes

*1 Remote driver when dimmable (.01 .02). *Driver remoto cuando es dimable (.01 .02).*

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

15º | 24º | 25º | 28º | 38º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options
Special RAL Color

.SR
SURFACE

SURFACE

INSTALLATIONS

.SR
SURFACE

·20134 KLIMT | SR
Pag. 338

.TK
TRACKLIGHT

·20134 KLIMT | TK
Pag. 748

.RF
RECESSED FRAME

·20134 KLIMT | RF
Pag. 508



KLIMT

REF 20134.SR

PHOTOMETRY

KLIMT FIX	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	20135	.01	●	LED	.15 .24 .38	.ST	.9	.27	395	8	700	.DA .PU .D1	94 Ø75
								.30	497				
								.40	659				
	20135	.02	●	LED	.15 .25 .38 .60	.ST	.9	.27	803	11	500	.DA .PU .D1	98 Ø100
								.30	983				
								.40	991				
	20135	.03	●	LED	.15 .28 .40 .60	.ST	.9	.27	1945	30	700	.DA .PU .D1	144 Ø125
								.30	2073				
								.40	2311				

Reference order ⬟ ● ■ ▼

20135.XX.SR.XX.XX.ST.9.XX.XX

PHOTOMETRY

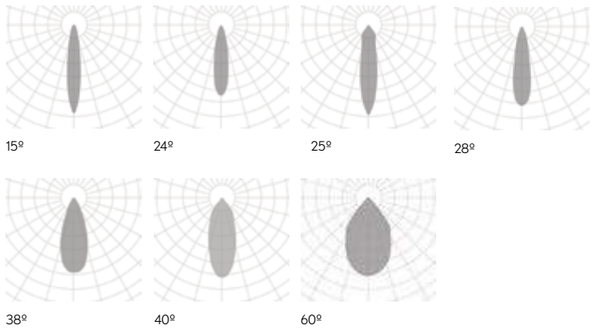

- Select external - internal finishes

*1 Remote driver when dimmable. (.01 .02) *Driver remoto cuando es dimable (.01 .02).*

● FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

15º | 24º | 25º | 28º | 38º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options
Special RAL Color

new

.SR

SURFACE

INSTALLATIONS

KLIMT FIX

REF 20135.SR

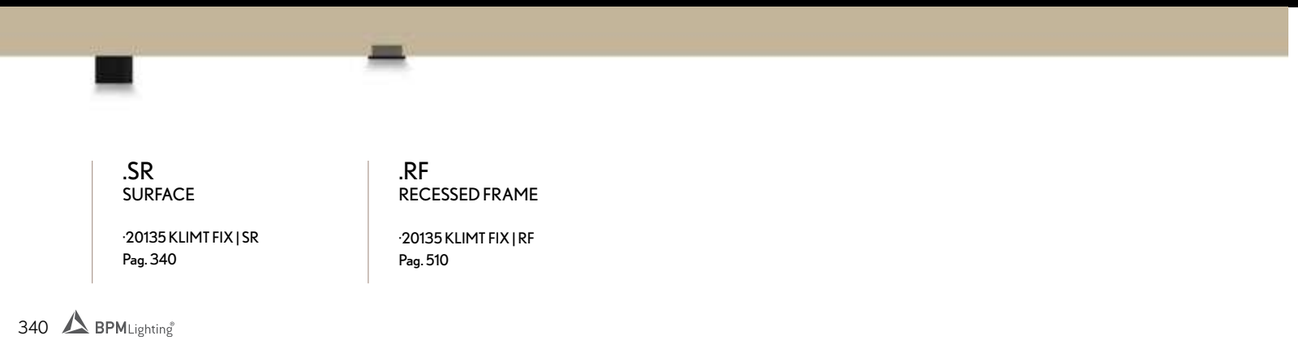

.SR
SURFACE

·20135 KLIMT FIX | SR
Pag. 340

.RF
RECESSED FRAME

·20135 KLIMT FIX | RF
Pag. 510

GEO	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	30511	**.01**	●	**LED**	**.15 .24 .38**	**.ST**	**.9**	**.27**	498	8	700	**.DA .PU .D1**	120 Ø82
								.30	513				
								.40	622				
	30511	**.02**	●	**LED**	**.15 .25 .38 .60**	**.ST**	**.9**	**.27**	1075	14	350	**.DA .PU .D1**	145 Ø102
								.30	1114				
								.40	1319				
	30511	**.03**	●	**LED**	**.15 .28 .40**	**.ST**	**.9**	**.27**	1856	30	700	**.DA .PU .D1**	170 Ø125
								.30	2031				
								.40	2529				

Reference order ⬟ ● ■ ▼

30511.XX.SR.XX.XX.ST.9.XX.XX

PHOTOMETRY

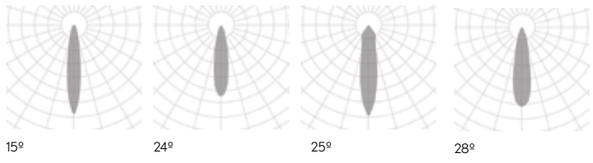

15º 24º 25º 28º

38º 40º 60º

● Select external - internal finishes

BK-BK WH-WH

*1 Remote driver when dimmable. (.01 .02) *Driver remoto cuando es dimable (.01 .02).*

• FINISHES

COLORS

□ ■

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

15º | 24º | 25º | 28º | 38º | 40º | 60º

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options
Special RAL Color

new

.SR

SURFACE

INSTALLATIONS

ALUMINIUM PC | 90° | 350° | CRI ≥90 | IK06 | IP20 | LIFE 50000H | DIM OPTIONAL | | INTEGRATED | INDOOR | | 220-240 V 50-60 Hz | CE

GEO

REF 30511.SR

.SR
SURFACE

·30511 GEO | SR
Pag. 342

.TK
TRACKLIGHT

·30511 GEO | TK
Pag. 750

.RF
RECESSED FRAME

·30511 GEO | RF
Pag. 512

LUK FREIR	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	20018	**.01**	●	**.LED**	**.40 .60**	**.ST**	**.9**	**.27**	830	9	350	**.DA .PU .D1**	
								.30	845				
								.40	895				
	20018	**.02**	●	**.LED**	**.40 .60**	**.ST**	**.9**	**.27**	1271	16	500	**.DA .PU .D1**	
								.30	1616				
								.40	1682				

Reference order ⬟ ● ■ ▼

20018XX.SR.XX.XX.ST.9.XX.XX

LUK FREIR 2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	20019	**.01**	●	**.LED**	**.40 .60**	**.ST**	**.9**	**.27**	1660	18	350	**.DA .PU .D1**	
								.30	1690				
								.40	1790				
	20019	**.02**	●	**.LED**	**.40 .60**	**.ST**	**.9**	**.27**	2542	32	500	**.DA .PU .D1**	
								.30	3232				
								.40	3364				

● Select finishes

Reference order ⬟ ● ■ ▼

20019.XX.SR.XX.XX.ST.9.XX.XX

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

.SR

SURFACE

INSTALLATIONS

LUK
FREIR | FREIR 2

REF 20018.SR | REF 20019.SR

.SR
SURFACE

·20018 LUK FREIR ·20019 LUK FREIR 2 | SR
Pag. 344

.RF
RECESSED FRAME

·20018 LUK FREIR ·20019 LUK FREIR 2 | RF
Pag. 514

.TR
TRIMLESS

·20018 LUK FREIR ·20019 LUK FREIR 2 | TR
Pag. 680

PHOTOMETRY

LUK CRUSADER	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP. ▼	SKETCH
	20082	.01	●	LED	.24 .40 .60	.ST	.9	.27	1633	20	700	.DA .PU .D1	 172 Ø120
								.30	2138				
								.40	2228				

Reference order | 20082.01.SR.XX.XX.ST.9.XX.XX

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

24º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

● Select finishes

BK-BK WH-WH WH-BK



.SR
SURFACE

INSTALLATIONS

LUK CRUSADER

REF 20082.SR

.SR
SURFACE

·20082 LUK CRUSADER | SR
Pag. 346

.TK
TRACKLIGHT

·20082 LUK CRUSADER | TK
Pag. 752

PHOTOMETRY

24º 40º 60º

LUK HAWKEYE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP. ▼	SKETCH
	20083	.01	●	LED	.24 .40 .60	.ST	.9	.27	1633	20	700	.DA .PU .D1	
								.30	2138				
								.40	2228				

Reference order | 20083.01.SR.XX.XX.ST.9.XX.XX

LUK HAWKEYE 2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP. ▼	SKETCH
	20084	.01	●	LED	.24 .40 .60	.ST	.9	.27	3266	40	700	.DA .PU .D1	
								.30	4276				
								.40	4456				

Reference order | 20084.01.SR.XX.XX.ST.9.XX.XX

● Select finishes





• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

24º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

.SR

SURFACE

INSTALLATIONS

ALUMINIUM PC | 0° | 350° | CRI ≥90 | IK06 | IP20 | LIFE 50000H | DIM OPTIONAL | INTEGRATED | INDOOR | 220-240 V 50-60 Hz | CE

LUK
HAWKEYE | HAWKEYE 2

REF 20083.SR | 20084.SR

.SR
SURFACE

·20083 HAWKEYE ·20084 HAWKEYE 2 | SR
Pag. 348

.TK
TRACKLIGHT

·20083 HAWKEYE ·20084 HAWKEYE 2 | TK
Pag. 754

PHOTOMETRY

CUBE TUBE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP. ▼	SKETCH
	9050	.01	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	567 590 592	8	350	.DA .PU .D1	185 Ø86
	9050	.02	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	567 590 592	8	350	.DA .PU .D1	250 Ø86
	9050	.03	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	567 590 592	8	350	.DA .PU .D1	 350 Ø86
	9050	.04	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	567 590 592	8	350	.DA .PU .D1	 450 Ø86

Reference order | 9050.XX | .SR .PN | .XX.XX.ST.9.XX.XX

CUBE TUBE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	9052	.01	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	1109 1597 1664	18	500	.DA .PU .D1	175 Ø120

Reference order | 9052.01 | .SR .PN | .XX.XX.ST.9.XX.XX

● Select finishes

● FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03 | .04

LIGHTING OPTIONS

■ BEAM ANGLE

24º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

INCLUDED (.PN)

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options (Casambi)
Special RAL Color

PENDANT | SURFACE

.SR

.PN

INSTALLATIONS

CUBE TUBE

REF 9050.SR | 9052.SR | 9050.PN | 9052.PN

.PN
PENDANT

· 9050 | 9052 CUBE TUBE | PN
Pag. 350

.TK
TRACKLIGHT

· 9050 CUBE TUBE | TK
Pag. 756

.SR
SURFACE

· 9050 | 9052 CUBE TUBE | SR
Pag. 350

PHOTOMETRY

24º 40º 60º

CUBE TUBE MOVE	REF.	DIMENSIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP. ▼	SKETCH
	9051	.01	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	633 745 968	11	500	.DA .PU .D1	191 Ø100
	9051	.02	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	633 745 968	11	500	.DA .PU .D1	250 Ø100
	9051	.03	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	633 745 968	11	500	.DA .PU .D1	350 Ø100
	9051	.04	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	633 745 968	11	500	.DA .PU .D1	450 Ø100

Reference order | 9051.XX | .SR .PN | .XX.XX.ST.9.XX.XX

CUBE TUBE MOVE	REF.	DIMENSIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP. ▼	SKETCH
	9053	.01	●	LED	.24 .40 .60	.ST	.9	.27 .30 .40	1359 1499 1734	20	500	.DA .PU .D1	165 Ø140

Reference order | 9053.01 | .SR .PN | .XX.XX.ST.9.XX.XX

● Select finishes

● FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03 | .04

LIGHTING OPTIONS

■ BEAM ANGLE

24º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

INCLUDED (.PN)

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options
Special RAL Color

.SR
.PN
PENDANT | SURFACE

INSTALLATIONS

CUBE
TUBE MOVE

REF 9051.SR | 9053.SR | 9051.PN | 9053.PN

.PN
PENDANT

· 9051 | 9053 TUBE MOVE | PN
Pag. 352

.SR
SURFACE

· 9051 | 9053 TUBE MOVE | SR
Pag. 352

PHOTOMETRY

24º 40º 60º

CUBE SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP. ▼	SKETCH
	8201	.01	●	LED	.24 .40 .60	.ST	.9	.27	738	11	350	.DA .PU .D1	
								.30	862				
								.40	929				

Reference order | 8201.01.SR.XX.XX.ST.9.XX.XX

CUBE SQ2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP. ▼	SKETCH
	8202	.01	●	LED	.24 .40 .60	.ST	.9	.27	1476	22	350	.DA .PU .D1	
								.30	1724				
								.40	1857				

Reference order | 8202.01.SR.XX.XX.ST.9.XX.XX

CUBE SQ3	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP. ▼	SKETCH
	8203	.01	●	LED	.24 .40 .60	.ST	.9	.27	2214	33	350	.DA .PU .D1	
								.30	2586				
								.40	2786				

Reference order | 8203.01.SR.XX.XX.ST.9.XX.XX

● Select external - internal finishes

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

24º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

.SR

SURFACE

INSTALLATIONS

CUBE
SQ | SQ2 | SQ3

REF 8201.SR | REF 8202.SR | REF 8203.SR

.SR
SURFACE

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | SR
Pag. 354

.RF
RECESSED FRAME

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | RF
Pag. 518

.TR
TRIMLESS

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | TR
Pag. 682

PHOTOMETRY

CUBE SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP. ▼	SKETCH
	8201	.02	●	LED	.24 .40 .60	.ST	.9	.27	1242	19	500	.DA .PU .D1	
								.30	1345				
								.40	1867				

Reference order | 8201.02.SR.XX.XX.ST.9.XX.XX

CUBE SQ2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP. ▼	SKETCH
	8202	.02	●	LED	.24 .40 .60	.ST	.9	.27	2484	38	500	.DA .PU .D1	
								.30	2670				
								.40	3734				

Reference order | 8202.02.SR.XX.XX.ST.9.XX.XX

CUBE SQ3	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP. ▼	SKETCH
	8203	.02	●	LED	.24 .40 .60	.ST	.9	.27	3726	58	500	.DA .PU .D1	
								.30	4035				
								.40	5601				

Reference order | 8203.02.SR.XX.XX.ST.9.XX.XX

● Select external - internal finishes

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

24º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

.SR

SURFACE

INSTALLATIONS

CUBE
SQ | SQ2 | SQ3

REF 8201.SR | REF 8202.SR | REF 8203.SR

.SR
SURFACE

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | SR
Pag. 354

.RF
RECESSED FRAME

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | RF
Pag. 518

.TR
TRIMLESS

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | TR
Pag. 682

PHOTOMETRY

CATLI	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	3010	.01	●	GU10	.GU	GU10				8			97 Ø80
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	
								.30	570				
								.40	711				

Reference order | 3010.01.SR.XX.XX.XX.X.XX.XX

CATLI SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	3011	.01	●	GU10	.GU	GU10				8			97 80x80
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	
								.30	570				
								.40	711				

Reference order | 3011.01.SR.XX.XX.XX.X.XX.XX

● Select intenal - external finishes

.WH-WH .BK-BK .SA-SA

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

COLOR

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU10

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

.SR

SURFACE

INSTALLATIONS

CATLI | CATLI SQ

REF 3010.SR | 3011.SR

.SR
SURFACE

·3010 CATLI | SR ·3011 CATLI SQ | SR
Pag. 362

.RF
RECESSED FRAME

·3010 CATLI | RF ·3011 CATLI SQ | RF
Pag. 560

PHOTOMETRY

40º

60º

ORACLE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20087	.01	●	LED	.24 .40 .60	.ST	.9	.27	1079	14	500	.DA .PU .D1	 200 Ø132
								.30	1216				
								.40	1273				

Reference order | 20087.01 | .SR .PN | .XX.XX.ST.9.XX.XX

● Select finishes

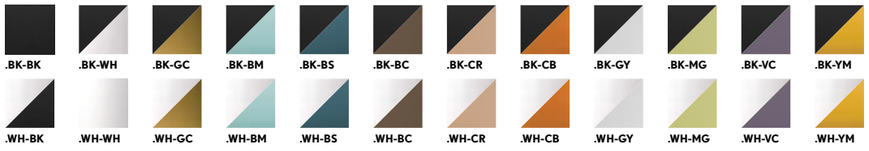

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

24º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

INCLUDED (.PN)

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

INSTALLATIONS



ORACLE

REF 20087.SR | 20087.PN

.PN
PENDANT

·20087 ORACLE | PN
Pag. 358

.TK
TRACKLIGHT

·20087 ORACLE | TK
Pag. 758

.SR
SURFACE

·20087 ORACLE | SR
Pag. 358

PHOTOMETRY

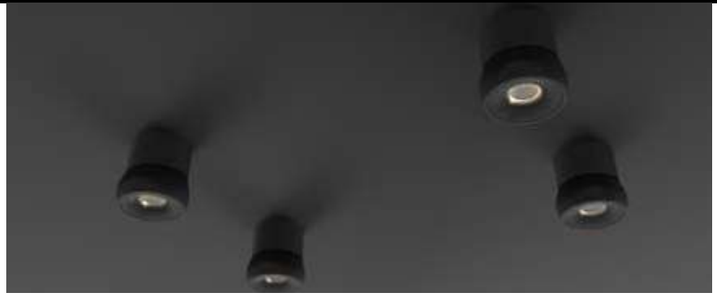

FACE TUBULAR	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	20205	.01	●	LED	.40	.ST	.9	.27	480	8	350	.DA .PU .D1	
								.30	493				
								.40	496				

Reference order | 20205.01.SR.XX.XX.ST.9.XX.XX

- Select external-internal finishes

.WH-WH .BK-BK .GC-GC .CB-CB

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Wireless Control Options
Special RAL Color

new

.SR

SURFACE

INSTALLATIONS



FACE TUBULAR

REF 20205.SR

.SR
SURFACE

·20205 FACE TUBULAR | SR
Pag. 360

.RF
RECESSED FRAME

·20205 FACE TUBULAR | RF
Pag. 506

PHOTOMETRY



40º

FACE TUBULAR	REF.	DIMEN-SIONS ⬟	FINISHES	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	20205	**.01**	●	LED	**.40**	**.ST**	**.9**	**.27**	633	11	500	**.DA .PU .D1**	300 Ø40
								.30	678				
								.40	701				
	20205	**.02**	●	LED	**.40**	**.ST**	**.9**	**.27**	633	11	500	**.DA .PU .D1**	 400 Ø40
								.30	678				
								.40	701				

Reference order | 20205.XX.PN.XX.XX.ST.9.XX.XX

● Select external-internal finishes

.WH-WH .BK-BK .GC-GC .CB-CB

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

● FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

INCLUDED

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Wireless Control Options
Special RAL Color

INSTALLATIONS

FACE TUBULAR

REF 20205.PN

.PN
PENDANT

·20205 FACE TUBULAR | PN
Pag. 364

PHOTOMETRY



40º

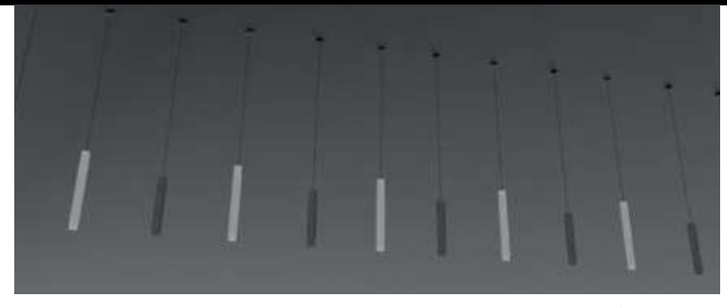

FACE TUBULAR SPAC	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	20207	**.01**	●	LED	**.40**	**.ST**	**.9**	**.27**	1059	16	700	**.DA .PU .D1**	 300 Ø60
								.30	1062				
								.40	1108				
	20207	**.02**	●	LED	**.40**	**.ST**	**.9**	**.27**	1059	16	700	**.DA .PU .D1**	 400 Ø60
								.30	1062				
								.40	1108				

Reference order | 20207.XX.PN.XX.XX.ST.9.XX.XX

● Select external-internal finishes

.WH-WH .BK-BK .GC-GC .CB-CB

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

● FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

INCLUDED

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Wireless Control Options
Special RAL Color

new

.PN

PENDANT

INSTALLATIONS

FACE
TUBULAR SPAC

REF 20207.PN

.PN
PENDANT

·20207 FACE TUBULAR SPAC | PN
Pag. 366

PHOTOMETRY

40º

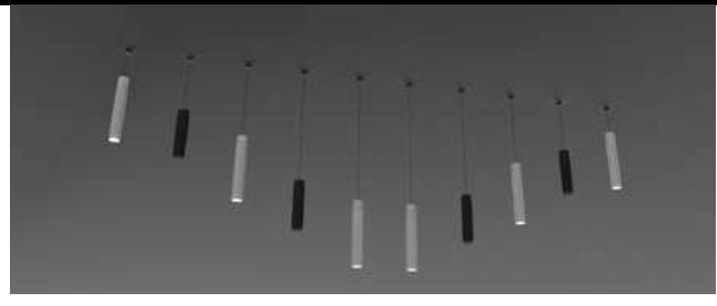

FACE KIERA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	20204	**.01**	●	LED	**.38**	**.ST**	**.9**	**.27**	411	5	500	**.DA .PU .D1**	57 Ø56
								.30	447				
								.40	488				
	20204	**.02**	●	LED	**.38**	**.ST**	**.9**	**.27**	572	8	700	**.DA .PU .D1**	81 Ø75
								.30	574				
								.40	594				
	20204	**.03**	●	LED	**.38**	**.ST**	**.9**	**.27**	1396	18	500	**.DA .PU .D1**	 115 Ø100
								.30	1655				
								.40	1962				

Reference order | ⬟ ● ■ ▼ 20204.XX.PN.XX.XX.ST.9.XX.XX

● Select external-internal finishes

BK-BK

WH-WH

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

38º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

INCLUDED

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Wireless Control Options

new

.PN

PENDANT

INSTALLATIONS

FACE
KIERA

REF 20204.PN

.PN
PENDANT

·20204 FACE KIERA | PN
Pag. 368

PHOTOMETRY

38º

KIERA CEMENT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	20208	**.01**	●	LED	**.38**	**.ST**	**.9**	**.27**	411	5	500	**.DA .PU .D1**	 197 Ø56
								.30	447				
								.40	488				
	20208	**.02**	●	LED	**.38**	**.ST**	**.9**	**.27**	572	7	700	**.DA .PU .D1**	 269 Ø75
								.30	574				
								.40	594				
	20208	**.03**	●	LED	**.38**	**.ST**	**.9**	**.27**	1396	18	500	**.DA .PU .D1**	 342 Ø100
								.30	1655				
								.40	1962				

Reference order ⬟ ● ■ ▼

20208.XX.PN.XX.XX.ST.9.XX.XX

● Select finishes

.BK-GY

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

● FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

38º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

INCLUDED

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Wireless Control Options

new

.PN

PENDANT

INSTALLATIONS

FACE
KIERA CEMENT

REF 20208.PN

.PN
PENDANT

·20208 FACE KIERA CEMENT | PN
Pag. 370

PHOTOMETRY

38º

FACE IRIS	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	20203	**.01**	●	LED	**.60**	**.ST**	**.9**	**.27**	817	10	500	**.DA .PU .D1**	
								.30	852				
								.40	962				
	20203	**.02**	●	LED	**.60**	**.ST**	**.9**	**.27**	1504	20	500	**.DA .PU .D1**	
								.30	1811				
								.40	1858				
	20203	**.03**	●	LED	**.60**	**.ST**	**.9**	**.27**	1837	29	700	**.DA .PU .D1**	
								.30	2264				
								.40	2373				

Reference order | ⬟ ● ■ ▼ 20203.XX.PN.XX.XX.ST.9.XX.XX

● Select external-internal finishes

.WH-WH .BK-BK .BC-BC .CB-CB

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

● FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

INCLUDED

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Wireless Control Options
Special RAL Color

INSTALLATIONS



FACE
IRIS

REF 20203.PN

.PN
PENDANT

·20203 FACE IRIS | PN
Pag. 372

PHOTOMETRY

60º

SUBLIM	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	20206	**.01**	●	LED	**.36**	**.ST**	**.9**	**.27**	467	9	350	**.DA .PU .D1**	 270 40
								.30	471				
								.40	511				
	20206	**.02**	●	LED	**.36**	**.ST**	**.9**	**.27**	467	9	350	**.DA .PU .D1**	 400 40
								.30	471				
								.40	511				
	20206	**.03**	●	LED	**.36**	**.ST**	**.9**	**.27**	467	9	350	**.DA .PU .D1**	1000 40
								.30	471				
								.40	511				

Reference order | ⬟ ● ■ ▼ 20206.XX.PN.XX.XX.ST.9.XX.XX

● Select external-internal finishes

.WH-WH .BK-BK .BC-BC .CB-CB

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

● FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

36º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

INCLUDED

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Wireless Control Options
Special RAL Color

new

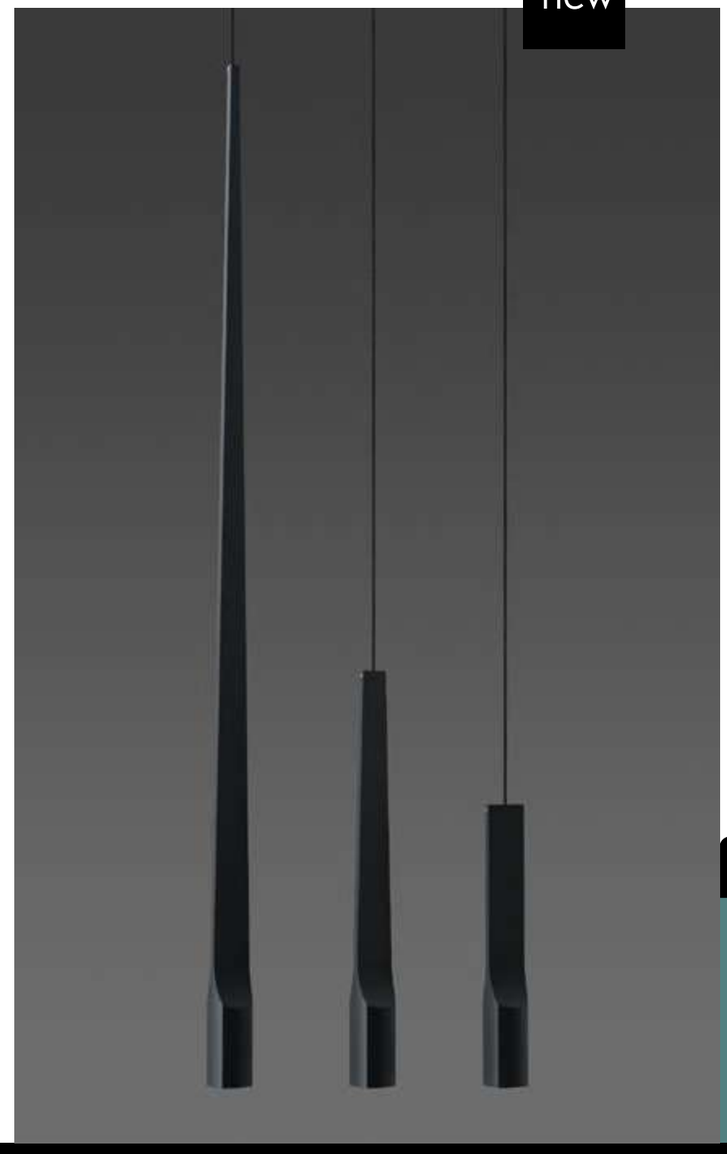

.PN

PENDANT

INSTALLATIONS

SUBLIM

REF 20206.PN

.PN
PENDANT

·20206 SUBLIM | PN
Pag. 374

PHOTOMETRY

36º

GALANTA BONETE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	20222	.01	●	LED	.OP	.ST	.9	.27	419	6	500	.DA .PU .D1	70 Ø80
								.30	474				
								.40	510				

Reference order | 20222.01.PN.XX.XX.ST.9.XX.XX

● Select finishes

.WH-WH .BK-BK .GC-GC .BM-BM .BS-BS .BC-BC .CR-CR .CB-CB .GY-GY .MG-MG .VC-VC .YM-YM

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

INCLUDED

Suspension cable 1.5m
Connection box with luminaire's finish

ON DEMAND

Wireless Control Options

new

.PN
PENDANT

INSTALLATIONS

GALANTA BONETE

REF 20222.PN

.PN
PENDANT

·20222 GALANTA BONETE | PN
Pag. 376

PHOTOMETRY

OPAL

VENISE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	410011	**.01**	●	LED	**.OP**	**.ST**	**.9**	**.30**	583	12	500	**.DA .PU .D1**	75 Ø200
	410011	**.02**	●	LED	**.OP**	**.ST**	**.9**	**.30**	1302	16	500	**.DA .PU .D1**	105 Ø320
	410011	**.03**	●	LED	**.OP**	**.ST**	**.9**	**.30**	1343	30	700	**.DA .PU .D1**	135 Ø450
	410011	**.04**	●	LED	**.OP**	**.ST**	**.9**	**.30**	2111	45	1050	**.DA .PU .D1**	165 Ø600

Reference order | 410011.XX.PN.XX.XX.ST.9.XX.XX

● Select finishes

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

3000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

INCLUDED

Suspension cable 1.5m
Connection box with luminaire's finish

new

.PN

PENDANT

INSTALLATIONS

VENISE

REF 410011.PN

.PN
PENDANT

·410011 VENISE | PN
Pag. 378

PHOTOMETRY

OPAL

CONNECTION BOXES





CB03.XX





CB10.XX





CB02.XX





CB07.XX





CB13.XX





CB05.XX

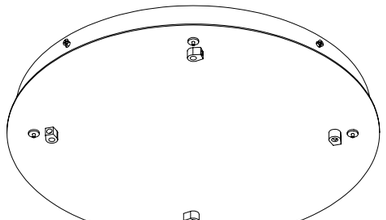

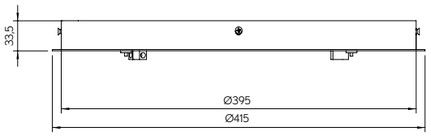

CB12.XX

CONNECTION & DRIVER BOXES



CB09.12.XX



CB06.32.XX



CB08.30



CB09.32.XX

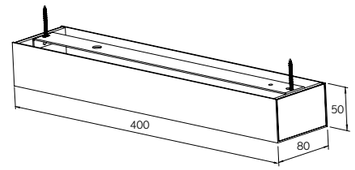

CB06.40.XX



CB09.40.XX

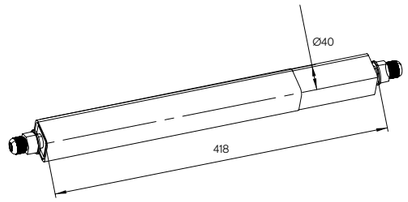

CB04.OP



CB08.38

ACCESORIES

- Select finishes

SUSPENSION ACCESORIES

SUSPENSION KIT

- **SC05.XX** - 5 m.
- **SC07.XX** - 7 m.
- **SC10.XX** - 10m.



CENTRAL ROD SUSPENSION + CONNECTION BOX

- **SC20.60.XX** - 600mm
- **SC20.80.XX** - 800mm
- **SC20.100.XX** - 1000mm



- **SC21.60.XX** - 600mm
- **SC21.80.XX** - 800mm
- **SC21.100.XX** - 1000mm



CABLE CONCENTRATOR KIT + CONNECTION BOX

- **SC21.XX** - .25 | .35
- **SC22.XX** - .45 | .65
- **SC23.XX** - 95 | .125

INDIVIDUAL CEILING RECESSED ACCESORIES



CB20.RF.XX





CB21.RF.XX





CB22.RF.XX

* Check luminaire's compatibility. *Consultar compatibilidad con la luminaria.*

The invisible star

El protagonista invisible

The imperceivable force behind the project. An entity in its own right, whose only purpose is to enhance the ambiance, never draw attention to itself. Meet the White Structural Collection, a minimalist design featuring Crismosil , an innovative, exclusive material that integrates seamlessly in any space.

Ser el foco de atención sin ser visto. Una función en sí misma, con el único fin de dejar todo el protagonismo al espacio, nunca a la luminaria. Así se presenta la colección White Structural, resultado de un diseño minimalista y fruto de la producción exclusiva con Crismosil, un innovador material que permite una completa integración en los espacios.

STRUCTURAL

SURFACE

NOCTUA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	10103	.01	●	GU10	.GU	GU10	-			8	-		
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	
								.30	570				
								.40	711				

NOCTUA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	10103	.02	●	GU10	.GU	GU10	-			8	-		
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	
								.30	570				
								.40	711				

NOCTUA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10103	.03	●	GU5.3		GU5.3	-			8	-		
				GU10	.GU	GU10				8			
				GX8.5	.CD	GX8.5				8			
				LED	.40 .60	.ST BPM3181	.9	.27	1538	16	500	.DA .PU .D1	
								.30	1722				
								.40	1355				

30° 10103.01 · 10103.02

45° 10103.03

LUMINAIRE INCLUDES

Surface mounting kit

Reference order | 10103.XX.SR.XX.XX.XX.X.XX.XX

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

□

⬟ DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40 | 60

GU5.3 | GU10 | GX8.5

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Wireless Control Options

CRISMOSIL

.SR

SURFACE

• Select finishes

.WH-WH

CRISMOSIL | 30° | 45° | CRI ≥90 | IK04 | IP20 | LIFE 50000H | DIM OPTIONAL | | INTEGRATED | INDOOR | | 220-240 V 50-60 Hz | CE

NOCTUA

REF 10103.SR

PHOTOMETRY

40º 60º

NOCTUA SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	10099	.01	●	GU5.3		GU5.3	-			8	-		
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	
								.30	570				
								.40	711				

NOCTUA SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10099	.02	●	GU10	.GU	GU10	-			8	-		
				GX8.5	.CD	GX8.5				8			
				LED	.40 .60	.ST BPM3181	.9	.27	1538	16	500	.DA .PU .D1	
								.30	1722				
								.40	1355				

30º 10099.01

45º 10099.02

LUMINAIRE INCLUDES

Surface mounting kit

Reference order | 10099.XX.SR.XX.XX.XX.X.XX.XX

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

□

⬟ DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40 | 60

GU5.3 | GU10 | GX8.5

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Wireless Control Options

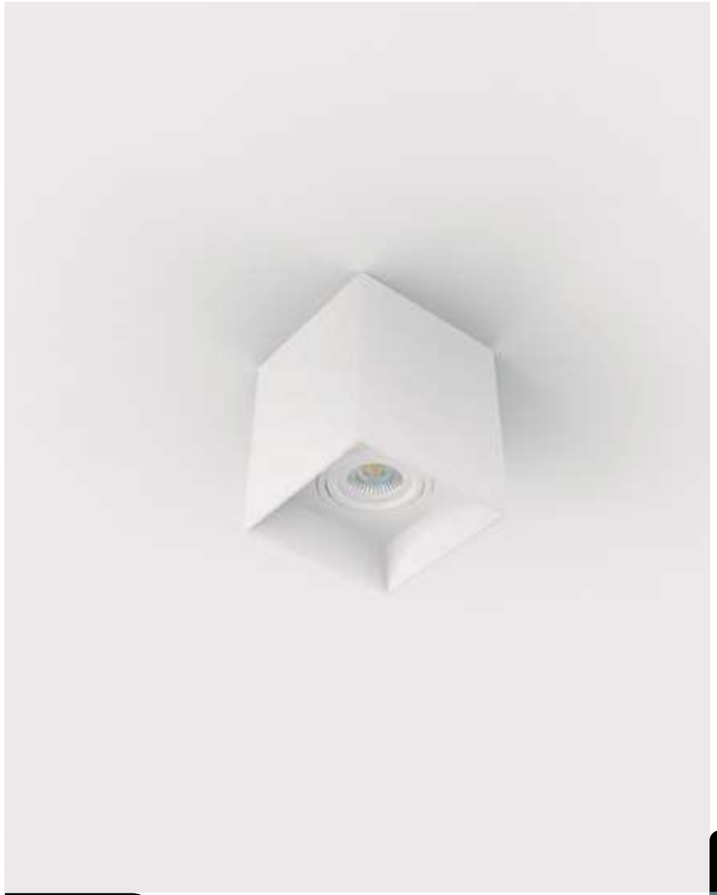

CRISMOSIL

.SR

SURFACE

● Select finishes

.WH-WH

NOCTUA SQ

REF 10099.SR

PHOTOMETRY

40º



60º

NOCTUA DEEP	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	10100	.01	●	GU5.3		GU5.3	-			8	-		
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	767				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Surface mounting kit

Reference order | ⬟ ● ■ ▼ 10100.01.SR.XX.XX.XX.X.XX.XX

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

□

⬟ DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40 | 60

GU5.3 | GU10

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Wireless Control Options

CRISMOSIL

.SR

SURFACE

● Select finishes

.WH-WH

NOCTUA DEEP

REF 10100.SR

PHOTOMETRY

40º 60º

NOCTUA VENUS	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	10102	.01	●	GU5.3		GU5.3	-			8	-		
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	767				

NOCTUA VENUS	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10102	.02	●	GU10	.GU	GU10	-			8	-		
				GX8.5	.CD	GX8.5				8			
				LED	.40 .60	.ST BPM3181	.9	.27	1538	16	500	.DA .PU .D1	
								.30	1722				
								.40	1355				

30° 10102.01

45° 10102.02

LUMINAIRE INCLUDES

Surface mounting kit

Reference order | ⬟ ● ■ ▼ 10102.XX.SR.XX.XX.XX.X.XX.XX

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

□

⬟ DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40 | 60

GU5.3 | GU10 | GX8.5

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Wireless Control Options

CRISMOSIL

.SR

SURFACE

● Select finishes

.WH-WH

NOCTUA VENUS

REF 10102.SR

PHOTOMETRY

40º



60º

RECESSED WITH FRAME

ALABAMA

ALABAMA
10158 PAG. 396

OHIO

OHIO
10188 PAG. 400

OHIO SQ
10204 PAG. 404

FLORIDA

FLORIDA
10190 PAG. 408

FLORIDA SQ
10191 PAG. 412

ALBERTA

ALBERTA SOFT
10217 PAG. 416

ALBERTA
10176 PAG. 420

ALARIK

ALARIK SLIM
20224 PAG. 428

MODULIGHT

MODULIGHT
10210 PAG. 434

ALBA

ALBA MINI
10211 PAG. 440

ALBA
10160 PAG. 444

ALBA ASIMETRIC
210009 PAG. 448

ALBA PLUS
10178 PAG. 452

ALBA PLUS ASIMETRIC
210008 PAG. 456

BOLD

BOLD
10190 PAG. 460

BOLD LINE
10191 PAG. 460

WING

WING
10200 PAG. 464

OKKO MODULAR

OKKO MODULAR
410012 PAG. 468

OKKO PLUS MODULAR
410013 PAG. 470

LENT

LENT MODULAR
10216 PAG. 472

LENT MOTION
10212 PAG. 474

SASSY

SASSY
410002 PAG. 478

SASSY SQ
410003 PAG. 482

VIO

VIO
20185 PAG. 488

VIO DEEP
20186 PAG. 488

VIO DOME
20183 PAG. 488

VIO SQ
20181 PAG. 488

VIO MOVE
20184 PAG. 488

VIO DEEP MOVE
20187 PAG. 488

VIO DOME MOVE
20182 PAG. 488

VIO SQ MOVE
20180 PAG. 488

GALANTA

GALANTA DEEP
410001 PAG. 492

VISUAL INDEX

MAR-TORELL

MARTORELL
20115 PAG. 494

MARTORELL MOVE
20110 PAG. 496

MARTORELL TARREGA
20117 PAG. 498

MARTORELL TARREGA SQ
20116 PAG. 500

MARTORELL TARREGA SQ2
20119 PAG. 500

MARTORELL MINI CRATE
20175 PAG. 502

MARTORELL CRATE
20176 PAG. 504

FACE

FACE TUBULAR MOVE
20205 PAG. 506

KLIMT

KLIMT
20134 PAG. 508

KLIMT FIX
20135 PAG. 510

GEO

GEO
30511 PAG. 512

LUK

LUK FREIR
20018 PAG. 514

LUK FREIR 2
20019 PAG. 514

LUK
20028 PAG. 516

LUK 2
20071 PAG. 516

CUBE

CUBE
8201 PAG. 518

CUBE SQ2
8202 PAG. 518

CUBE SQ3
8203 PAG. 518

CUBE SPOT
3120 PAG. 522

CUBE SPOT 2
3131 PAG. 522

CUBE SPOT MOVE
3121 PAG. 524

CUBE SPOT 2 MOVE
3136 PAG. 524

CUBE SPOT SQ MOVE
3134 PAG. 526

CUBE SPOT SQ 2 MOVE
3135 PAG. 526

CAN REVIEW

CAN REVIEW
20149 PAG. 528

ALDAIA

ALDAIA
20157 PAG.530

ALDAIA SQ
20120 PAG. 532

VADI

VADI
3177 PAG. 534

CASTEJON

CASTEJON
20074 PAG. 536

CASTEJON SQ
20073 PAG. 536

ROY

ROY
20154 PAG. 538

SU

SU
3149 PAG. 540

SU SQ
3150 PAG. 541

SU OTIS
3234 PAG. 542

BASIT

BASIT
8012 PAG. 544

BASIT MOVE
8013 PAG. 544

BASIT MONET
20130 PAG. 546

BASIT MONET 2
20131 PAG. 546

BASIT LLORENS
20140 PAG. 548

BASIT LLORENS SQ
20144 PAG. 548

BASIT DERIN
8010 PAG. 550

RECESSED WITH FRAME

KONI

KONI

3161 PAG. 552

KONI SQ

3169 PAG. 554

KONI DEEP

3171 PAG. 556

KONI TURTA

3156 PAG. 558

CATLI

CATLI

3010 PAG. 560

CATLI SQ

3011 PAG. 562

CATLI SQ2

3012 PAG. 564

CATLI SQ3

3013 PAG. 566

CATLI HALKA

3017 PAG. 568

CATLI HALKA SQ

3021 PAG. 568

CATLI ODALKI

3018 PAG. 570

CATLI CLASSIC

3005 PAG. 572

CATLI CLASSIC SQ

3006 PAG. 574

CATLI CARE

3000 PAG. 576

CATLI CARE 2

3001 PAG. 576

FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm.

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit

ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
CRI 80
Motion Detection
RGB
Wireless Control Options (Casambi)

* Accesories are delivered separately (not installed in luminaire).

ALABAMA

REF 10158.RF

ALUMINIUM PC · 0° · 0° · CRI ≥90 · IK06 · IP20 · IP43 · LIFE 50000H · DIM OPTIONAL · INTEGRATED · INDOOR · 220-240 V 50-60 Hz · CE

INSTALLATIONS

.PN
PENDANT

·10158 ALABAMA | PN
Pag. 78

.SR
SURFACE

·10158 ALABAMA | SR
Pag. 78

.RF
RECESSED FRAME

·10158 ALABAMA | RF
Pag. 396

.TR
TRIMLESS

·10158 ALABAMA | TR
Pag. 580



ALABAMA	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10158	**.35**	●	**.OP .MP**	.ST	.9	**.27**	-	18	500	**.DA .PU .D1**	
							.30	2385				
							.40	2475				
						.8	**.TW** *	-	-	-	-	
					.HI	.9	**.27**	-	35	500	**.DA .PU .D1**	
							.30	4767				
							.40	4956				
	10158	**.45**	●	**.OP .MP**	.ST	.9	**.27**	4590	35	500	**.DA .PU .D1**	
							.30	4770				
							.40	4950				
						.8	**.TW** *	11400 - 11820	76	700	**.DA**	
					.HI	.9	**.27**	9180	71	500	**.DA .PU .D1**	
							.30	9534				
							.40	9912				
	10158	**.65**	●	**.OP .MP**	.ST	.9	**.27**	9180	71	500	**.DA .PU .D1**	
							.30	9540				
							.40	9900				
						.8	**.TW** *	22800-23640	152	700	**.DA**	
					.HI	.9	**.27**	18360	142	500	**.DA .PU .D1**	
							.30	19068				
							.40	19824				
	10158	**.95**	●	**.OP .MP**	.ST	.9	**.27**	16830	130	500	**.DA .PU .D1**	
							.30	17490				
							.40	18150				
						.8	**.TW** *	41800-43340	279	700	**.DA**	
					.HI	.9	**.27**	33660	260	500	**.DA .PU .D1**	
							.30	34958				
							.40	36344				
	10158	**.125**	●	**.OP .MP**	.ST	.9	**.27**	27540	212	500	**.DA .PU .D1**	
							.30	28620				
							.40	29700				
						.8	**.TW** *	68400-70920	457	700	**.DA**	
					.HI	.9	**.27**	55080	425	500	**.DA .PU .D1**	
							.30	57204				
							.40	59472				

Reference order | 10158.XX.RF.XX.XX.XX.X.XX.XX

RECESSED FRAME

.RF

ALABAMA

REF 10158.RF

ALUMINIUM PC · 0° · 0° · CRI ≥90 · IK06 · IP20 · IP43 · L80B10 50000H · DIM OPTIONAL · INTEGRATED · INDOOR · 220-240 V 50-60 Hz · CE

● Select external finishes



.WH-WH .BK-BK .GC-GC .BM-BM .BS-BS .BC-BC .CR-CR .CB-CB .GY-GY .MG-MG .VC-VC .YM-YM

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED

RF INSTALATION KIT

PROFILE

FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm.

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

STANDARD

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit

ON DEMAND

Special Color Temperature
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Accesories are delivered separately (not installed in luminaire).

.RF

RECESSED FRAME

INSTALLATIONS

OHIO

REF 10188.RF

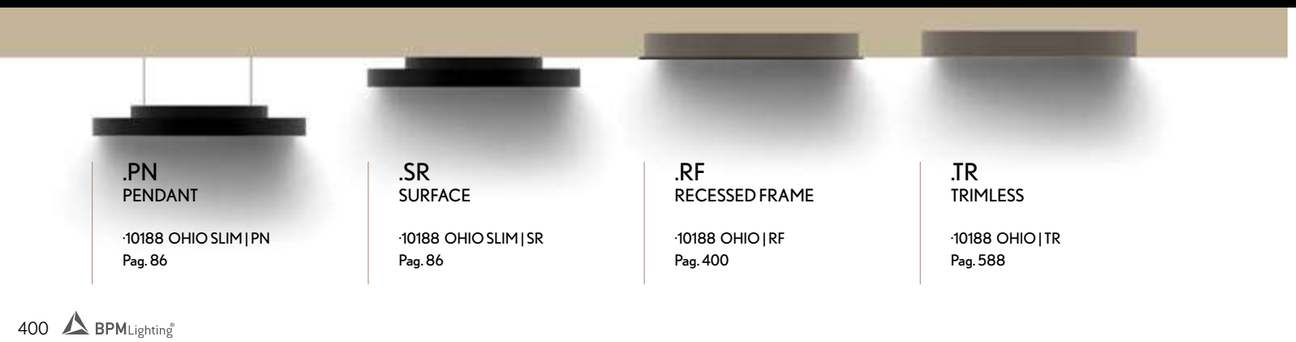

.PN
PENDANT

·10188 OHIO SLIM | PN
Pag. 86

.SR
SURFACE

·10188 OHIO SLIM | SR
Pag. 86

.RF
RECESSED FRAME

·10188 OHIO | RF
Pag. 400

.TR
TRIMLESS

·10188 OHIO | TR
Pag. 588

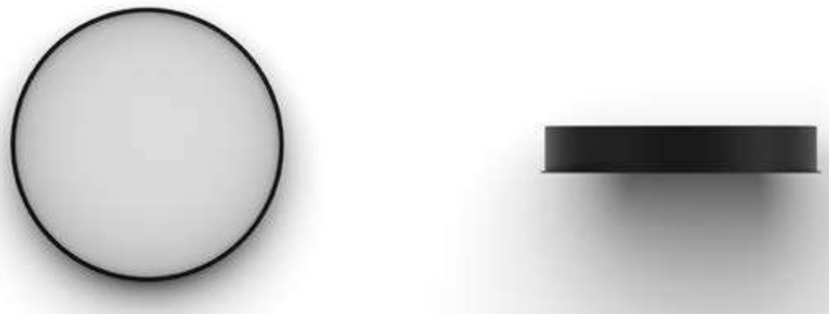

OHIO	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	**10188**	**.35**	●	**.OP .MP**	**.ST**	**.9**	**.27**	2706	27	700	**.DA .PU .D1**	
							.30	2940				
							.40	3000				
	10188	**.45**	●	**.OP .MP**	**.ST**	**.9**	**.27**	4510	45	700	**.DA .PU .D1**	
							.30	4900				
							.40	5000				
	10188	**.65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	10824	109	700	**.DA .PU .D1**	
							.30	11760				
							.40	12000				
	**10188**	**.95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	19844	200	700	**.DA .PU .D1**	
							.30	21560				
							.40	22000				
	10188	**.125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	31570	318	700	**.DA .PU .D1**	
							.30	34300				
							.40	35000				

Reference order | 10188.XX.RF.XX.XX.ST.9.XX.XX

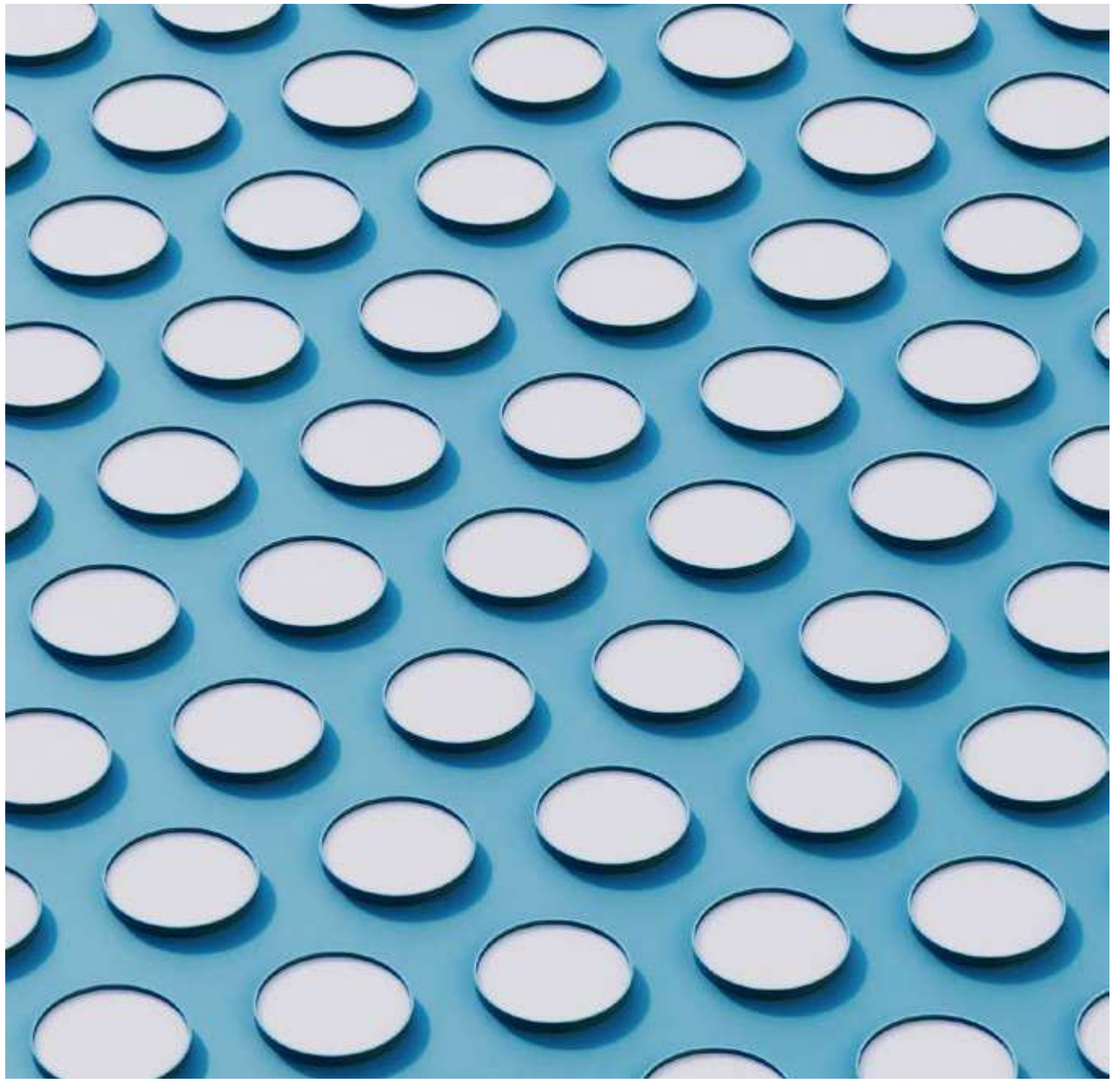

RECESSED FRAME

.RF

● Select finishes



OHIO

REF 10188.RF

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED



RF INSTALATION KIT

PROFILE



FINISHES

● COLORS

DIMENSIONS

⬟ SIZES mm.

366x366 | 466x466 | 666x666 | 966x966 | 1266x1266

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit

ON DEMAND

Special Color Temperature
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Accesories are delivered separately (not installed in luminaire).

.RF

RECESSED FRAME

INSTALLATIONS

OHIO SQ

REF 10204.RF

.RF
RECESSED FRAME

·10204 OHIO SQ | RF
Pag. 404

.TR
TRIMLESS

·10204 OHIO SQ | TR
Pag. 592

OHIO SQ	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10204	**.35**	●	**.OP .MP**	**.ST**	**.9**	**.27**	2706	27	700	**.DA .PU .D1**	
							.30	2940				
							.40	3000				
	10204	**.45**	●	**.OP .MP**	**.ST**	**.9**	**.27**	4510	45	700	**.DA .PU .D1**	
							.30	4900				
							.40	5000				
	10204	**.65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	10824	109	700	**.DA .PU .D1**	
							.30	11760				
							.40	12000				
	10204	**.95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	19844	200	700	**.DA .PU .D1**	
							.30	21560				
							.40	22000				
	10204	**.125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	31570	318	700	**.DA .PU .D1**	
							.30	34300				
							.40	35000				

Reference order ⬟ ● ■ ▼

10204.XX.RF.XX.XX.ST.9.XX.XX

.RF

RECESSED FRAME

● Select finishes



OHIO SQ

REF 10204.RF

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED



RF INSTALATION KIT

PROFILE



8

FINISHES

● EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ DIAMETERS mm.

450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit

ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Accesories are delivered separately (not installed in luminaire).

.RF

RECESSED FRAME

INSTALLATIONS



FLORIDA

REF 10190.RF

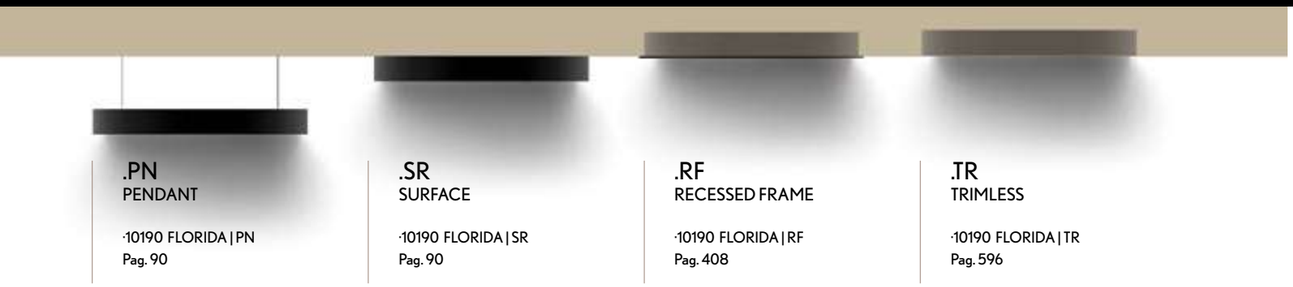

.PN
PENDANT

·10190 FLORIDA | PN
Pag. 90

.SR
SURFACE

·10190 FLORIDA | SR
Pag. 90

.RF
RECESSED FRAME

·10190 FLORIDA | RF
Pag. 408

.TR
TRIMLESS

·10190 FLORIDA | TR
Pag. 596

FLORIDA	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10190	**.45**	●	**.OP .MP**	**.ST**	**.9**	**.27**	4510	45	700	**.DA .PU .D1**	
							.30	4900				
							.40	5000				
	10190	**.65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	10824	109	700	**.DA .PU .D1**	
							.30	11760				
							.40	12000				
	10190	**.95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	19844	200	700	**.DA .PU .D1**	
							.30	21560				
							.40	22000				
	10190	**.125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	31570	318	700	**.DA .PU .D1**	
							.30	34300				
							.40	35000				

Reference order | 10190.XX.RF.XX.XX.ST.9.XX.XX

- Select finishes



FLORIDA

REF 10190.RF

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED



RF INSTALATION KIT

PROFILE



FINISHES

● EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ SIZES mm.

366x366 | 466x466 | 666x666 | 966x966 | 1266x1266

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit

ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Accesories are delivered separately (not installed in luminaire).

.RF

RECESSED FRAME

INSTALLATIONS



FLORIDA SQ

REF 10191.RF

.PN
PENDANT

·10191 FLORIDA SQ | PN
Pag. 94

.SR
SURFACE

·10191 FLORIDA SQ | SR
Pag. 94

.RF
RECESSED FRAME

·10191 FLORIDA SQ | RF
Pag. 412

.TR
TRIMLESS

·10191 FLORIDA SQ | TR
Pag. 600

FLORIDA SQ	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10191	.35	●	.OP .MP	.ST	.9	.27	2706	27	700	.DA .PU .D1	
							.30	2940				
							.40	3000				
	10191	.45	●	.OP .MP	.ST	.9	.27	5412	55	700	.DA .PU .D1	
							.30	5880				
							.40	6000				
	10191	.65	●	.OP .MP	.ST	.9	.27	10824	109	700	.DA .PU .D1	
							.30	11760				
							.40	12000				
	10191	.95	●	.OP .MP	.ST	.9	.27	21648	218	700	.DA .PU .D1	
							.30	23520				
							.40	24000				
	10191	.125	●	.OP .MP	.ST	.9	.27	36080	364	700	.DA .PU .D1	
							.30	39200				
							.40	40000				

Reference order | 10191.XX.RF.XX.XX.ST.9.XX.XX

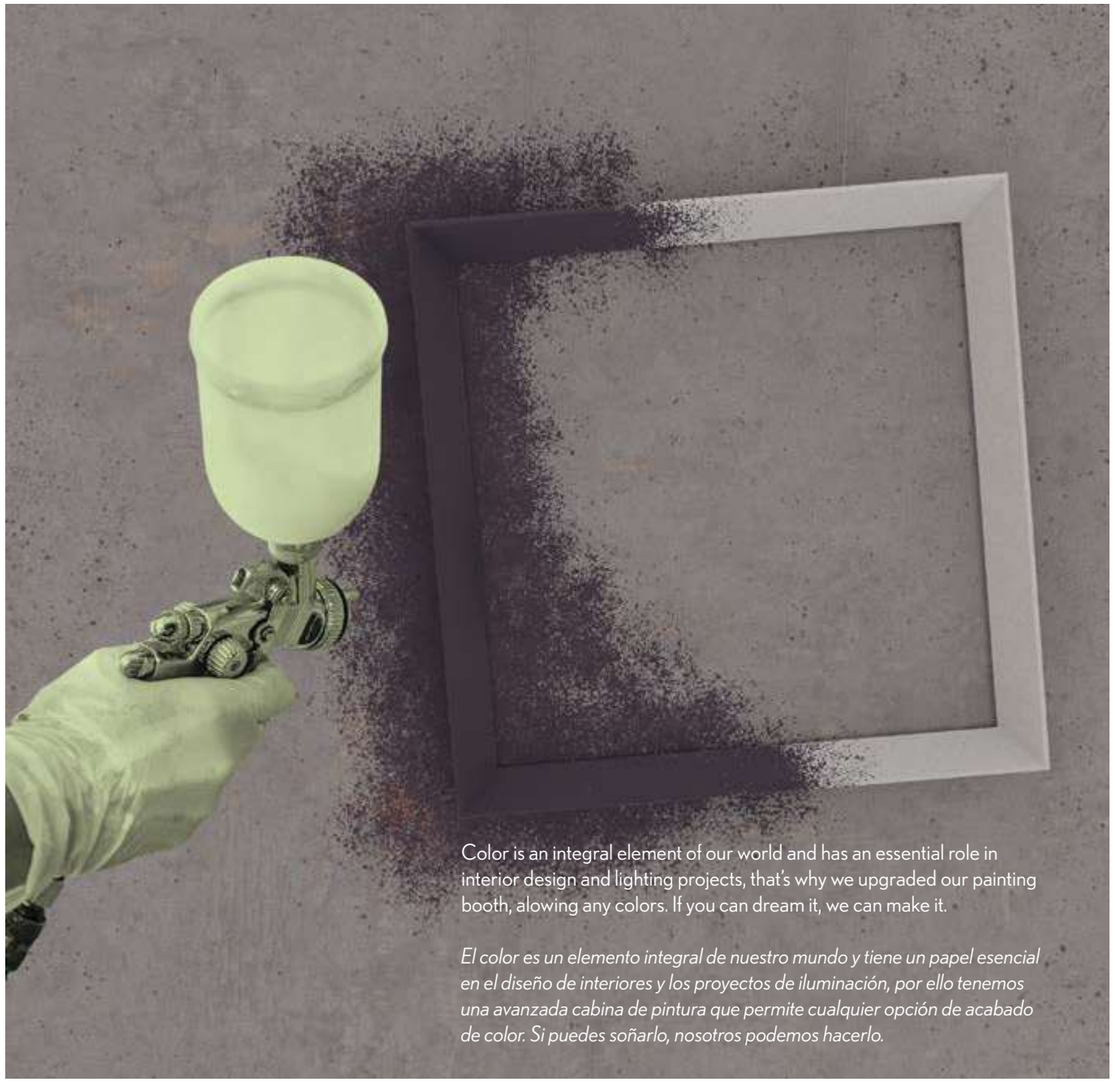

Color is an integral element of our world and has an essential role in interior design and lighting projects, that's why we upgraded our painting booth, alowing any colors. If you can dream it, we can make it.

El color es un elemento integral de nuestro mundo y tiene un papel esencial en el diseño de interiores y los proyectos de iluminación, por ello tenemos una avanzada cabina de pintura que permite cualquier opción de acabado de color. Si puedes soñarlo, nosotros podemos hacerlo.

- Select finishes

FLORIDA SQ

REF 10191.RF

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED

RF INSTALATION KIT

PROFILE



FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm.

350 | 450 | 650 | 950 | 1250 | 1500

2000 | 2500 | 3000 | 3500 | 4000 | 5000 | 6000

LIGHTING OPTIONS

■ DIFFUSERS

SILICONE

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

REMOTE

ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Tunable White
RGB
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

new

.RF

RECESSED FRAME

INSTALLATIONS

ALUMINIUM SILICONE · 0° · 0° · CRI ≥90 · IK06 · IP20 IP43 · LIFE 50000H · DIM OPTIONAL · REMOTE · INDOOR · 220-240 V 50-60 Hz · CE

ALBERTA SOFT

REF 10217.RF

.PN
PENDANT

·10217 ALBERTA SOFT | PN
Pag. 118

.SR
SURFACE

· 10217 ALBERTA SOFT | SR
Pag. 118

.RF
RECESSED FRAME

·10217 ALBERTA SOFT | RF
Pag. 416

ALBERTA SOFT	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10217	**.35**	●	**.SI**	.HI	.9	.27	5280	56	700	**.DA .PU .D1**	 INT. Ø 282 | EXT. Ø 354 70 45 INT. Ø 286 EXT. Ø 350
							.30	5316				
							.40	5844				
	10217	**.45**	●	**.SI**	.HI	.9	.27	7086	70	700	**.DA .PU .D1**	 INT. Ø 382 | EXT. Ø 454 70 45 Int. Ø 386 Ext. Ø 450
							.30	7121				
							.40	7747				
	10217	**.65**	●	**.SI**	.HI	.9	.27	8785	86	700	**.DA .PU .D1**	 INT. Ø 582 | EXT. Ø 654 70 45 Int. Ø 586 Ext. Ø 650
							.30	9040				
							.40	9687				
	10217	**.95**	●	**.SI**	.HI	.9	.27	13298	129	700	**.DA .PU .D1**	INT. Ø 882 | EXT. Ø 954 70 45 Ø INT. 886 Ø EXT. 950
							.30	13519				
							.40	14703				
	10217	**.125**	●	**.SI**	.HI	.9	.27	17816	172	700	**.DA .PU .D1**	 INT. Ø 1182 | EXT. Ø 1254 70 45 Ø INT. 1186 Ø EXT. 1250
							.30	18135				
							.40	18118				
	10217	**.150**	●	**.SI**	.HI	.9	.27	-	185	500	**.DA .PU .D1**	 INT. Ø 1432 | EXT. Ø 1504 70 45 Int. Ø 1436 Ext. Ø 1500
							.30	25440				
							.40	26400				

Reference order | 10217.XX.RF.XX.XX.HI.9.XX.XX

	10217	**.200**	●	**.SI**	.HI	.9	.27	-	253	500	**.DA .PU .D1**	 INT. Ø 1932 | EXT. Ø 2004 70 45 Int. Ø 1936 Ext. Ø 2000
							.30	34185				
							.40	35475				
	10217	**.250**	●	**.SI**	.HI	.9	.27	-	318	500	**.DA .PU .D1**	 INT. Ø 2432 | EXT. Ø 2504 70 45 Ø INT. 2436 Ø EXT. 2500
							.30	42930				
							.40	44550				
	10217	**.300**	●	**.SI**	.HI	.9	.27	-	383	500	**.DA .PU .D1**	 INT. Ø 2932 | EXT. Ø 3004 70 45 Ø INT. 2936 Ø EXT. 3000
							.30	51675				
							.40	53625				
	10217	**.350**	●	**.SI**	.HI	.9	.27	-	433	700	**.DA .PU .D1**	 INT. Ø 3432 | EXT. Ø 3504 70 45 Ø INT. 3436 Ø EXT. 3500
							.30	59875				
							.40	62843				
	10217	**.400**	●	**.SI**	.HI	.9	.27	-	513	500	**.DA .PU .D1**	 INT. Ø 3932 | EXT. Ø 4004 70 45 Ø INT. 3936 Ø EXT. 4000
							.30	86655				
							.40	89925				
	10217	**.500**	●	**.SI**	.HI	.9	.27	-	643	500	**.DA .PU .D1**	 INT. Ø 4932 | EXT. Ø 5004 70 45 Ø INT. 4936 Ø EXT. 5000
							.30	86655				
							.40	89925				
	10217	**.600**	●	**.SI**	.HI	.9	.27	-	772	500	**.DA .PU .D1**	 INT. Ø 5932 | EXT. Ø 6004 70 45 Ø INT. 5936 Ø EXT. 6000
							.30	104145				
							.40	108075				

Reference order | 10217.XX.RF.XX.XX.HI.9.XX.XX

RECESSED FRAME

.RF

● Select finishes

ALBERTA SOFT

REF 10217.RF

PHOTOMETRY

SILICONE

INCLUDED



RF INSTALATION KIT

PROFILE



FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm.

650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit

ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
CRI 80
Motion Detection
RGB
Wireless Control Options (Casambi)
Other Dimensions

* Accesories are delivered separately (not installed in luminaire).

.RF

RECESSED FRAME

ALBERTA

REF 10176.RF

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK08 | IP20 IP43 | LIFE 50000H | DIM OPTIONAL | INTEGRATED | INDOOR | 220-240 V 50-60 Hz | CE

INSTALLATIONS

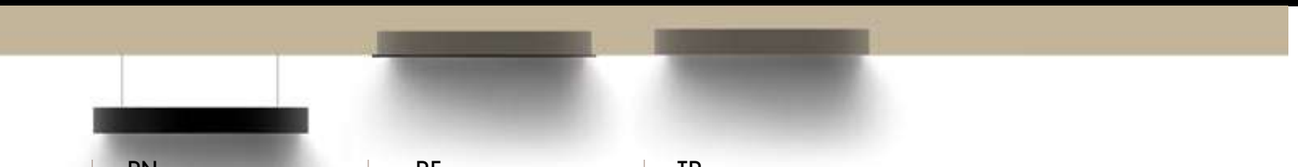

.PN
PENDANT

·10176 ALBERTA | PN
Pag. 132

.RF
RECESSED FRAME

·10176 ALBERTA | RF
Pag. 420

.TR
TRIMLESS

·10176 ALBERTA | TR
Pag. 604



ALBERTA	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10176	.65	●	.OP .MP	.ST	.9	.27	3060	24	500	.DA .PU .D1	
							.30	3180				
							.40	3300				
						.8	.TW *1	9500 - 9850	64	700	.DA	
					.HI	.9	.27	-	59	500	.DA .PU .D1	
							.30	6356				
							.40	6608				
	10176	.95	●	.OP .MP	.ST	.9	.27	6120	47	500	.DA .PU .D1	
							.30	6360				
							.40	6600				
						.8	.TW *1	15200 - 15760	102	700	.DA	
					.HI	.9	.27	-	94	500	.DA .PU .D1	
							.30	12712				
							.40	13216				
	10176	.125	●	.OP .MP	.ST	.9	.27	9180	71	500	.DA .PU .D1	
							.30	9540				
							.40	9900				
						.8	.TW *1	22800-23640	152	700	.DA	
					.HI	.9	.27	-	142	500	.DA .PU .D1	
							.30	19068				
							.40	19824				

Reference order | 10176.XX.RF.XX.XX.XX.X.XX.XX

- Select finishes



ALBERTA

REF 10176.RF

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED



RF INSTALATION KIT

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700*mA.

A blank canvas.

There are no limits Don't worry about lighting. Imagine the end result and use our Line profiles to make it happen. Few collections can be combined in so many ways to create so many looks and fulfil so many functions. It's the joker in the pack for designing unique spaces..

When it comes to technology, there's no shortage of features: With options for indirect light, dimmer, tunable white, RedUGeR®, customisable technology... and more.

Un lienzo en blanco.

Vía libre. No pensar en las luminarias. Pensar en el resultado final, y nuestra perfilería lineal se adaptará a ello. Pocas colecciones se prestan a tantas combinaciones, tanto estéticas como de funcionamiento, por ello es un comodín a la hora de diseñar espacios que requieren de un plus de singularidad.

A nivel técnico, un auténtico compendio de ventajas: Capacidad de incorporar luz indirecta, regulaciones, blanco dinámico, RedUGeR® ,personalizable en aspectos técnicos... entre otros muchos beneficios.

LINES

RECESSED WITH FRAME

ALARIK SLIM

Mastering light has never been so easy

Alarik is a set of modular designs for building or simplifying your lighting scheme. With Mini and Slim versions - and their own subfamilies - they adapt to every need.

It's playtime! Lighting design with Alarik is an exercise is creativity. Freedom, functionality, uniqueness... In short, unbridled flexibility and total control over the final result.

Jugar con luz nunca ha sido tan fácil

Alarik combina referencias modulares que permiten crecer o simplificar los puntos de luz, así como versiones Mini y Slim – a la vez con sus propias subfamilias - que se adaptan a cada necesidad.

¡Que empiece el juego!. Iluminar con Alarik es lo más parecido a un ejercicio de ingenio. Libertad, funcionalidad, singularidad... en definitiva, diseño sin ataduras y siempre con el control absoluto del resultado a obtener.

BPMLighting®

FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS

PER METER

COMPONENTS

SLIM PATRICIA
SLIM PATRICIA ZOOM
SLIM LED BALL
SLIM TUBE
SLIM WALL WASHER
SLIM LENSES
SLIM MOTION LENSES
SLIM LED MODULES

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit

new

MAGNET

48V. REMOTE

ON DEMAND

Taylor your own design

.RF

RECESSED FRAME

ALARIK SLIM

REF 20224.RF

INSTALLATIONS

.PN
PENDANT

·20224 ALARIK SLIM | PN
Pag. 178

.SR
SURFACE

·20224 ALARIK SLIM | SR
Pag. 178

.RF
RECESSED FRAME

·20224 ALARIK SLIM | RF
Pag. 428

.TR
TRIMLESS

·20224 ALARIK SLIM | TR
Pag. 622

ALARIK SLIM	REF.	DIMEN-SION ⬟	FINISH ●	SKETCH
	20224	**.01** 1 mt.	●	

Reference order | 20224.XX.RF.XX

48V TRANSFORMER	DIMENSION ⬟	WATT
DR48	**.01**	75
	.02	120
	.03	200

Reference order | DR48.XX

INTEGRATED POWER	REF.	WATT
	10246.DR (404x43x22mm)	200W

Reference order | 10246.DR

SLIM PATRICIA	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K ▼	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11544	**.01**	●	**.15 .38 .60**	.ST	.9	.27	576	8	48	**.DA .D1**	
							.30	607				
							.40	695				
	11544	**.02**	●	**.15 .38 .60**	.ST	.9	.27	1173	15	48	**.DA .D1**	
							.30	1181				
							.40	1207				

Reference order | 11544.XX.XX.XX.ST.9.XX.XX

SLIM PATRICIA ZOOM	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K ▼	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11546	**.01**	●	**.15-36 .36-60**	.ST	.9	.27	2038	25	48	**.DA .D1**	
							.30	2254				
							.40	2320				

Reference order | 11546.01.XX.XX.ST.9.XX.XX

SLIM LED BALL	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11551	**.01**	●	**.37**	.ST	.9	.27	355	8	48	**.DA .D1**	
							.30	383				
							.40	396				

Reference order | 11551.01.XX.XX.ST.9.XX.XX

SLIM LED TUBE 20	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K ▼	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11553	**.01**	●	**.20 .40**	.ST	.9	.27	174	3	48	**.DA .D1**	
							.30	187				
							.40	212				

Reference order | 11553.01.XX.XX.ST.9.XX.XX

SLIM LED TUBE 40	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K ▼	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11552	**.01**	●	**.20 .40**	.ST	.9	.27	954	14	48	**.DA .D1**	
							.30	991				
							.40	1067				

Reference order | 11552.01.XX.XX.ST.9.XX.XX

SLIM WALL WASHER	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K ▼	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11550	**.01**	**.BK-BK**	**-**	.ST	.9	.27	882	15	48	**.DA .D1**	
							.30	1013				
							.40	1107				

Reference order | 11550.01.XX.XX.ST.9.XX.XX

SLIM LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K ▼	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11548	**.01**	**.BK-BK**	**.15 .38**	.ST	.9	.27	660	8	48	**.DA .D1**	
							.30	750				
							.40	827				
	11548	**.02**	**.BK-BK**	**.15 .38**	.ST	.9	.27	1320	15	48	**.DA .D1**	
							.30	1511				
							.40	1654				

Reference order | 11548.XX.XX.XX.ST.9.XX.XX

RECESSED FRAME

.RF

● Select finish

.WH-WH .BK-BK

ALARIK
SLIM

REF 20224.RF

PHOTOMETRY

SLIM PATRICIA

15º 36º 38º 60º

PHOTOMETRY

SLIM LED BALL SLIM WALL WASHER

37º

PHOTOMETRY

SLIM TUBE | SLIM LENSES

20º 40º

SLIM MOTION LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11547	**.01**	**.BK-BK**	**.15** **.38**	.ST	.9	**.27**	660	8	48	**.DA** **.D1**	
							.30	750				
							.40	827				

Reference order | 11547.01.XX.XX.ST.9.XX.XX

SLIM LED MODULES	REF.	DIMEN-SION ⬟	FINISH ●	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11549	**.01**	**.BK-BK**	**.OP**	.ST	.9	**.27**	558	9	48	**.DA** **.D1**	
							.30	560				
							.40	604				
	11549	**.02**	**.BK-BK**	**.OP**	.ST	.9	**.27**	1115	18	48	**.DA** **.D1**	
							.30	1120				
							.40	1208				
	11549	**.03**	**.BK-BK**	**.OP**	.ST	.9	**.27**	1670	24	48	**.DA** **.D1**	
							.30	1680				
							.40	1812				

Reference order | 11549.XX.XX.XX.ST.9.XX.XX

Total length = Profile length + 2x8mm (Cover kit)

(Total length - 8mm) x 30mm

90mm

● Select finish

.WH-WH .BK-BK

COMPONENTS

COVERT KIT	REF.	FINISH
	TF19	●

Reference order | TF19.RF.XX

JOINTS & CONNECTORS

LINEAR JOINT CONNECTOR	FINISH ●	ANGLE JOINT CONNECTOR	FINISH ●
	**.BK-BK**		**.BK-BK**

ACC20224.UR.XX ACC20224.UL.XX

POWER FEEDER UNIT	FINISH ●
	**.BK-BK**

ACC20224.CA.XX

LINEAR JOINT	ANGLE JOINT	WALL-CEILING JOINT

UR19 UL19 UV19

IP20 IP23 · LIFE 50000H · DIM OPTIONAL · 48V. REMOTE · 220-240 V 50-60 Hz

ALARIK
SLIM

REF 20224.RF

PHOTOMETRY

OPAL

INCLUDED



RF INSTALATION KIT

PROFILE



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS

PER METER

COMPONENTS

LED MODULES
LENSES
MINI TUBE
MINI TUBE STICK

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit

ON DEMAND

Special Shapes
Emergency Lighting*
Motion Detection
Taylor your own design
Special RAL Color
Tunable White

* Delivered separately
(not installed in luminaire).

RECESSED FRAME

MODULIGHT

REF 10210.RF

INSTALLATIONS

.PN
PENDANT

·10210 MODULIGHT | PN
Pag. 196

.SR
SURFACE

·10210 MODULIGHT | SR
Pag. 196

.RF
RECESSED FRAME

·10210 MODULIGHT | RF
Pag. 434

.TR
TRIMLESS

·10210 MODULIGHT | TR
Pag. 634



MODULIGHT	REF.	DIMEN-SION ⬟	FINISH ●	SKETCH
	**10210**	**.01** 1m	●	

Reference order | 10210.XX.RF.XX

DRIVER	DIMENSION*1 ⬟		DIMM ▼
DR10210	**.01**	0 - 15 W	**.DA .PU .D1**
	.02	16 - 30 W	
	.03	31 - 65 W	
	.04	66 - 90 W	

Reference order | DR10210.XX.XX

MINI TUBE	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11526	**.01**	**.BK-BK .WH-WH**	**.15 .24 .38**	**.ST**	**.9**	**.27**	348	8	700	
							.30	362			
							.40	421			

Reference order | 11526.01.XX.XX.ST.9.XX

MINI TUBE STICK	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11538	**.01**	**.BK-BK .WH-WH**	**.15 .24 .38**	**.ST**	**.9**	**.27**	348	8	700	
							.30	362			
							.40	421			

Reference order | 11538.01.XX.XX.ST.9.XX

Modular system that requires a technical drawing

*1 Driver power must be at least 15% higher than the sum of the power of selected LED modules. *La potencia del driver deber ser por lo menos un 15% mayor que la suma de la potencia de los modulos LED elegidos.*

LENSES	REF.	DIMEN-SIONS ⬟	SHAPE ◗	FINISH ●	OPTIC OPTIONS ■	POW-ER	CRI	K	LUMEN	WATT	mA	SKETCH
	**11525**	**.01** 29mm.	**.RD .SQ**	●	**.20 .40 .60**	**.ST**	**.9**	**.27**	142	2	700	
								.30	161			
								.40	212			
	11525	**.03** 80mm.	**.RD .SQ**	●	**.20 .40 .60**	**..ST**	**.9**	**.27**	426	6	700	
								.30	483			
								.40	636			
	11525	**.05** 133mm.	**.RD .SQ**	●	**.20 .40 .60**	**.ST**	**.9**	**.27**	710	10	700	
								.30	805			
								.40	1060			
	11525	**.10** 263mm.	**.RD .SQ**	●	**.20 .40 .60**	**.ST**	**.9**	**.27**	1420	20	700	
								.30	1611			
								.40	2120			

Reference order | 11525.XX.XX.XX.XX.ST.9.XX

COVER	REF.	FINISH ●
	ACC10210.01	**.WH-WH .BK.BK**

Reference order | ACC10210.01.XX

ROUND .RD
26x29,3 mm
Int Ø14,5 - Ext. Ø23 mm

SQUARE .SQ
26x29,3 mm
Ø14,5 mm

● Select lens finishes

MODULIGHT

REF 10210.RF

PHOTOMETRY

MINI TUBE

15º 24º 38º

PHOTOMETRY

LENSES

20º 40º 60º

LED MODULES	REF.	DIMEN-SION ⬟	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11524	**.01** 281mm.	**.OP .MP**	**.HI**	**.9**	**.27**	953	12	700	
						.30	972			
						.40	1141			
	11524	**.02** 562mm.	**.OP .MP**	**.HI**	**.9**	**.27**	1906	24	700	
						.30	1944			
						.40	2282			
	11524	**.03** 843mm.	**.OP .MP**	**.HI**	**.9**	**.27**	2859	36	700	
						.30	2916			
						.40	3423			
	11524	**.04** 1124mm.	**.OP .MP**	**.HI**	**.9**	**.27**	3812	48	700	
						.30	3888			
						.40	4564			
	11524	**.05** 1405mm.	**.OP .MP**	**.HI**	**.9**	**.27**	4765	60	700	
						.30	4860			
						.40	5705			
	11524	**.06** 1686mm.	**.OP .MP**	**.HI**	**.9**	**.27**	5718	72	700	
						.30	5832			
						.40	6846			



Reference order | 11524.XX.XX.HI.9.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF23	●

Reference order | TF23.RF.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
		X	**X**		●
UR23	**UL23**	**X**	**X**	**UV23**	

Reference order | XX23.RF.XX

● Select finish

MODULIGHT

REF 10210.RF

PHOTOMETRY

LED MODULES



OPAL | MICROPRISMATIC

INCLUDED



RF INSTALATION KIT

PROFILE



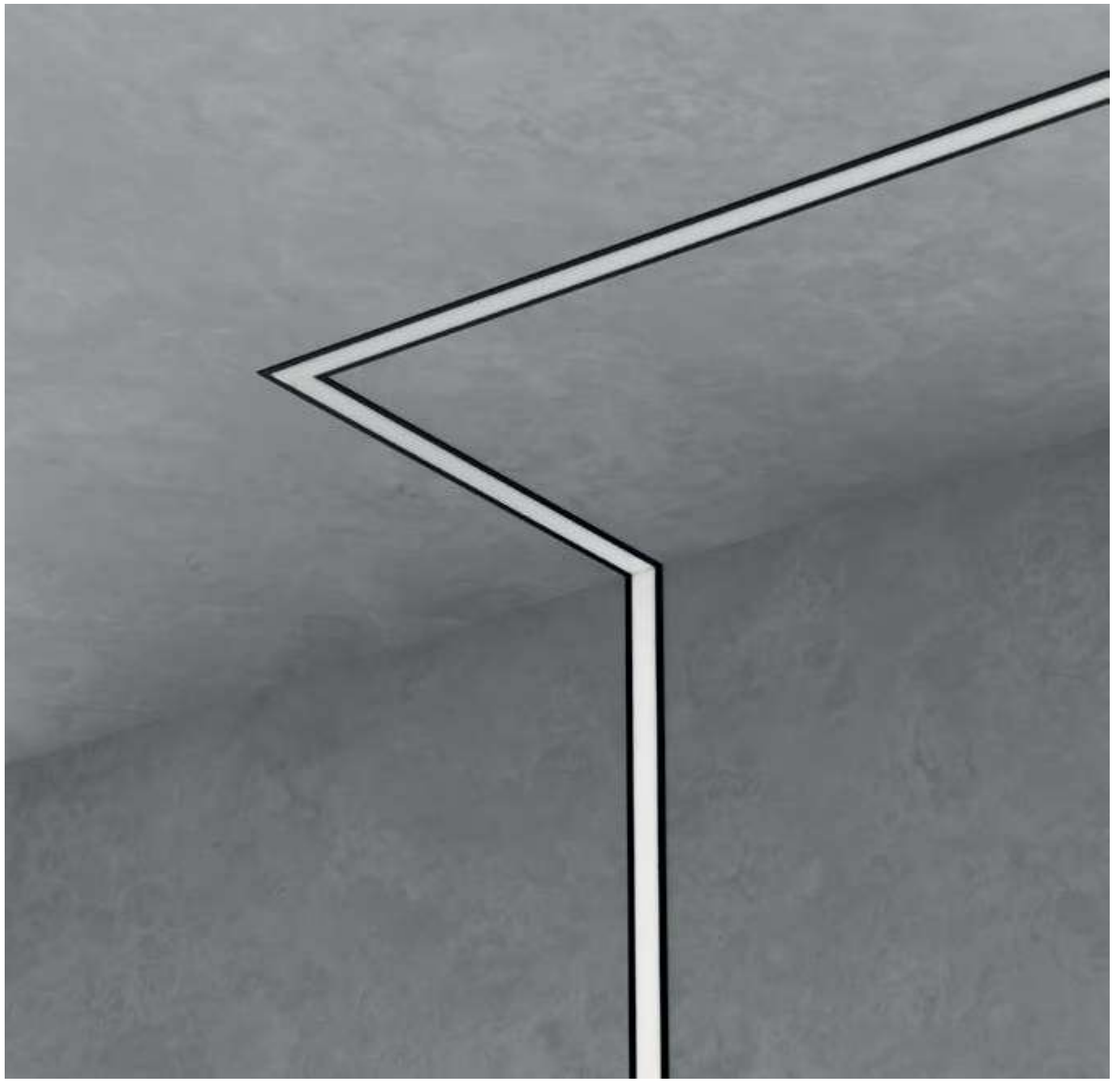

FINISHES

● COLORS

DIMENSIONS

⬟ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit

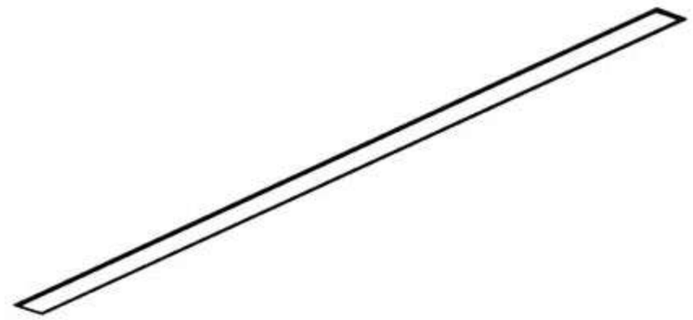

REMOTE

ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

ALBA
MINI

REF 10211.RF

.PN
PENDANT

·10211 ALBA MINI | PN
Pag. 226

.SR
SURFACE

·10211 ALBA MINI | SR
Pag. 226

.RF
RECESSED FRAME

·10211 ALBA MINI | RF
Pag. 440

.TR
TRIMLESS

·10211 ALBA MINI | TR
Pag. 640



REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
10211	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	
	.05	1405					3825	3975	4125	9500-9850	30	64	
	.06	1686					4590	4770	4950	11400-11820	35	76	
	.07	1967					5355	5565	5775	13300-13790	41	89	
	.08	2248					6120	6360	6600	15200-15760	47	102	

REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
10211	.03	843	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1124					6120	6356	6608	47	
	.05	1405					7650	7945	8260	59	
	.06	1686					9180	9534	9912	71	
	.07	1967					10710	11123	11564	83	
	.08	2248					12240	12712	13216	94	

Reference order | 10211.XX.RF.XX.XX.XX.9.XX.XX

Total length = Profile length + 25mm + 2x8mm (Cover kit)

+ Linear Joint Total length = Profile length + 25mm + [2 x 8mm (Cover kit)] + [Nº of UR03 x 8]

Joints, other than Linear joint, require a technical drawing

(Total length - 8mm) x 38mm

70mm

COMPONENTS

COVERT KIT	REF.	FINISH
	TF03 2x8mm.	●

Reference order | TF03.RF.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
					●
UR03	UL03	UT03	UC03	UV03	

Reference order | XX03.RF.XX

RECESSED FRAME

.RF

● Select finish

ALBA MINI

REF 10211.RF

PHOTOMETRY

OPAL | MICROPRISMATIC

INCLUDED



RF INSTALATION KIT

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700mA.*

*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

FINISHES

● COLORS

DIMENSIONS

⬟ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit

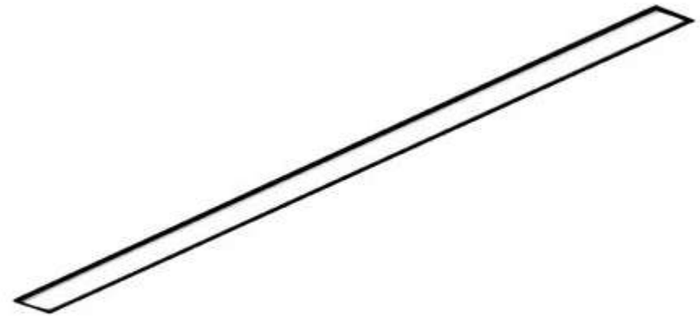



ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

RECESSED FRAME

ALBA

REF 10160.RF

INSTALLATIONS

.PN
PENDANT

·10160 ALBA | PN
Pag. 230

.WS
WALL SURFACE

·10160 ALBA | WS
Pag. 786

.TK
TRACK

·10160 ALBA | TK
Pag. 760

.SR
SURFACE

·10160 ALBA | SR
Pag. 230

.RF
RECESSED FRAME

·10160 ALBA | RF
Pag. 444

.TR
TRIMLESS

·10160 ALBA | TR
Pag. 644



REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
10160	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	
	.05	1405					3825	3975	4125	9500-9850	30	64	
	.06	1686					4590	4770	4950	11400-11820	35	76	
	.07	1967					5355	5565	5775	13300-13790	41	89	
	.08	2248					6120	6360	6600	15200-15760	47	102	

REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
10160	.03	843	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1124					6120	6356	6608	47	
	.05	1405					7650	7945	8260	59	
	.06	1686					9180	9534	9912	71	
	.07	1967					10710	11123	11564	83	
	.08	2248					12240	12712	13216	94	

Reference order | 10160.XX.RF.XX.XX.XX.9.XX.XX

Total length = Profile length + 10mm + 2x8mm (Cover kit)
(Total length - 8mm) x 51mm
100mm

COMPONENTS

COVERT KIT	REF.	FINISH
	TF02 2x8mm.	●

Reference order | TF02.RF.XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
					●
UR02	UA02	UT02	UX02	UV02	

Joints, other than Linear joint, require a technical drawing

Reference order | XX02.RF.XX

● Select finish

ALBA

REF 10160.RF

PHOTOMETRY

OPAL | MICROPRISMATIC

INCLUDED



RF INSTALATION KIT

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700mA.*
*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

FINISHES

● EXTERNAL COLOR

INTERNAL COLOR

⬟ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

TRANSPARENT

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

ASYMETRIC DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit

new

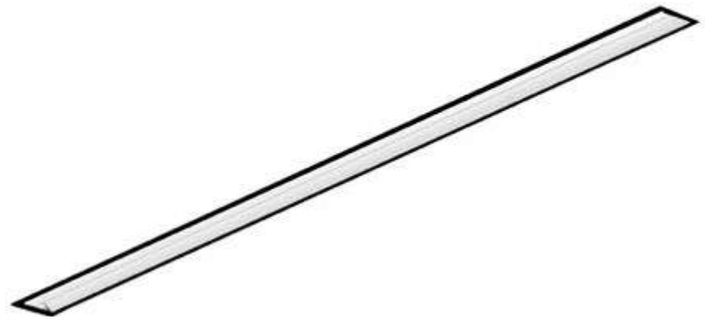

ON DEMAND

Emergency Lighting*
Well-Certified LED Boards
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

.RF

RECESSED FRAME

INSTALLATIONS

ALBA
ASIMETRIC

REF 210009.RF

.PN
PENDANT

·210009 ALBA ASIMETRIC
| PN - Pag. 242

.WS
WALL SURFACE

·210009 ALABA ASIMETRIC
| WS - Pag. 794

.SR
SURFACE

·210009 ALBA ASIMETRIC
| SR - Pag. 242

.RF
RECESSED FRAME

·210009 ALBA ASIMETRIC
| RF - Pag. 448

.TR
TRIMLESS

·210009 ALBA ASIMETRIC
| TR - Pag. 648



REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
210009	.03	843	●	.TP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	
	.05	1405					3825	3975	4125	9500-9850	30	64	
	.06	1686					4590	4770	4950	11400-11820	35	76	
	.07	1967					5355	5565	5775	13300-13790	41	89	
	.08	2248					6120	6360	6600	15200-15760	47	102	

REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
210009	.03	843	●	.TP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1124					6120	6356	6608	47	
	.05	1405					7650	7945	8260	59	
	.06	1686					9180	9534	9912	71	
	.07	1967					10710	11123	11564	83	
	.08	2248					12240	12712	13216	94	

Reference order | 210009.XX.RF.XX.XX.XX.X.XX.XX

Total length = Profile length + 10mm + 2x8mm (Cover kit)
(Total length - 8mm) x 51mm
100mm

COMPONENTS

COVERT KIT	REF.	FINISH
	TF06 2x8mm.	●

Reference order | TF06.RF.XX

JOINTS

LINEAR JOINT
UR06

RECESSED FRAME

.RF

● Select finish

ALBA
ASIMETRIC

REF 210009.RF

PHOTOMETRY

TRANSPARENT PC

INCLUDED



RF INSTALATION KIT

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700mA.*
*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

FINISHES

● COLORS

DIMENSIONS

⬟ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit

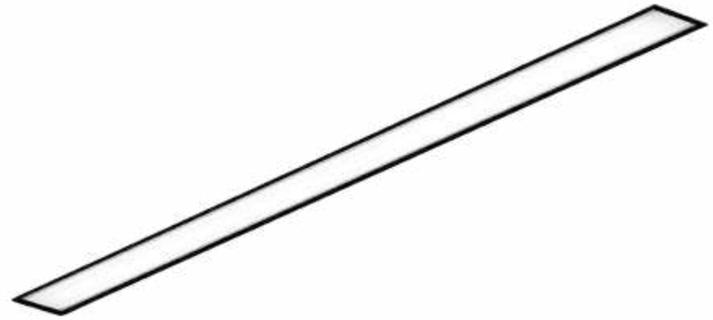

ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

ALBA PLUS

REF 10178.RF

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06 | IP20 IP43 | LIFE 50000H | DIM OPTIONAL | INTEGRATED | INDOOR | 220-240 V 50-60 Hz | CE

INSTALLATIONS

.PN
PENDANT

·10178 ALBA PLUS | PN
Pag. 246

.TK
TRACK

·10178 ALBA PLUS | TK
Pag. 764

.SR
SURFACE

·10178 ALBA PLUS | SR
Pag. 246

.RF
RECESSED FRAME

·10178 ALBA PLUS | RF
Pag. 452

.TR
TRIMLESS

·10178 ALBA PLUS | TR
Pag. 652



REF.	PROFILE LENGTH ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
10178	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	5700-8520	18	38	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-11360	24	51	
	.05	1405					3825	3975	4125	9500-14200	30	64	
	.06	1686					4590	4770	4950	11400-17040	35	76	
	.07	1967					5355	5565	5775	13300-19880	41	89	
	.08	2248					6120	6360	6600	15200-22720	47	102	

REF.	PROFILE LENGTH ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
10178	.03	843	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1124					6120	6356	6608	47	
	.05	1405					7650	7945	8260	59	
	.06	1686					9180	9534	9912	71	
	.07	1967					10710	11123	11564	83	
	.08	2248					12240	12712	13216	94	

Reference order | 10178.XX.RF.XX.XX.XX.9.XX.XX

Total length = Profile length + 10mm + 2x8mm (Cover kit)
(Total length - 8mm) x 73mm
120mm

COMPONENTS

COVERT KIT	REF.	FINISH
	TF01 2x8mm.	●

Reference order | TF01.RF.XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
					●
UR01	UL01	UT01	UC01	UV01	

Joints, other than Linear joint, require a technical drawing

Reference order | XX01.RF.XX

● Select finish

ALBA PLUS

REF 10178.RF

PHOTOMETRY

OPAL MICROPRISMATIC

INCLUDED



RF INSTALATION KIT

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700mA.*
*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

FINISHES

● EXTERNAL COLOR

INTERNAL COLOR

⬟ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

TRANSPARENT

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

ASYMETRIC DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit

new

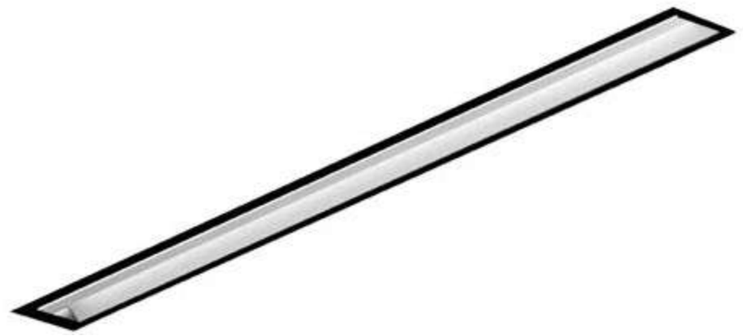

ON DEMAND

Emergency Lighting*
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80
Motion Detection

* Delivered separately
(not installed in luminaire).

.RF

RECESSED FRAME

ALBA
PLUS ASIMETRIC

REF 210008.RF

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06 | IP20 IP43 | LIFE 50000H | DIM OPTIONAL | INTEGRATED | INDOOR | 220-240 V 50-60 Hz | CE

INSTALLATIONS

.PN
PENDANT

·210008 ALBA PLUS ASIMETRIC | PN - Pag. 250

.SR
SURFACE

·210008 ALBA PLUS ASIMETRIC | SR - Pag. 250

.RF
RECESSED FRAME

·210008 ALBA PLUS ASIMETRIC | RF - Pag. 456

.TR
TRIMLESS

·210008 ALBA PLUS ASIMETRIC | TR - Pag. 656



REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
210008	.03	843	●	.TP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	
	.05	1405					3825	3975	4125	9500-9850	30	64	
	.06	1686					4590	4770	4950	11400-11820	35	76	
	.07	1967					5355	5565	5775	13300-13790	41	89	
	.08	2248					6120	6360	6600	15200-15760	47	102	

REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
210008	.03	843	●	.TP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1124					6120	6356	6608	47	
	.05	1405					7650	7945	8260	59	
	.06	1686					9180	9534	9912	71	
	.07	1967					10710	11123	11564	83	
	.08	2248					12240	12712	13216	94	

Reference order | 210008.XX.RF.XX.XX.XX.X.XX.XX

Total length = Profile length + 10mm + 2x8mm (Cover kit)
(Total length - 8mm) x 73mm
120mm

COMPONENTS

COVERT KIT	REF.	FINISH
	TF05 2x8mm.	●

Reference order | TF05.RF.XX

JOINTS

LINEAR JOINT
UR05

.RF

RECESSED FRAME

● Select finish

ALBA
PLUS ASIMETRIC

REF 210008.RF

PHOTOMETRY

TRANSPARENT PC

INCLUDED



RF INSTALATION KIT

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700mA.*
*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

FINISHES

● COLORS

DIMENSIONS

⬟ PROFILE LENGTHS mm.

843	1124	1405	1686
800	1520	2950	5100

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit

SOON

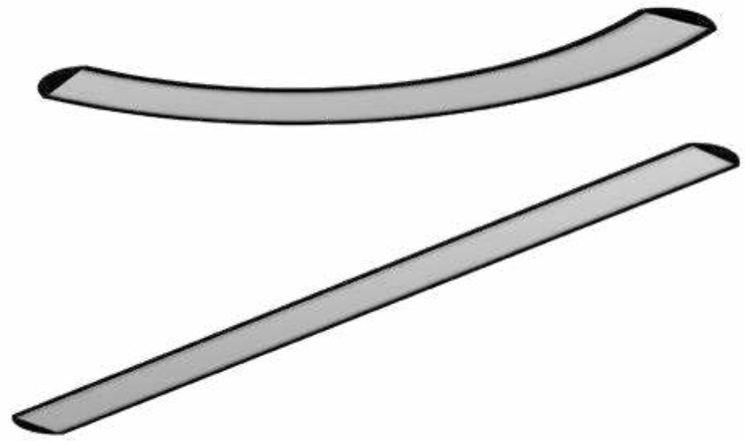

ON DEMAND

Emergency Lighting *
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

RECESSED FRAME

BOLD | BOLD LINE

REF 210001.RF | 210015.RF

INSTALLATIONS

.PN
PENDANT

·210001 BOLD ·210015 BOLD LINE | PN
Pag. 254

.SR
SURFACE

·210001 BOLD ·210015 BOLD LINE | SR
Pag. 254

.RF
RECESSED FRAME

·210001 BOLD ·210015 BOLD LINE |RF
Pag. 460

BOLD						
.01 800 mm | 45º	**.02** 800 mm | 90º	**.03** 1520 mm | 45º	**.04** 1520 mm | 90º	**.05** 2950 mm | 45º	**.06** 2950 mm | 90º	**.07** 5100 mm | 45º

REF.	DIMENSION ⬟	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *1 | LUMEN .27	.30	.40	WATT	DIMM ▼
210001	.01	●	.OP	.ST	.9	765	795	825	6	.DA .PU .D1
	.02					1530	1590	1650	12	
	.03					1530	1590	1650	12	
	.04					3060	3180	3300	24	
	.05					3060	3180	3300	24	
	.06					6120	6360	6600	47	
	0.7					5355	5565	5775	41	

REF.	DIMENSION ⬟	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *1 | LUMEN .27	.30	.40	WATT	DIMM ▼
210001	.01	●	.OP	.HI	.9	1530	1589	1652	12	.DA .PU .D1
	.02					3060	3178	3304	24	
	.03					3060	3178	3304	24	
	.04					6120	6356	6608	47	
	.05					6120	6356	6608	47	
	.06					12240	12712	13216	94	
	0.7					10710	11123	11564	83	

Reference order | 210001.XX.RF.XX.XX.XX.9.XX.XX

BOLD LINE	REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *1 | LUMEN .27	.30	.40	WATT K	DIMM ▼
	210015	.03	863	●	.OP .MP	.ST	.9	2295	2385	2475	18	.DA .PU .D1
		.04	1144					3060	3180	3300	24	
		.05	1425					3825	3975	4125	30	
		.06	1706					4590	4770	4950	35	

BOLD LINE	REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *1 | LUMEN .27	.30	.40	WATT K	DIMM ▼
	210015	.03	863	●	.OP .MP	.ST	.9	4590	4767	4956	35	.DA .PU .D1
		.04	1144					6120	6356	6608	47	
		.05	1425					7650	7945	8260	59	
		.06	1706					9180	9534	9912	71	

Reference order | 210015.XX.SR.XX.XX.XX.9.XX.XX

COMPONENTS

COVERT KIT	REF.
	TF17

Reference order | TF17.RF.XX

● Select finish

BOLD | BOLD LINE

REF 210001.RF | 210015.RF

PHOTOMETRY

OPAL

INCLUDED



RF INSTALATION KIT

PROFILE



FINISHES

● EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit

ON DEMAND

Emergency Lighting *
Motion Detection
Well-Certified LED Boards
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

.RF

RECESSED FRAME

INSTALLATIONS

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06 | IP20 IP43 | LIFE 50000H | DIM OPTIONAL | INTEGRATED | INDOOR | 220-240 V 50-60 Hz | CE

WING

REF 10200.RF

.PN
PENDANT

·10200 WING | PN
Pag. 262

.SR
SURFACE

·10200 WING | SR
Pag. 262

.RF
RECESSED FRAME

·10200 WING | RF
Pag. 464

.TR
TRIMLESS

·10200 WING | TR
Pag. 660



REF.	PROFILE LENGTH ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
10200	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	
	.05	1405					3825	3975	4125	9500-9850	30	64	
	.06	1686					4590	4770	4950	11400-11820	35	76	
	.07	1967					5355	5565	5775	13300-13790	41	89	
	.08	2248					6120	6360	6600	15200-15760	47	102	

REF.	PROFILE LENGTH ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
10200	.03	843	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1124					6120	6356	6608	47	
	.05	1405					7650	7945	8260	59	
	.06	1686					9180	9534	9912	71	
	.07	1967					10710	11123	11564	83	
	.08	2248					12240	12712	13216	94	

Reference order | 10200.XX.RF.XX.XX.XX.X.XX.XX

Total length = Profile length + 10mm + 2x8mm (Cover kit)
(Total length - 8mm) x 61mm
120mm

COMPONENTS

COVERT KIT	REF.	FINISH
	TF13 2x8mm.	●

Reference order | TF13.RF.XX ●

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

JOINTS

LINEAR JOINT
UR13

● Select finish

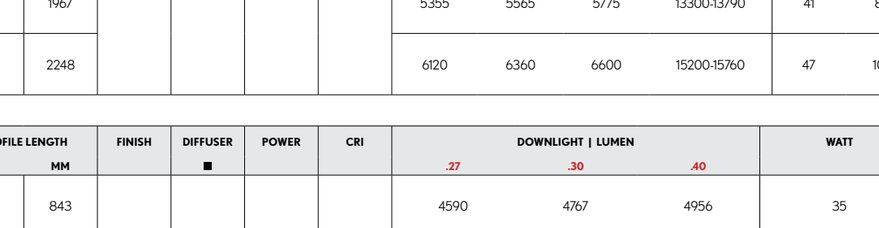

WING

REF 10200.RF

PHOTOMETRY

OPAL MICROPRISMATIC

INCLUDED



RF INSTALATION KIT

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700mA.*
*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

OKKO MODULAR	REF.	DIMEN-SIONS	FINISHES	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	410012	**.01**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	111	2	100	**.DA .PU .D1**	
								.30	125				
								.40	132				
	410012	**.02**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	222	3	200	**.DA .PU .D1**	
								.30	250				
								.40	264				
	410012	**.03**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	333	5	300	**.DA .PU .D1**	
								.30	375				
								.40	396				
	410012	**.05**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	555	7	500	**.DA .PU .D1**	
								.30	625				
								.40	660				
	410012	**.10**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	1114	12	500	**.DA .PU .D1**	
								.30	1245				
								.40	1320				

Reference order | 410012.XX.RF.XX.XX.ST.9.XX.XX

● Select finishes

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .03 | .05 | .10

LIGHTING OPTIONS

■ BEAM ANGLE

20º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

.RF

RECESSED FRAME

INSTALLATIONS

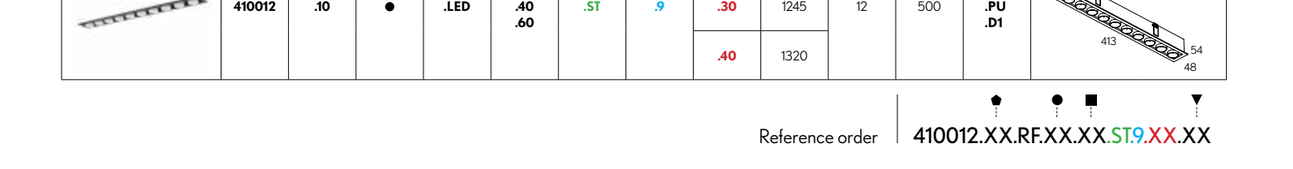

.PN
PENDANT

·210012 OKKO MODULAR LINE | PN - Pag. 150

.SR
SURFACE

·210012 OKKO MODULAR LINE | SR - Pag. 150

.RF
RECESSED FRAME

·410012 OKKO MODULAR | RF-Pag. 468

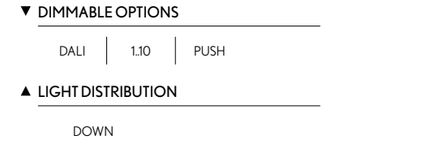

OKKO MODULAR

REF 410012.RF

PHOTOMETRY

OKKO PLUS MODULAR	REF.	DIMEN-SIONS	FINISHES	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	410013	**.01**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	111	2	100	**.DA .PU .D1**	
								.30	125				
								.40	132				
	410013	**.02**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	222	3	200	**.DA .PU .D1**	
								.30	250				
								.40	264				
	410013	**.03**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	333	5	300	**.DA .PU .D1**	
								.30	375				
								.40	396				
	410013	**.05**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	555	7	500	**.DA .PU .D1**	
								.30	625				
								.40	660				
	**410013**	**.10**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	1114	12	500	**.DA .PU .D1**	
								.30	1245				
								.40	1320				

Reference order | 410013.XX.RF.XX.XX.ST.9.XX.XX

● Select finishes

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .03 | .05 | .10

LIGHTING OPTIONS

■ BEAM ANGLE

20º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

.RF

RECESSED FRAME

INSTALLATIONS

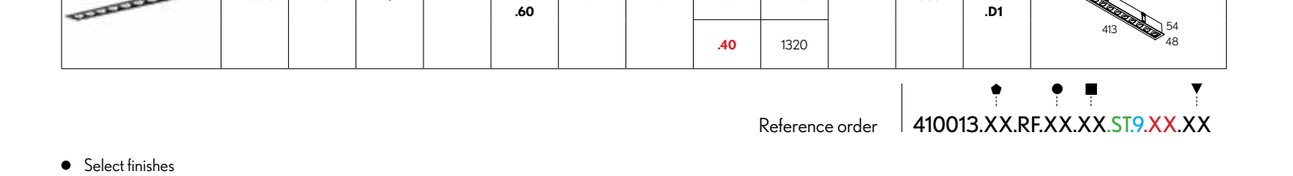

.PN
PENDANT

·210013 OKKO PLUS MODULAR LINE | PN - Pag. 154

.SR
SURFACE

·210013 OKKO PLUS MODULAR LINE | SR - Pag. 154

.RF
RECESSED FRAME

·410013 OKKO PLUS MODULAR | RF-Pag. 470

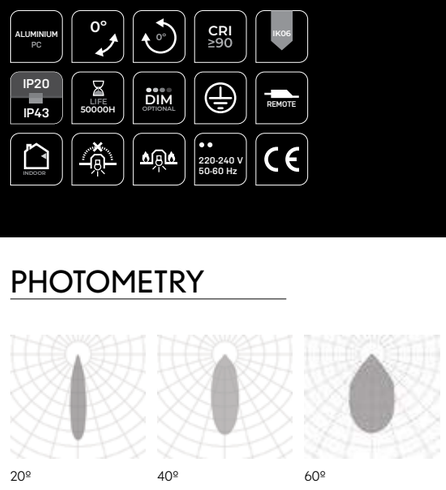

OKKO PLUS MODULAR

REF 410013.RF

PHOTOMETRY

LENT MODULAR	REF.	DIMEN-SIONS	SHAPE ◗	FINISHES	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	10216	**.01**	**.RO .SQ**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	152	6	580	**.DA .PU .D1**	
									.30	181				
									.40	185				
	10216	**.03**	**.RO .SQ**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	448	8	700	**.DA .PU .D1**	
									.30	458				
									.40	500				
	10216	**.05**	**.RO .SQ**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	774	14	700	**.DA .PU .D1**	
									.30	892				
									.40	929				
	10216	**.10**	**.RO .SQ**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	1519	24	700	**.DA .PU .D1**	
									.30	1814				
									.40	1871				

Reference order | 10216.XX.RF.XX.XX.XX.ST.9.XX.XX

● Select finishes

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .03 | .05 | .10

LIGHTING OPTIONS

■ BEAM ANGLE

20º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

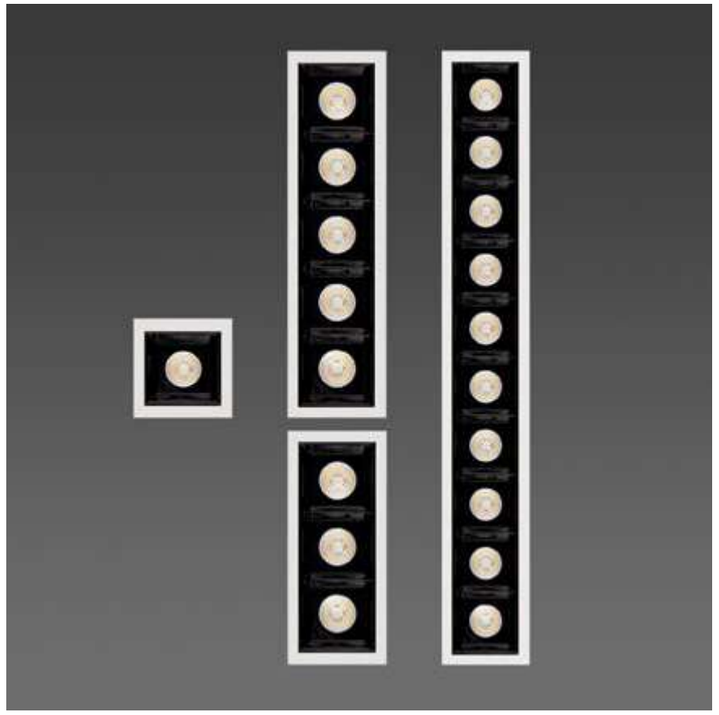

.RF

RECESSED FRAME

INSTALLATIONS

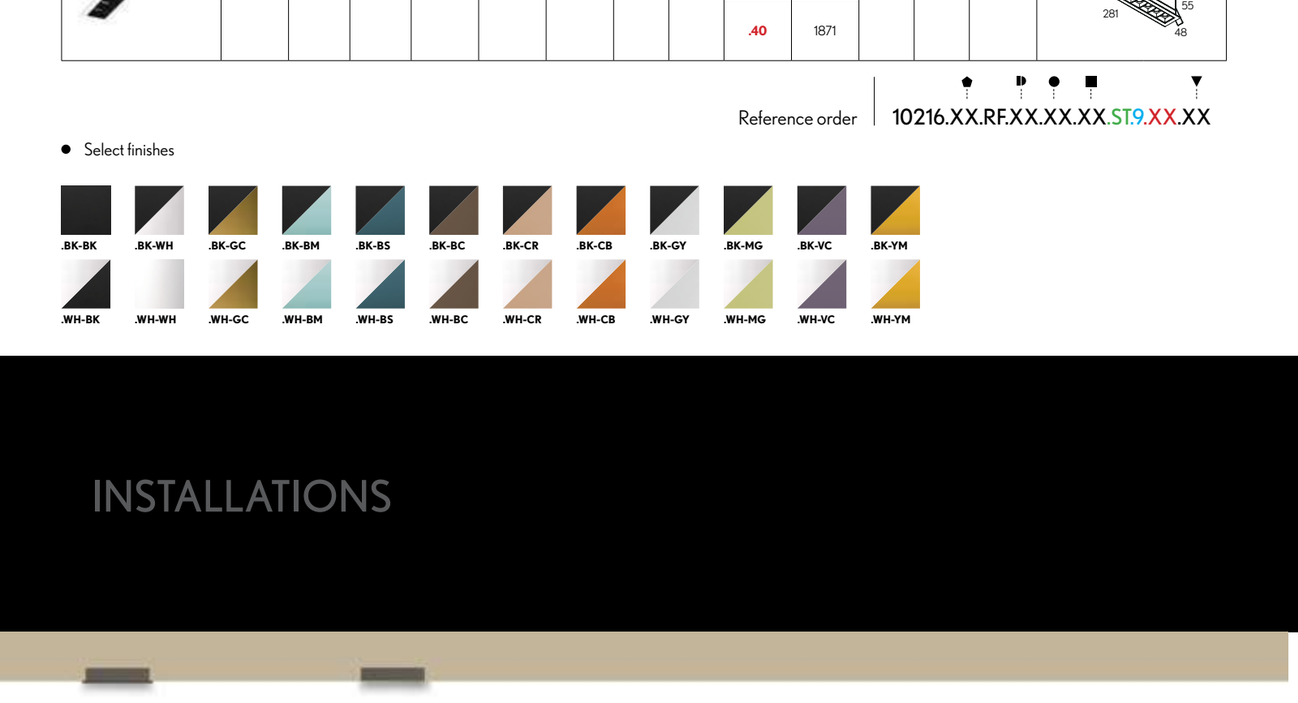

.RF
RECESSED FRAME

·10216 LENT MODULAR | RF
Pag. 472

.TR
TRIMLESS

·10216 LENT MODULAR | TR
Pag. 666

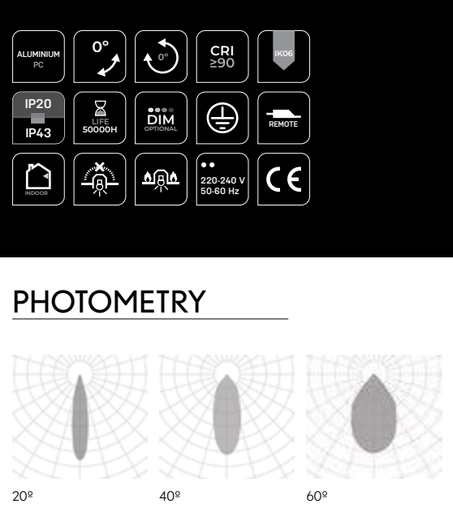

LENT
MODULAR

REF 10216.RF

PHOTOMETRY

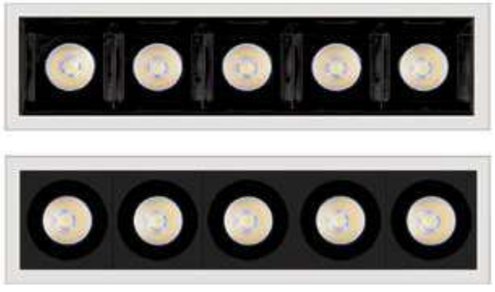

SQUARE | SQ

ROUND | RD

LENT MOTION	REF.	DIMEN-SIONS ⬟	SHAPE ◗	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	10212	**.03**	**.RO .SQ**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	448	8	700	**.DA .PU .D1**	
									.30	458				
									.40	500				
	10212	**.05**	**.RO .SQ**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	774	14	700	**.DA .PU .D1**	
									.30	892				
									.40	929				
	10212	**.10**	**.RO .SQ**	●	**.LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	1519	24	700	**.DA .PU .D1**	
									.30	1814				
									.40	1871				

Reference order | 10212.XX.RF.XX.XX.XX.ST.9.XX.XX

● Select finishes

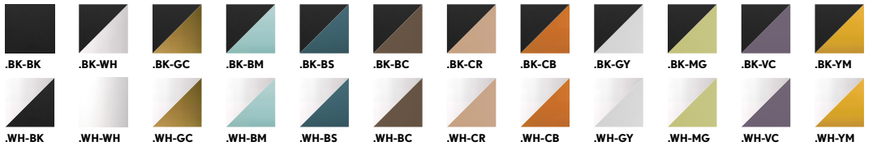

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.03 | .05 | .10

LIGHTING OPTIONS

■ BEAM ANGLE

20º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

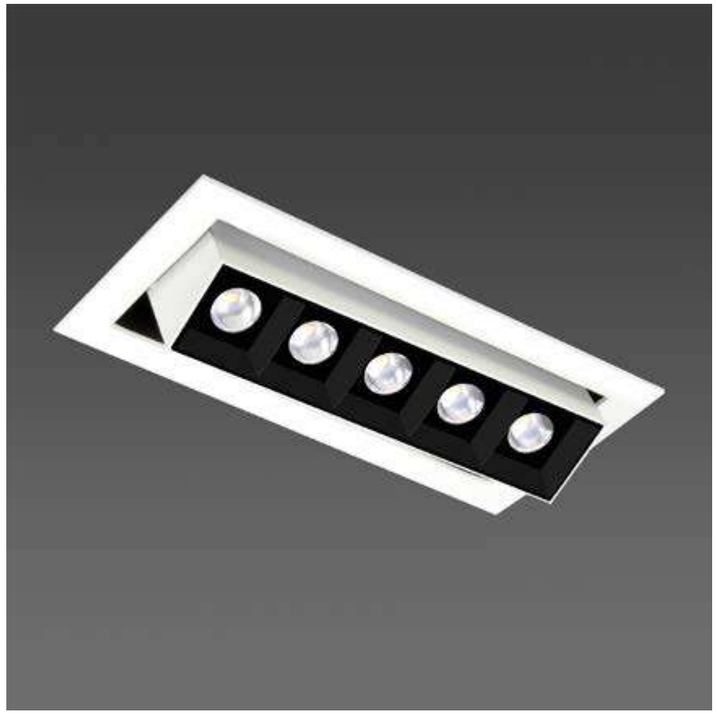

.RF
RECESSED FRAME

RECESSED FRAME

INSTALLATIONS

LENT MOTION

REF 10212.RF

.RF
RECESSED FRAME

·10212 LENT MOTION | RF
Pag. 474

PHOTOMETRY

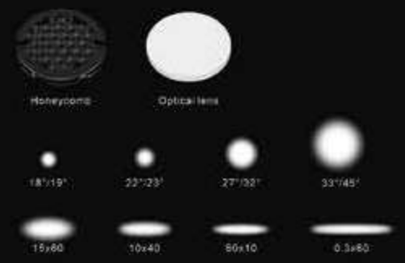

OPTICAL ACCESORIES



HEAT DISSIPATION THEORY

TILTING 30º

SASSY

new

A new era in LED lighting

Specific and efficient. This is your new go-to LED lighting solution. It gets five stars for its lighting capacity and has brilliant accessories that give you the highest possible performance.

Una nueva era en la iluminación LED

Especialización y eficacia. Así es el nuevo modelo de referencia en iluminación LED. Un 5 estrellas por su capacidad lumínica pero especialmente por los accesorios que aporta y acopla para conseguir el mayor rendimiento posible.

SASSY	REF.	DIMENSIONS ⬟	FINISHES ●	SKETCH
	410002	**.01**	**.WH.WH** **.BK-BK**	

Reference order | 410002.01.RF.XX

SASSY LED	REF.	DIMEN-SIONS ⬟	FINISHES ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	120001	**.01**	**.BK-BK**	**.15** **.26** **.38** **.50**	**.ST**	**.9**	**.27**	599	10	250	**.DA** **.PU** **.D1**	
							.30	732				
							.40	775				
							.DW	627 to 14	6	350 to 14	**.DA**	
					.MD	**.9**	**.27**	696	12	300	**.DA** **.PU** **.D1**	
							.30	872				
							.40	893				
							.DW	713 to 14	7	420 to 14	**.DA**	
					.HI	**.9**	**.27**	778	15	350	**.DA** **.PU** **.D1**	
							.30	947				
							.40	1033				
							.DW	880 to 30	10	280 to 14	**.DA**	

Reference order | 120001.01.BK-BK.XX.XX.X.XX.XX

• FINISHES

EXTERNAL COLORS

INTERNAL COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

15º | 26º | 38º | 50º

POWER

STANDARD | MIDDLE | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | DW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Tunable White
Wireless Control Options

new

IP 65

RECESSED FRAME

.RF

SASSY

REF 410002.RF

INSTALLATIONS

PHOTOMETRY

15º 26º 38º 50º

.RF
RECESSED FRAME

·410002 SASSY | RF
Pag. 476

.TR
TRIMLESS

·410002 SASSY | TR
Pag. 668

COMPONENTS

RING PART	FINISH ●
	.BK-BK .CH-CH .WH-WH .MS-MS .GF-GF
ACC410002.RR	

Reference order | ACC410002.RR.XX ●

RING PART			FINISH ●
			.BK-BK .WH-WH .BK-WH
ACC410002.TBR	ACC410002.OVR	ACC410002.CFR	

Reference order | ACC410002.XX.XX ●

ACCESORIES

OVAL FLOOD LENS	REF.	LENSE EFFECT ■	SKETCH
	ACC410002.OV	.03X60	 6,4 Ø37,5
		.10X60	
		.10X40	
		.15X60	

Reference order | ACC410002.OV.XX ■

FLOOD LENS	REF.	LENSE EFFECT ■	SKETCH
	ACC410002	.ZSX1.3	6,4 Ø37,5
		.ZSX1.5	
		.ZSX2	
		.ZSX3	

Reference order | ACC410002.XX ■

HONEYCOMB
ACC410002.HC

● Select finish

SASSY

REF 410002.RF

SASSY SQ	REF.	DIMENSIONS ⬟	FINISHES ●	SKETCH
	410003	**.01**	**.WH.WH** **.BK-BK**	

Reference order | 410003.01.RF.XX

SASSY LED	REF.	DIMEN-SIONS ⬟	FINISHES ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	120001	**.01**	**.BK-BK**	**.15** **.26** **.38** **.50**	**.ST**	**.9**	**.27**	599	10	250	**.DA** **.PU** **.D1**	
							.30	732				
							.40	775				
							.DW	627 to 14	6	350 to 14	**.DA**	
					.MD	**.9**	**.27**	696	12	300	**.DA** **.PU** **.D1**	
							.30	872				
							.40	893				
							.DW	713 to 14	7	420 to 14	**.DA**	
					.HI	**.9**	**.27**	778	15	350	**.DA** **.PU** **.D1**	
							.30	947				
							.40	1033				
							.DW	880 to 30	10	280 to 14	**.DA**	

Reference order | 120001.01.BK-BK.XX.XX.X.XX.XX

• FINISHES

EXTERNAL COLORS

INTERNAL COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

15º | 26º | 38º | 50º

POWER

STANDARD | MIDDLE | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | DW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Tunable White
Wireless Control Options

new

IP 65

RECESSED FRAME

.RF

.ME

INSTALLATIONS

SASSY
SQ

REF 410003.RF

.RF
RECESSED FRAME

·410003 SASSY SQ | RF
Pag. 482

.TR
TRIMLESS

·410003 SASSY SQ | TR
Pag. 672

PHOTOMETRY

15º 26º 38º 50º

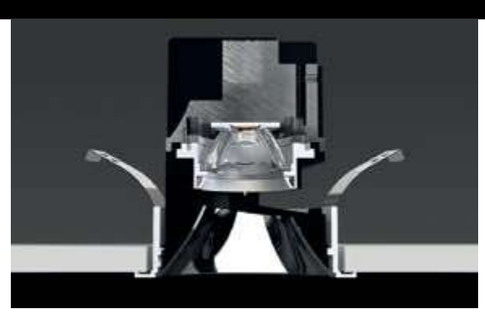

COMPONENTS

RING PART	FINISH ●
	.BK-BK .CH-CH .WH-WH .MS-MS .GF-GF
ACC410003.SQR	

Reference order | ACC410003.SQR.XX

ACCESORIES

OVAL FLOOD LENS	REF.	LENSE EFFECT ■	SKETCH
	ACC410002.OV	.03X60	6.4 Ø37,5
		.10X60	
		.10X40	
		.15X60	

FLOOD LENS	REF.	LENSE EFFECT ■	SKETCH
	ACC410002	.ZSX1.3	6.4 Ø37,5
		.ZSX1.5	
		.ZSX2	
		.ZSX3	

HONEYCOMB
ACC410002.HC

Reference order | ACC410003.OV.XX

Reference order | ACC410003.XX

.RF

RECESSED FRAME

● Select finish

SASSY
SQ

REF 410003.RF

VIO

Re -framing spaces

Focus on something specific or set the mood for the entire room.

Removable LED modules, a choice of fixed and adjustable assembly modes (4+4) and textured black and white finishes make them your best ally for achieving the pleasing effect you need. Welcome to your blank page.

Let your imagination fly, then watch as the VIO product family sets the stage. And when you have finished lighting, if you like, hit the Re-frame button.

Re-encuadre de espacios

Poner el foco en un elemento concreto o tamizar una estancia completa.

Gracias a sus módulos LED extraíbles, su capacidad de montaje en modo orientado o fijo (4+4) y sus acabados en negro texturizado o blanco, VIO se convierte en el mejor aliado para dibujar el escenario que necesitas.

Bienvenido a un espacio aún por definir. Imagínalo y deja que la familia de productos VIO defina el encuadre. ¡Y una vez iluminado, reencuádralo!

• FINISHES

COLORS

□ ■

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

9º | 12º | 30º | 16º | 24º | 38º

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Wireless Control Options

new

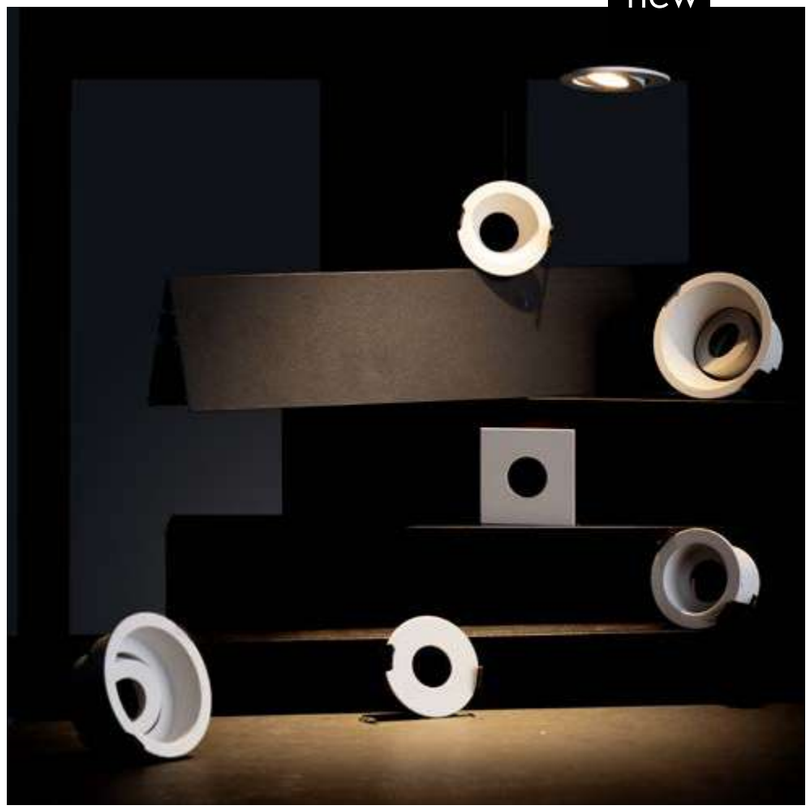

.RF

RECESSED FRAME

INSTALLATIONS

VIO

VIO | SQ | DEEP | DOME
VIO MOVE | SQ MOVE | DEEP MOVE | DOME MOVE

REF 2018X.RF

.RF
RECESSED FRAME

·2018X VIO | RF
Pag. 488

VIO MOVE	REF.	DIMENSIONS ⬟	FINISHES ●	SKETCH
	20184	**.01**	●	

VIO	REF.	DIMENSIONS ⬟	FINISHES ●	SKETCH
	20185	**.01**	●	

VIO SQ MOVE	REF.	DIMENSIONS ⬟	FINISHES ●	SKETCH
	20180	**.01**	●	

VIO SQ	REF.	DIMENSIONS ⬟	FINISHES ●	SKETCH
	20181	**.01**	●	

VIO DEEP MOVE	REF.	DIMENSIONS ⬟	FINISHES ●	SKETCH
	20187	**.01**	●	

VIO DEEP	REF.	DIMENSIONS ⬟	FINISHES ●	SKETCH
	20186	**.01**	●	

VIO DOME MOVE	REF.	DIMENSIONS ⬟	FINISHES ●	SKETCH
	20182	**.01**	●	

VIO DOME	REF.	DIMENSIONS ⬟	FINISHES ●	SKETCH
	20183	**.01**	●	

*⊥ .ST = H + 51 | .HI = H + 76

VIOLED	REF.	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	VL	●	**LED**	**.9 .12 .30**	**.ST**	**.9**	**.27**	156	3	700	**.DA .PU .D1**	
							.30	165				
							.40	172				
	VL	●	**LED**	**.16 .24 .38**	**.HI**	**.9**	**.27**	391	7	500	**.DA .PU .D1**	
							.30	402				
							.40	458				

Reference order | ● ■ ▼ | VL.XX.XX.XX.9.XX.XX

VIO DRIVERS	DIMENSION ⬟		DIMM ▼	POWER
DRVL	**.01**	2 - 3 vio	**.DA .PU .D1**	**.ST**
	.02	4 - 9 vio		
	.03	10 - 15 vio		
	.01	1 - 3 vio	**.DA .PU .D1**	**.HI**
	.02	4 - 8 vio		

Reference order | ⬟ ▼ | DRVL.XX.XX.XX

*1 Diable driver dimensions are greater than those of the cut-out-hole. Diing options require the combination of a minimum of 2 luminaires.
Las dimensiones del driver dimable son superiores a las del agujero de corte. Las opciones de regulación necesitan la combinación de un mínimo de 2 luminarias.

● Select finishes

.WH-WH .BK-BK

VIO

VIO | SQ | DEEP | DOME
VIO MOVE | SQ MOVE | DEEP MOVE | DOME MOVE

REF 2018X.RF

PHOTOMETRY

GALANTA DEEP	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	410001	**.01**	●	**LED**	**.OP**	**.ST**	**.9**	**.27**	324	5	500	**.DA .PU .D1**	
								.30	345				
								.40	417				
	410001	**.02**	●	**LED**	**.OP**	**.ST**	**.9**	**.27**	527	8	500	**.DA .PU .D1**	
								.30	465				
								.40	430				
	410001	**.03**	●	**LED**	**.OP**	**.ST**	**.9**	**.27**	768	12	500	**.DA .PU .D1**	
								.30	694				
								.40	641				

Reference order | ⬟ ● ■ ▼ 410001.XX.RF.XX.XX.ST.9.XX.XX

● Select finishes

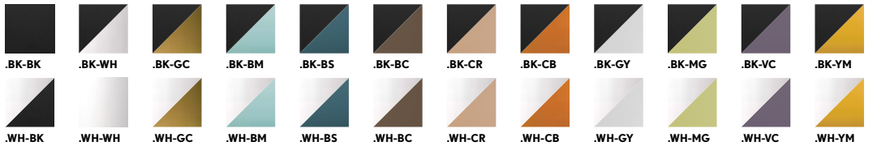

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

new

.RF

RECESSED FRAME

INSTALLATIONS

GALANTA DEEP

REF 410001.RF

PHOTOMETRY

OPAL

.RF
RECESSED FRAME

·410001 GALANTA DEEP | RF
Pag. 492

MARTORELL	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20115	**.01**	**.WH-WH** **.BK-BK**	**LED**	**.15** **.24** **.32**	**.ST**	**.9**	**.27**	175	3	700	**.DA**[*1] **.PU**[*1] **.D1**[*1]	
								.30	188				
								.40	199				
	20115	**.02**	●	**LED**	**.15** **.24** **.32**	**.ST**	**.9**	**.27**	470	8	700	**.DA** **.PU** **.D1**	
								.30	498				
								.40	515				
	20115	**.03**	●	**LED**	**.24** **.32** **.43**	**.ST**	**.9**	**.27**	1071	12	350	**.DA** **.PU** **.D1**	
								.30	1156				
								.40	1198				

Reference order | ⬟ ● ■ ▼ 20115.XX.RF.XX.XX.ST.9.XX.XX

● Select finishes

*[1] Dimm options require the combination of a minimum of 2 luminaires. *Las opciones de regulación necesitan la combinación de un mínimo de 2 luminarias.*

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

15º | 24º | 32º | 43º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm (.02, .03)
Tunable White (.02, .03)
Honey Comb (.03)
Wireless Control Options
Special RAL Color

.RF

RECESSED FRAME

INSTALLATIONS

.PN
PENDANT
·20115 MARTORELL | PN
Pag. 322

.TK
TRACKLIGHT
·20115 MARTORELL | TK
Pag. 744

.SR
SURFACE
·20115 MARTORELL | SR
Pag. 322

.RF
RECESSED FRAME
·20115 MARTORELL | RF
Pag. 494

.TR
TRIMLESS
·20115 MARTORELL | TR
Pag. 676

MARTORELL

REF 20115.RF

PHOTOMETRY

MARTORELL MOVE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20110	**.01**	●	**LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	167	3	700	**.DA .PU .D1**	
								.30	184				
								.40	206				
	20110	**.02**	●	**LED**	**.18 .25 .35**	**.ST**	**.9**	**.27**	465	9	700	**.DA .PU .D1**	
								.30	507				
								.40	548				
	20110	**.03**	●	**LED**	**.18 .25 .35**	**.ST**	**.9**	**.27**	1058	15	350	**.DA .PU .D1**	
								.30	1096				
								.40	1231				

Reference order | ⬟ ● ■ ▼

20110.XX.RF.XX.XX.ST.9.XX.XX

● Select finishes

.BK-BK	.BK-WH	.BK-GC	.BK-BM	.BK-BS	.BK-BC	.BK-CR	.BK-CB	.BK-GY	.BK-MG	.BK-VC	.BK-YM
.WH-BK	.WH-WH	.WH-GC	.WH-BM	.WH-BS	.WH-BC	.WH-CR	.WH-CB	.WH-GY	.WH-MG	.WH-VC	.WH-YM

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

20º 40º 60º | 18º 25º 35º | 18º 25º 35º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm (.02, .03)
Tunable White (.02, .03)
Honey Comb (.03)
Wireless Control Options

.RF

RECESSED FRAME

INSTALLATIONS

.SR
SURFACE

·20110 MARTORELL MOVE | SR
Pag. 324

.RF
RECESSED FRAME

·20110 MARTORELL MOVE | RF
Pag. 496

MARTORELL MOVE

REF 20110.RF

PHOTOMETRY

MARTORELL TÁRREGA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20117	**.01**	●	**LED**	**.25** **.30**	**.ST**	**.9**	**.27**	563	10	500	**.DA** **.PU** **.D1**	
								.30	647				
								.40	719				

Reference order | ⬟ ● ■ ▼ 20117.01.RF.XX.XX.ST.9.XX.XX

- Select finishes

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

25º | 30º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

.RF

RECESSED FRAME

INSTALLATIONS

MARTORELL TARREGA

REF 20117.RF

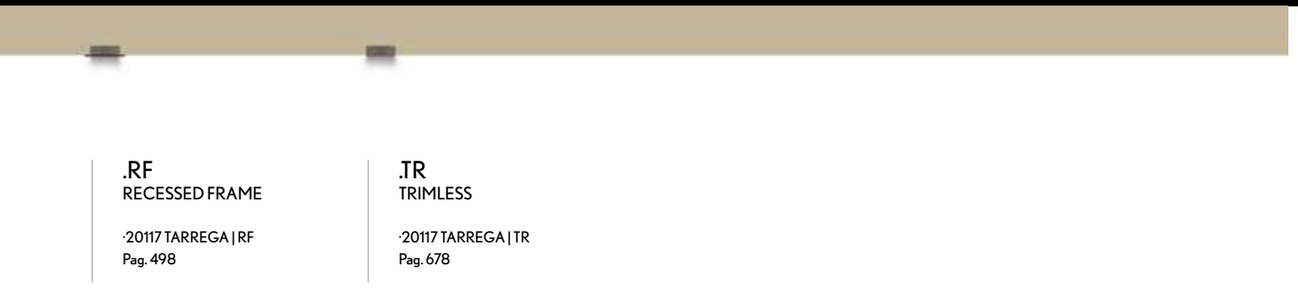

.RF
RECESSED FRAME

·20117 TARREGA | RF
Pag. 498

.TR
TRIMLESS

·20117 TARREGA | TR
Pag. 678

PHOTOMETRY

25º 38º

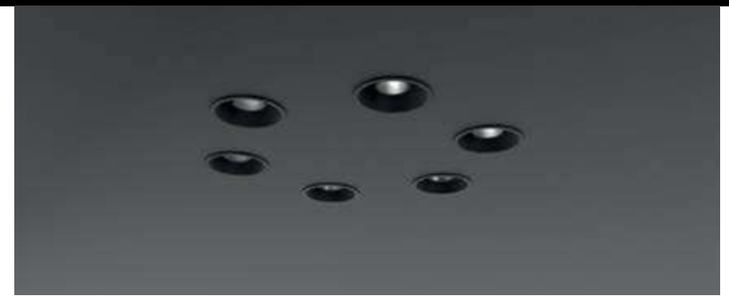

MARTORELL TÁRREGA SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20116	**.01**	●	**LED**	**.25** **.30**	**.ST**	**.9**	**.27**	563	10	500	**.DA** **.PU** **.D1**	
								.30	647				
								.40	719				

Reference order | 20116.01.RF.XX.XX.ST.9.XX.XX

MARTORELL TÁRREGA SQ2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20119	**.01**	●	**LED**	**.25** **.30**	**.ST**	**.9**	**.27**	1126	20	500	**.DA** **.PU** **.D1**	
								.30	1294				
								.40	1438				

Reference order | 20119.01.RF.XX.XX.ST.9.XX.XX

● Select finishes

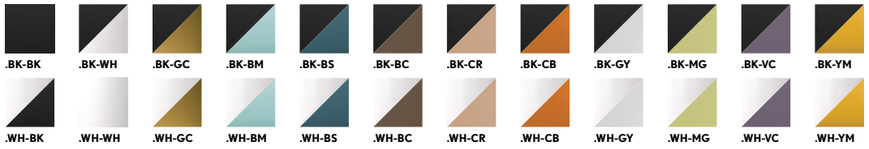

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

25º | 30º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

.RF

RECESSED FRAME

INSTALLATIONS

MARTORELL
TARREGA SQ | TARREGA SQ2

20116.RF | 20119.RF

.RF
RECESSED FRAME

·20116 TARREGA SQ | RF ·20119 TARREGA SQ2 | RF
Pag. 500

.TR
TRIMLESS

·20116 TARREGA SQ | TR
Pag. 678

PHOTOMETRY

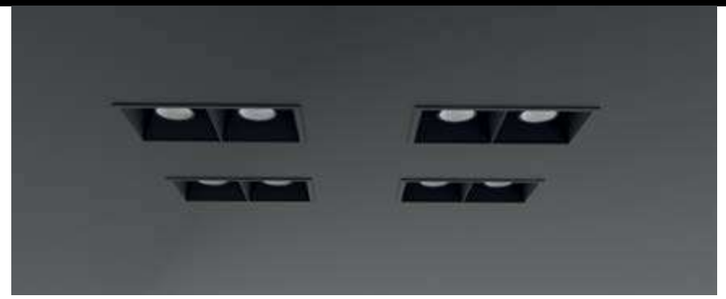

MARTORELL MINI CRATE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20175	**.01**	●	**LED**	**.9** **.16** **.30**	**.ST**	**.9**	**.27**	175	3	700	**.DA**[*1] **.PU**[*1] **.D1**[*1]	
								.30	188				
								.40	199				
	20175	**.02**	●	**LED**	**.20** **.40** **.60**	**.ST**	**.9**	**.27**	350	6	700	**.DA** **.PU** **.D1**	
								.30	276				
								.40	398				
	20175	**.03**	●	**LED**	**.20** **.40** **.60**	**.ST**	**.9**	**.27**	525	9	700	**.DA** **.PU** **.D1**	
								.30	564				
								.40	597				

Reference order | ⬟ ● ■ ▼ 20175.XX.RF.XX.XX.ST.9.XX.XX

● Select external - internal finishes

BK-BK WH-WH

*1 Diing options require the combination of a minimum of 2 luminaires. *Las opciones de regulación necesitan la combinación de un mínimo de 2 luminarias.*

● FINISHES

COLOR

□ ■

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

9º | 16º | 20º | 30º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Wireless Control Options

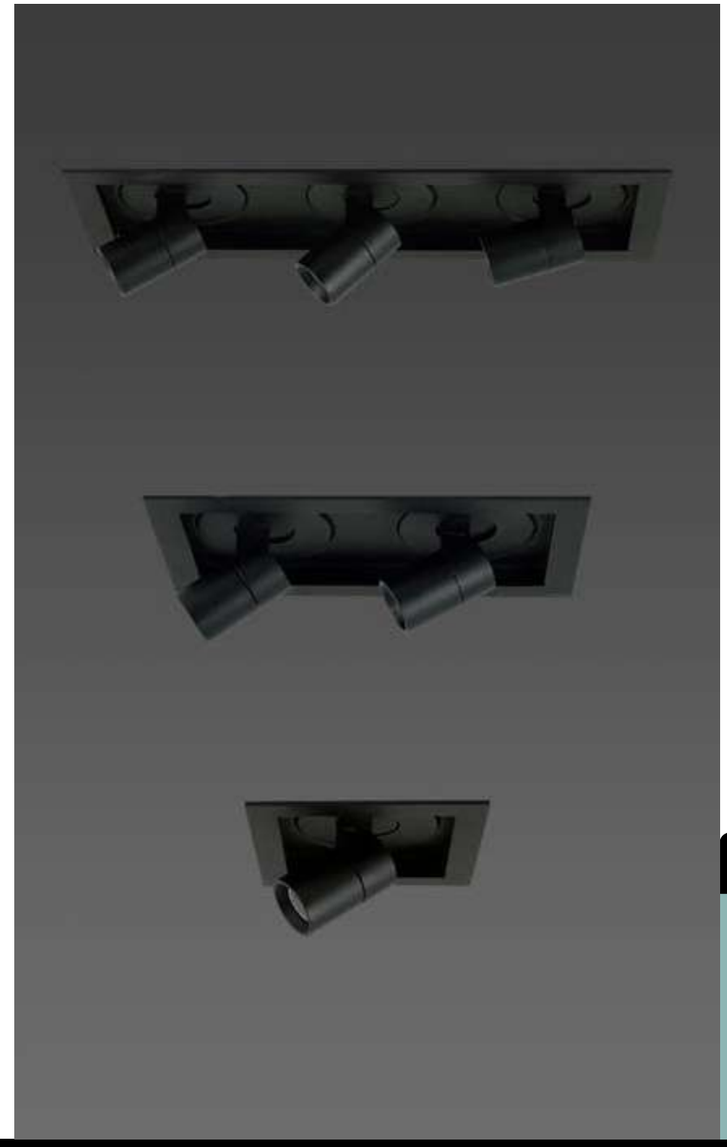

.RF

RECESSED FRAME

INSTALLATIONS

.SR
SURFACE

·20175 MARTORELL MINI CRATE | SR
Pag. 328

.RF
RECESSED FRAME

·20175 MARTORELL MINI CRATE | RF
Pag. 502

MARTORELL
MINI CRATE

REF 20175.RF

PHOTOMETRY

MARTORELL CRATE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20176	**.01**	●	**LED**	**.15 .24 .32**	**.ST**	**.9**	**.27**	470	8	700	**.DA .PU .D1**	
								.30	498				
								.40	515				
	20176	**.02**	●	**LED**	**.15 .24 .32**	**.ST**	**.9**	**.27**	940	16	700	**.DA .PU .D1**	
								.30	996				
								.40	1030				
	20176	**.03**	●	**LED**	**.15 .24 .32**	**.ST**	**.9**	**.27**	1410	24	700	**.DA .PU .D1**	
								.30	1494				
								.40	1545				

Reference order | 20176.XX.RF.XX.XX.ST.9.XX.XX

● Select finishes

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

15º | 24º | 32º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

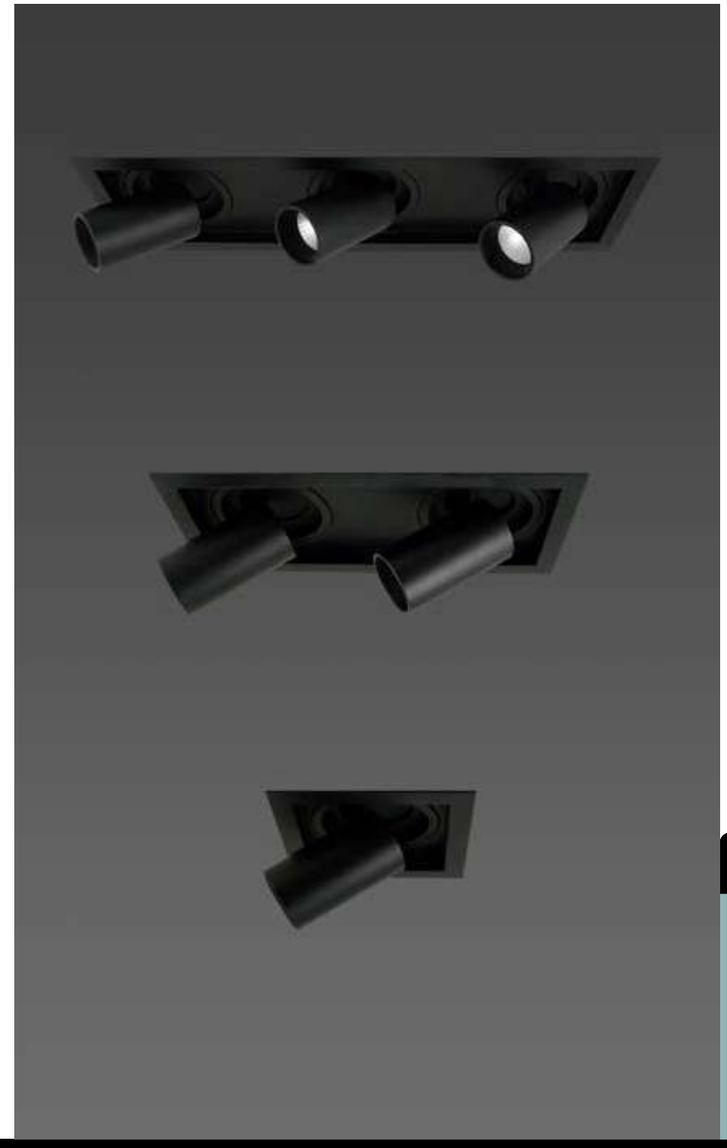

.RF

RECESSED FRAME

INSTALLATIONS

MARTORELL CRATE

REF 20176.RF

.SR
SURFACE

·20176 MARTORELL CRATE | SR
Pag. 330

.RF
RECESSED FRAME

·20176 MARTORELL CRATE | RF
Pag. 504

PHOTOMETRY

FACE TUBULAR	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20205	**.01**	●	**.LED**	**.40**	**.ST**	**.9**	**.27**	480	8	350	**.DA .PU .D1**	
								.30	493				
								.40	496				

Reference order | 20205.01.RF.XX.XX.ST.9.XX.XX

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

new

.RF

RECESSED FRAME

- Select external-internal finishes

.WH-WH .BK-BK .GC-GC .CB-CB

ON DEMAND

Wireless Control Options
Special RAL Color

INSTALLATIONS

FACE TUBULAR

REF 20205.RF

.SR
SURFACE

·20205 FACE TUBULAR | SR
Pag. 360

.RF
RECESSED FRAME

·20205 FACE TUBULAR | RF
Pag. 506

PHOTOMETRY

38º

KLIMT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	20134	**.01**	●	**LED**	**.15 .24 .38**	**.ST**	**.9**	**.27**	395	7	700	**.DA .PU .D1**	
								.30	497				
								.40	550				
	20134	**.02**	●	**LED**	**.15 .25 .38 .60**	**.ST**	**.9**	**.27**	803	11	500	**.DA .PU .D1**	
								.30	983				
								.40	991				
	20134	**.03**	●	**LED**	**.15 .28 .40 .60**	**.ST**	**.9**	**.27**	1945	30	700	**.DA .PU .D1**	
								.30	2073				
								.40	2311				

Reference order | ⬟ ● ■ ▼ 20134.XX.RF.XX.XX.ST.9.XX.XX

● Select external - internal finishes

*1 Remote driver when diable. *Driver remoto cuando es dimable.*



• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

15º | 24º | 25º | 28º | 38º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options
Special RAL Color

RECESSED FRAME

.RF

INSTALLATIONS

.SR
SURFACE

·20134 KLIMT | SR
Pag. 338

.TK
TRACKLIGHT

·20134 KLIMT | TK
Pag. 748

.RF
RECESSED FRAME

·20134 KLIMT | RF
Pag. 508

KLIMT

REF 20134.RF

PHOTOMETRY

KLIMT FIX	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20135	**.01**	●	**LED**	**.15** **.24** **.38**	**.ST**	**.9**	**.27**	395	8	700	**.DA** **.PU** **.D1**	
								.30	497				
								.40	659				
	20135	**.02**	●	**LED**	**.15** **.25** **.38** **.60**	**.ST**	**.9**	**.27**	803	11	500	**.DA** **.PU** **.D1**	
								.30	983				
								.40	991				
	20135	**.03**	●	**LED**	**.15** **.28** **.40** **.60**	**.ST**	**.9**	**.27**	1945	30	700	**.DA** **.PU** **.D1**	
								.30	2073				
								.40	2311				

Reference order | ⬟ ● ■ ▼ 20135.XX.RF.XX.XX.ST.9.XX.XX

● Select external - internal finishes

BK-BK BK-GC WH-WH WH-GC

• FINISHES

EXTERNAL | INTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

15º | 24º | 25º | 28º | 38º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options
Special RAL Color

new

.RF

RECESSED FRAME

INSTALLATIONS

KLIMT FIX

REF 20135.RF

.SR
SURFACE

·20135 KLIMT FIX | SR
Pag. 340

.RF
RECESSED FRAME

·20135 KLIMT FIX | RF
Pag. 510

PHOTOMETRY

15º 24º 25º 28º 38º 40º 60º

GEO	REF.	DIMEN-SIONS	FINISHES	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	30511	**.01**	●	**.15** **.24** **.38**	**.ST**	**.9**	**.27**	498	8	700	**.DA** **.PU** **.D1**	
							.30	513				
							.40	622				
	30511	**.02**	●	**.15** **.25** **.38** **.60**	**.ST**	**.9**	**.27**	1075	14	350	**.DA** **.PU** **.D1**	
							.30	1114				
							.40	1319				
	30511	**.03**	●	**.15** **.28** **.40**	**.ST**	**.9**	**.27**	1856	30	700	**.DA** **.PU** **.D1**	
							.30	2031				
							.40	2529				

Reference order | 30511.XX.RF.XX.XX.ST.9.XX.XX



● Select external - internal finishes

BK-BK WH-WH

*1 Remote driver when diable. *Driver remoto cuando es dimable.*

• FINISHES

COLORS

DIMENSIONS

● View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

15º | 24º | 25º | 28º | 38º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options
Special RAL Color

new

.RF

RECESSED FRAME

INSTALLATIONS

.SR
SURFACE

·30511 GEO | SR
Pag. 342

.TK
TRACKLIGHT

·30511 GEO | TK
Pag. 750

.RF
RECESSED FRAME

·30511 GEO | RF
Pag. 512

GEO

REF 30511.RF

PHOTOMETRY

15º 24º 25º 28º 38º 40º 60º

LUK FREIR	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20018	**.01**	●	**.LED**	**.40** **.60**	**.ST**	**.9**	**.27**	830	9	350	**.DA** **.PU** **.D1**	
								.30	845				
								.40	895				
	20018	**.02**	●	**.LED**	**.40** **.60**	**.ST**	**.9**	**.27**	1271	16	500	**.DA** **.PU** **.D1**	
								.30	1616				
								.40	1682				

Reference order | ⬟ ● ■ ▼ 20018XX.RF.XX.XX.ST.9.XX.XX

LUK FREIR 2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20019	**.01**	●	**.LED**	**.40** **.60**	**.ST**	**.9**	**.27**	1660	18	350	**.DA** **.PU** **.D1**	
								.30	1690				
								.40	1790				
	**20019**	**.02**	●	**.LED**	**.40** **.60**	**.ST**	**.9**	**.27**	2542	32	500	**.DA** **.PU** **.D1**	
								.30	3232				
								.40	3364				

Reference order | ⬟ ● ■ ▼ 20019.XX.RF.XX.XX.ST.9.XX.XX

● Select finishes

● FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

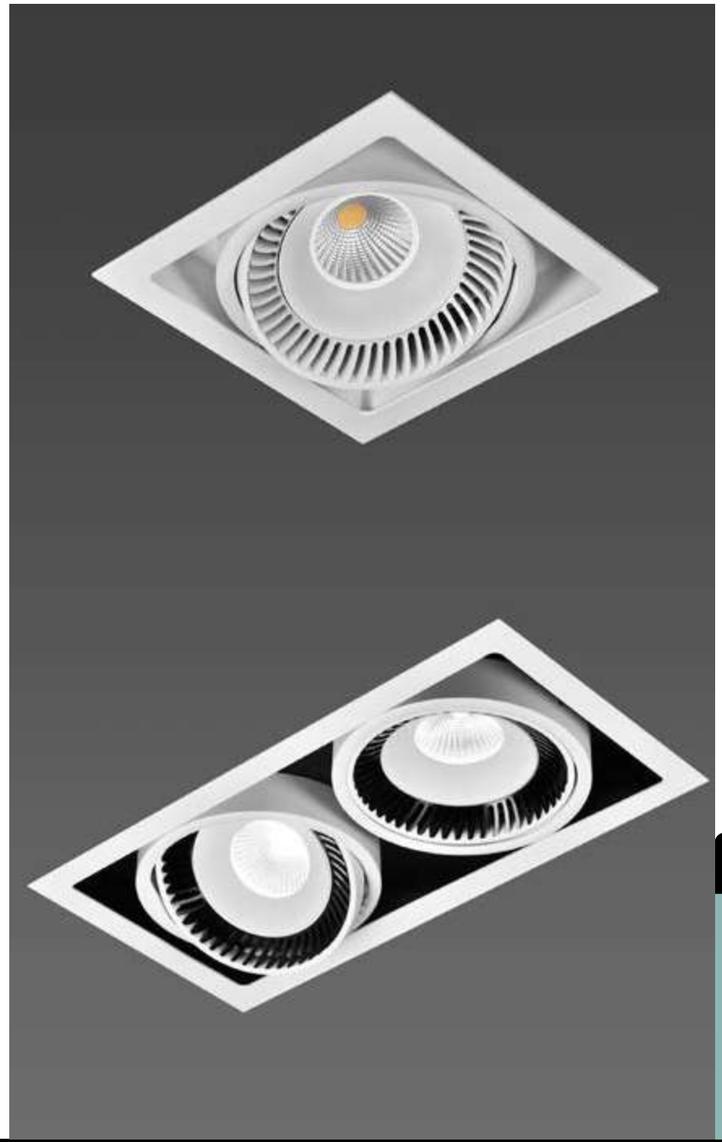

RECESSED FRAME

.RF

INSTALLATIONS

LUK
FREIR | FREIR 2

REF 20018.RF | REF 20019.RF

.SR
SURFACE

·20018 LUK FREIR ·20019 LUK FREIR 2 | SR
Pag. 344

.RF
RECESSED FRAME

·20018 LUK FREIR ·20019 LUK FREIR 2 | RF
Pag. 514

.TR
TRIMLESS

·20018 LUK FREIR ·20019 LUK FREIR 2 | TR
Pag. 680

PHOTOMETRY

LUK	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20028	**.01**	●	**.LED**	**.40** **.60**	**.ST**	**.9**	**.27**	787	14	350	**.DA** **.PU** **.D1**	
								.30	829				
								.40	876				
	20028	**.02**	●	**.LED**	**.40** **.60**	**.ST**	**.9**	**.27**	1373	16	500	**.DA** **.PU** **.D1**	
								.30	1445				
								.40	1522				

Reference order | 20028.XX.RF.XX.XX.ST.9.XX.XX

LUK 2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20071	**.01**	●	**.LED**	**.40** **.60**	**.ST**	**.9**	**.27**	1574	22	350	**.DA** **.PU** **.D1**	
								.30	1658				
								.40	1752				
	20071	**.02**	●	**.LED**	**.40** **.60**	**.ST**	**.9**	**.27**	2746	39	500	**.DA** **.PU** **.D1**	
								.30	2890				
								.40	3040				

● Select finishes

Reference order | 20071.XX.RF.XX.XX.ST.9.XX.XX

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

.RF
RECESSED FRAME

INSTALLATIONS

LUK
LUK | LUK 2
REF 20028.RF | REF 20071.RF

.RF
RECESSED FRAME

·20028 LUK ·20071 LUK 2 | RF
Pag. 516

PHOTOMETRY

CUBE SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	8201	**.01**	●	**.LED**	**.24 .40 .60**	**.ST**	**.9**	**.27**	738	11	350	**.DA .PU .D1**	
								.30	862				
								.40	929				

Reference order ⬟ ● ■ ▼ 8201.01.RF.XX.XX.ST.9.XX.XX

CUBE SQ2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	8202	**.01**	●	**.LED**	**.24 .40 .60**	**.ST**	**.9**	**.27**	1476	22	350	**.DA .PU .D1**	
								.30	1724				
								.40	1857				

Reference order ⬟ ● ■ ▼ 8202.01.RF.XX.XX.ST.9.XX.XX

CUBE SQ3	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	8203	**.01**	●	**.LED**	**.24 .40 .60**	**.ST**	**.9**	**.27**	2214	33	350	**.DA .PU .D1**	
								.30	2586				
								.40	2786				

Reference order ⬟ ● ■ ▼ 8203.01.RF.XX.XX.ST.9.XX.XX

● Select finishes

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

24º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

RECESSED FRAME

.RF

INSTALLATIONS

ALUMINIUM PC · 10° · 350° · CRI ≥90 · IK08 · IP20 IP23 · LIFE 50000H · DIM OPTIONAL · REMOTE · INDOOR · 220-240 V 50-60 Hz · CE

CUBE
SQ | SQ2 | SQ3

REF 8201.RF | REF 8202.RF | REF 8203.RF

PHOTOMETRY

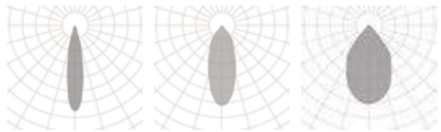

.SR
SURFACE

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | SR
Pag. 354

.RF
RECESSED FRAME

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | RF
Pag. 518

.TR
TRIMLESS

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | TR
Pag. 682

CUBE SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	8201	**.02**	●	**LED**	**.24 .40 .60**	**.ST**	**.9**	**.27**	1242	19	500	**.DA .PU .D1**	
								.30	1345				
								.40	1867				

Reference order | 8201.02.RF.XX.XX.ST.9.XX.XX

CUBE SQ2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	8202	**.02**	●	**LED**	**.24 .40 .60**	**.ST**	**.9**	**.27**	2484	38	500	**.DA .PU .D1**	
								.30	2670				
								.40	3734				

Reference order | 8202.02.RF.XX.XX.ST.9.XX.XX

CUBE SQ3	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	8203	**.02**	●	**LED**	**.24 .40 .60**	**.ST**	**.9**	**.27**	3726	58	500	**.DA .PU .D1**	
								.30	4035				
								.40	5601				

Reference order | 8203.02.RF.XX.XX.ST.9.XX.XX

● Select finishes



• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

24º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

.RF

RECESSED FRAME

INSTALLATIONS

CUBE
SQ | SQ2 | SQ3

REF 8201.RF | REF 8202.RF | REF 8203.RF

.SR
SURFACE

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | SR
Pag. 354

.RF
RECESSED FRAME

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | RF
Pag. 518

.TR
TRIMLESS

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | TR
Pag. 682

PHOTOMETRY

CUBE SPOT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	3120	**.01**	●	**.LED**	**.40** **.60**	**.ST**	**.9**	**.27**	673	12	250	**.DA** **.PU** **.D1**	
								.30	737				
								.40	801				

Reference order | 3120.01.RF.XX.XX.ST.9.XX.XX

CUBE SPOT 2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	3131	**.01**	●	**.LED**	**.40** **.60**	**.ST**	**.9**	**.27**	1345	23	250	**.DA** **.PU** **.D1**	
								.30	1475				
								.40	1603				

Reference order | 3131.01.RF.XX.XX.ST.9.XX.XX

● Select finishes

BK-BK WH-WH

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

.RF

RECESSED FRAME

INSTALLATIONS

CUBE
SPOT | SPOT 2

REF 3120.RF | 3131.RF

.RF
RECESSED FRAME

·3120 CUBE SPOT ·3131 CUBE SPOT 2 | RF
Pag. 522

PHOTOMETRY

40º 60º

CUBE SPOT MOVE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	3121	**.01**	●	**.LED**	**.40** **.60**	**.ST**	**.9**	**.27**	810	11	350	**.DA** **.PU** **.D1**	
								.30	832				
								.40	1014				

Reference order | 3121.01.RF.XX.XX.ST.9.XX.XX

CUBE SPOT 2 MOVE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	3136	**.01**	●	**.LED**	**.40** **.60**	**.ST**	**.9**	**.27**	1621	22	350	**.DA** **.PU** **.D1**	
								.30	1664				
								.40	2028				

Reference order | 3136.01.RF.XX.XX.ST.9.XX.XX

● Select finishes

BK-BK WH-WH

• FINISHES

EXTERNAL | INTERNAL COLOR

□ ■

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

.RF

RECESSED FRAME

INSTALLATIONS

CUBE
SPOT MOVE | SPOT MOVE 2

REF 3121.RF | 3136.RF

.RF
RECESSED FRAME

·3121 CUBE SPOT MOVE ·3136 CUBE SPOT MOVE 2 | RF
Pag. 524

PHOTOMETRY

40º 60º

CUBE SPOT SQ MOVE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	3134	**.01**	●	**.LED**	**.40** **.60**	**.ST**	**.9**	**.27**	810	11	350	**.DA** **.PU** **.D1**	
								.30	832				
								.40	1014				

Reference order ⬟ ● ■ ▼ 3134.01.RF.XX.XX.ST.9.XX.XX

CUBE SPOT SQ 2 MOVE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	3135	**.01**	●	**.LED**	**.40** **.60**	**.ST**	**.9**	**.27**	1621	22	350	**.DA** **.PU** **.D1**	
								.30	1664				
								.40	2028				

Reference order ⬟ ● ■ ▼ 3135.01.RF.XX.XX.ST.9.XX.XX

● Select finishes

BK-BK WH-WH

● FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

.RF

RECESSED FRAME

INSTALLATIONS

CUBE
SPOT SQ MOVE | SPOT SQ2 MOVE
REF 3134.RF | REF 3135.RF

.RF
RECESSED FRAME

·3134 CUBE SPOT SQ MOVE ·3135 CUBE SPOT SQ 2 MOVE | RF
Pag. 526

PHOTOMETRY

40º 60º

CAN REVIEW	REF.	DIMEN-SIONS	FINISHES	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20149	**.01**	●	**.40 .60**	**.ST**	**.9**	**.27**	711	10	250	**.DA .PU .D1**	
							.30	748				
							.40	776				
	20149	**.02**	●	**.40 .60**	**.ST**	**.9**	**.27**	1422	20	500	**.DA .PU .D1**	
							.30	1496				
							.40	1552				
	20149	**.03**	●	**.40 .60**	**.ST**	**.9**	**.27**	2132	30	750	**.DA .PU .D1**	
							.30	2244				
							.40	2327				
	20149	**.04**	●	**.40 .60**	**.ST**	**.9**	**.27**	3610	40	1000	**.DA .PU .D1**	
							.30	3690				
							.40	4200				
	20149	**.05**	●	**.40 .60**	**.ST**	**.9**	**.27**	4155	50	1200	**.DA .PU .D1**	
							.30	4462				
							.40	4961				

● Select external - internal finishes

BK-BK WH-WH

Reference order | 20149.XX.RF.XX.XX.ST.9.XX.XX

• FINISHES

COLORS

DIMENSIONS

● View in family specifications

.01 | .02 | .03 | .04 | .05

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

INSTALLATIONS

CAN REVIEW

REF 20149.RF

PHOTOMETRY

40º 60º

.RF
RECESSED FRAME

·20149 CAN REVIEW | RF
Pag. 528

ALDAIA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20157	**.01**	●	**.LED**	**.OP**	**.ST**	**.9**	**.27**	691	9	300	**.DA .PU .D1**	
								.30	727				
								.40	761				
	20157	**.02**	●	**.LED**	**.OP**	**.ST**	**.9**	**.27**	1227	16	500	**.DA .PU .D1**	
								.30	1292				
								.40	1309				
	20157	**.03**	●	**.LED**	**.OP**	**.ST**	**.9**	**.27**	2394	32	1050	**.DA .PU .D1**	
								.30	2520				
								.40	2678				

Reference order | 20157.XX.RF.XX.XX.ST.9.XX.XX

• FINISHES

COLORS

□ ■

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

.RF

RECESSED FRAME

● Select finishes

BK-BK WH-WH

INSTALLATIONS

ALDAIA

REF 20157.RF

.RF
RECESSED FRAME

·20157 ALDAIA | RF
Pag. 530

PHOTOMETRY

OPAL

ALDAIA SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20120	**.01**	●	**.LED**	**.OP**	**.ST**	**.9**	**.27**	691	9	300	**.DA .PU .D1**	
								.30	727				
								.40	761				
	20120	**.02**	●	**.LED**	**.OP**	**.ST**	**.9**	**.27**	1227	16	500	**.DA .PU .D1**	
								.30	1292				
								.40	1309				
	20120	**.03**	●	**.LED**	**.OP**	**.ST**	**.9**	**.27**	2394	32	1050	**.DA .PU .D1**	
								.30	2520				
								.40	2678				

Reference order | 20120.XX.RF.XX.XX.ST.9.XX.XX

• FINISHES

COLORS

□ ■

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

.RF

RECESSED FRAME

● Select finishes

BK-BK WH-WH

INSTALLATIONS

ALDAIA SQ

REF 20120.RF

.RF
RECESSED FRAME

·20120 ALDAIA SQ | RF
Pag. 532

PHOTOMETRY

OPAL

VADI	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	3177	**.01**	●	**.LED**	**.40** **.60**	**.ST**	**.9**	**.27**	703	10	500	**.DA** **.PU** **.D1**	
								.30	740				
								.40	784				
	3177	**.02**	●	**.LED**	**.40** **.60**	**.ST**	**.9**	**.27**	1373	16	500	**.DA** **.PU** **.D1**	
								.30	1445				
								.40	1522				

Reference order | ⬟ ● ■ ▼ 3177.XX.RF.XX.XX.ST.9.XX.XX

• FINISHES

COLORS

□

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

● Select finishes

WH-WH

INSTALLATIONS

VADI

REF 3177.RF

.RF
RECESSED FRAME

·3177 VADI | RF
Pag. 534

PHOTOMETRY

40º

60º

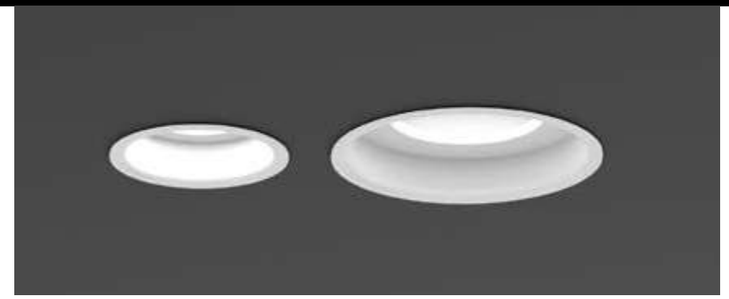

CASTEJON	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20074	.01	●	G5.3		GU5.3	-			50	-		Ø83 200
				GU10	.GU	GU10				50			
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	150 Ø92
								.30	570				
								.40	711				

Reference order | 20074.01.RF.XX.XX.XX.X.XX.XX

CASTEJON SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20073	.01	●	G5.3		GU5.3	-			50	-		83x83 200
				GU10	.GU	GU10				50			
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	150 92 92
								.30	570				
								.40	711				

Reference order | 20073.01.RF.XX.XX.XX.X.XX.XX

● Select finishes

BK-BK WH-WH

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

.RF
RECESSED FRAME

RECESSED FRAME

INSTALLATIONS

CASTEJON
CASTEJON SQ

REF 20074.RF | REF 20073.RF

PHOTOMETRY

40º 60º

.RF
RECESSED FRAME

·20074 CASTEJON ·20073 CASTEJON SQ | RF
Pag. 536

ROY	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20154	**.01**	●	**.LED**	**.18 .25 .38 .60**	**.ST**	**.9**	**.27**	779	10	250	**.DA .PU .D1**	
								.30	820				
								.40	860				

Reference order | 20154.01.RF.XX.XX.ST.9.XX.XX

● Select finishes

BK-BK WH-WH

● FINISHES

COLORS

□ ■

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

18º | 25º | 38º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

INSTALLATIONS

ROY

REF 20154.RF

PHOTOMETRY

18º 25º 38º 60º

.RF
RECESSED FRAME

·20154 ROY | RF
Pag. 538

SU	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	3149	**.01**	●	**.LED**	**.60**	**.ST**	**.9**	**.27**	260	5	350	**.DA .PU .D1**	
								.30	303				
								.40	544				
	3149	**.02**	●	**.LED**	**.30**	**.ST**	**.9**	**.27**	550	8	350	**.DA .PU .D1**	
								.30	639				
								.40	644				

Reference order | 3149.XX.RF.XX.XX.ST.9.XX.XX

SU SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	3150	**.01**	●	**.LED**	**.60**	**.ST**	**.9**	**.27**	178	5	350	**.DA .PU .D1**	
								.30	187				
								.40	196				
	3150	**.02**	●	**.LED**	**.32**	**.ST**	**.9**	**.27**	513	7	350	**.DA .PU .D1**	
								.30	540				
								.40	570				

● Select finishes

.WH-WH .BK-BK .GY-GY .SA-SA

Reference order | 3150.XX.RF.XX.XX.ST.9.XX.XX

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

30º | 32º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

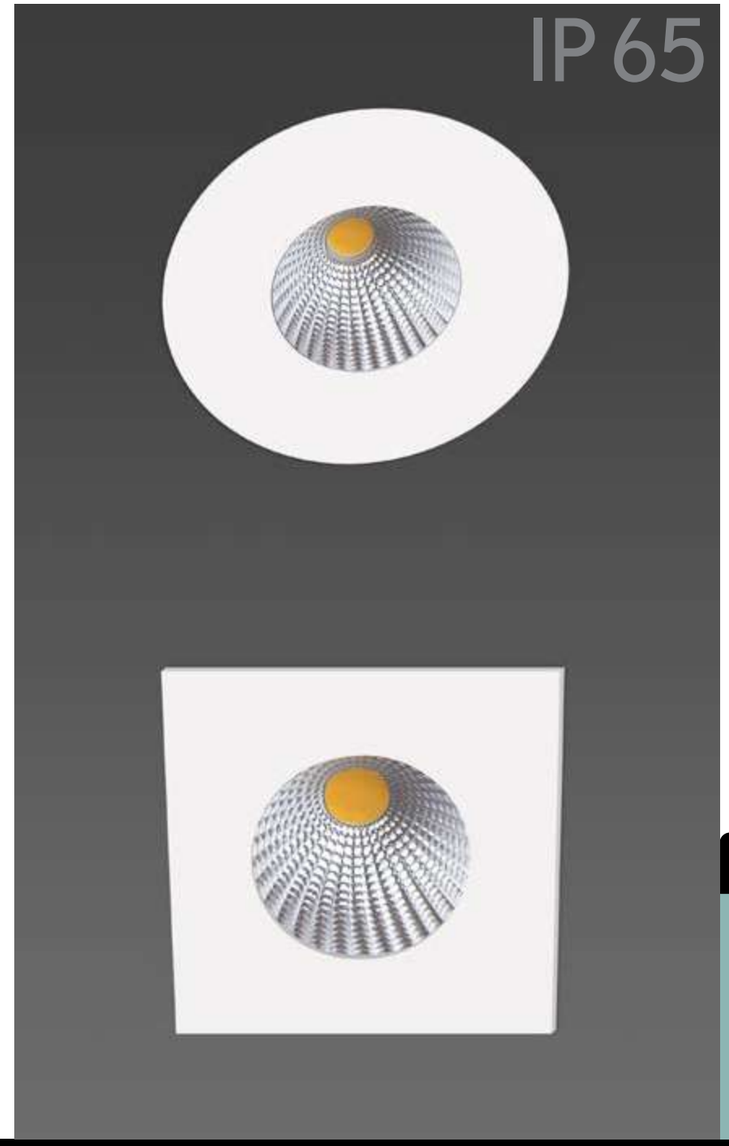

.RF

RECESSED FRAME

INSTALLATIONS

SU
SU SQ

REF 3149.RF | REF 3150.RF

PHOTOMETRY

30º 32º 60º

.RF
RECESSED FRAME

·3149 SU ·3150 SU SQ | RF
Pag. 540

SU OTIS	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	3234	**.01**	●	**.LED**	**.24** **.40** **.60**	**.ST**	**.9**	**.27**	578	10	500	**.DA** **.PU** **.D1**	
								.30	605				
								.40	663				
	3234	**.02**	●	**.LED**	**.40**	**.ST**	**.9**	**.27**	867	15	500	**.DA** **.PU** **.D1**	
								.30	908				
								.40	995				

Reference order | 3234.XX.RF.XX.XX.ST.9.XX.XX

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

24º 40º 60º | 40º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

.RF

RECESSED FRAME

● Select finishes

BK-BK WH-WH

INSTALLATIONS

SU
OTIS

REF 3234.RF

.RF
RECESSED FRAME

·3234 SU OTIS | RF
Pag. 542

PHOTOMETRY

24º 40º 60º

BASIT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	8012	.01	.WH-WH .BK-BK	G5.3		GU5.3	-			50	-		67x67 120
				GU10	.GU	GU10				50			
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	86 80 80
								.30	570				
								.40	711				

Reference order | 8012.01.RF.XX.XX.XX.X.XX.XX

BASIT MOVE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	8013	.01	●	G5.3		GU5.3	-			50	-		78x78 120
				GU10	.GU	GU10				50			
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	53 90 90
								.30	570				
								.40	711				

Reference order | 8013.01.RF.XX.XX.XX.X.XX.XX

● Select finishes

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

INSTALLATIONS

BASIT
BASIT MOVE

REF 8012.RF | 8013.RF

PHOTOMETRY

20º 40º

.RF
RECESSED FRAME

·8012 BASIT ·8013 BASIT MOVE | RF
Pag. 544

BASIT MONET	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20130	**.01**	●	**.LED**	**.25** **.38** **.50**	**.ST**	**.9**	**.27**	817	12	300	**.DA** **.PU** **.D1**	
								.30	854				
								.40	1002				

Reference order 20130.01.RF.XX.XX.ST.9.XX.XX

BASIT MONET 2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20131	**.01**	●	**.LED**	**.25** **.38** **.50**	**.ST**	**.9**	**.27**	1633	25	300	**.DA** **.PU** **.D1**	
								.30	1707				
								.40	2005				

Reference order 20131.01.RF.XX.XX.ST.9.XX.XX

● Select finishes



• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

25º | 38º | 50º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

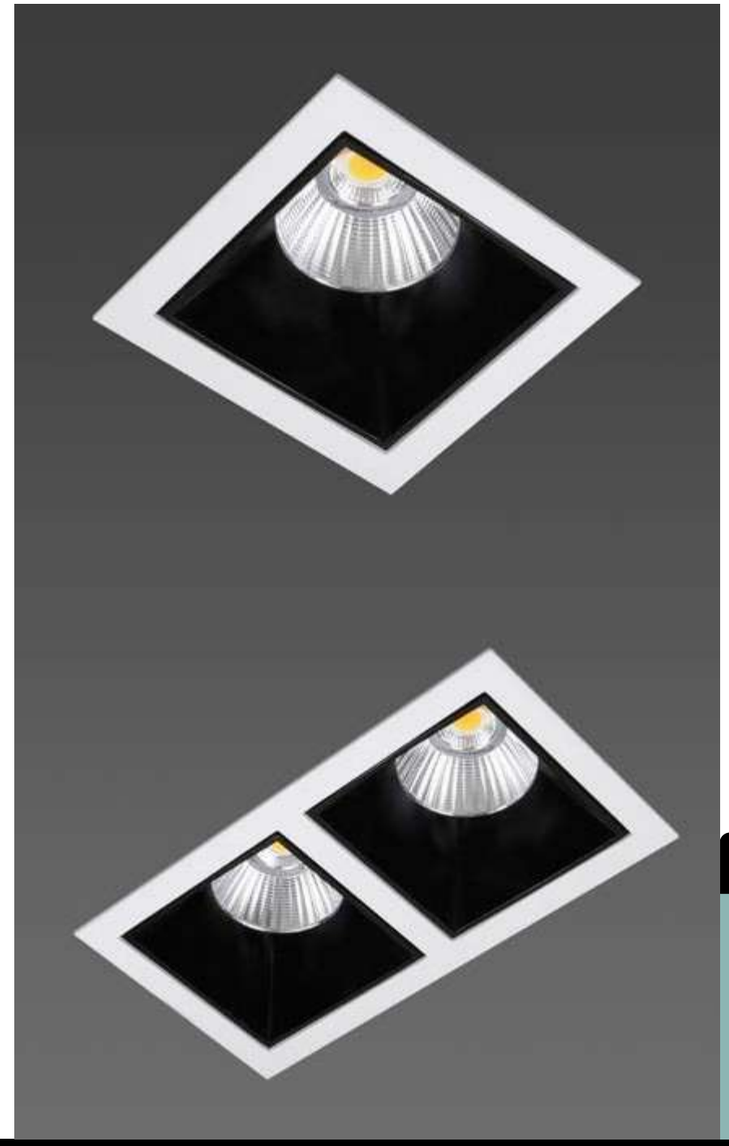

.RF

RECESSED FRAME

INSTALLATIONS

BASIT
MONET | MONET 2

REF 20130.RF | REF 20131.RF

.RF
RECESSED FRAME

·20130 BASIT MONET ·20131 BASIT MONET 2 | RF
Pag. 546

PHOTOMETRY

BASIT LLORENS	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20140	**.01**	●	**.LED**	**.24**	**.ST**	**.9**	**.27**	370	9	300	**.DA .PU .D1**	
								.30	526				
								.40	607				
	20140	**.02**	●	**.LED**	**.24**	**.ST**	**.9**	**.27**	370	12	300	**.DA .PU .D1**	
								.30	915				
								.40	907				

Reference order | 20140.XX.RF.XX.XX.ST.9.XX.XX

BASIT LLORENS SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20144	**.01**	●	**.LED**	**.24**	**.ST**	**.9**	**.27**	370	8	300	**.DA .PU .D1**	
								.30	526				
								.40	607				
	20144	**.02**	●	**.LED**	**.24**	**.ST**	**.9**	**.27**	730	12	300	**.DA .PU .D1**	
								.30	915				
								.40	807				

● Select finishes

WH-WH

Reference order | 20144.XX.RF.XX.XX.ST.9.XX.XX

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

24º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

.RF

RECESSED FRAME

INSTALLATIONS

BASIT
LLORENS | LLORENS SQ

REF 20140.RF | REF 20144.RF

PHOTOMETRY

24º

.RF
RECESSED FRAME

·20140 BASIT LLORENS ·20144 BASIT LLORENS SQ | RF
Pag. 548

BASIT DERIN	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	8010	**.01**	●	**.G5**	GU5.3	-			50	-		107x107 / 115 / 90 / 120 / 120
				.GU	GU10				50			

Reference order | 8010.01.RF.XX.XX.XX.X.XX.XX

• FINISHES

COLORS

□

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ LAMP

GU5.3 | GU10

POWER

-

CRI

-

COLOR TEMPERATURE

-

▼ DIMMABLE OPTIONS

-

▲ LIGHT DISTRIBUTION

DOWN

.RF

RECESSED FRAME

● Select finishes

WH-WH

ALUMINIUM PC | 20° | 97° | CRI ≥90 | IK06 | IP20 IP23 | LIFE 50000H | DIM OPTIONAL | | REMOTE | INDOOR | | | 220-240 V 50-60 Hz | CE

BASIT DERIN

REF 8010.RF

INSTALLATIONS

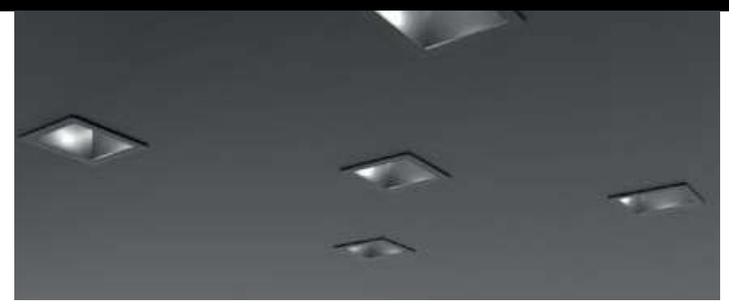

.RF
RECESSED FRAME

·8010 BASIT DERIN | RF
Pag. 550

KONI	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	3161	**.01**[*1]	**.WH-WH .BK-BK .GY-GY**	**G5.3**		GU5.3	-			50	-		Ø75 LED 94
				GU10	**.GU**	GU10				50			GU 121
				LED	**.40 .60**	**.ST** BPM50	**.9**	**.27**	526	8	350	**.DA .PU .D1**	39 Ø80
								.30	570				
								.40	711				
45°	**3161**	**.02**	●	**G5.3**		GU5.3	-			50	-		Ø93 LED 86
				GU10	**.GU**	GU10				50			GU 143
				LED	**.40 .60**	**.ST** BPM50	**.9**	**.27**	526	8	350	**.DA .PU .D1**	61 Ø98
								.30	570				
								.40	711				
	3161	**.03**	**.WH-WH .BK-BK**	**G5.3**		GX5.3	-			100	-		Ø167 GU/CD 219
				GU10	**.GU**	GU10				75			82 Ø180
				CDMR	**.CD**	GX8.5				70			

● Select finishes

.WH-WH .BK-BK .GY-GY .SA-SA

*[1] Model 3161.01 does not tilt. *El modelo 3161.01 no bascula*

Reference order | 3161.XX.RF.XX.XX.XX.X.XX.XX

• FINISHES

EXTERNAL | INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10 | CDMR

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

.RF
RECESSED FRAME

RECESSED FRAME

INSTALLATIONS

KONI

REF 3161.RF

.RF
RECESSED FRAME

·3161 KONI | RF
Pag. 552

PHOTOMETRY

40º 60º

KONI SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	3169	.01	●	G5.3		GU5.3	-			50	-		80x80 LED 135 GU 135
				GU10	.GU	GU10				50			
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	65 90 90
								.30	570				
								.40	711				

Reference order | ⬟ ● ■ ▼ 3169.01.RF.XX.XX.XX.X.XX.XX

• FINISHES

COLORS

□ ■

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

new

.RF
RECESSED FRAME

RECESSED FRAME

• Select finishes

BK-BK WH-WH

INSTALLATIONS

KONI SQ

REF 3169.RF

PHOTOMETRY

40º

60º

·3169 KONI SQ | RF
Pag. 554

KONI DEEP	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	3171	.01	●	G5.3		GU5.3	-			50	-		Ø77 LED 180
				GU10	.GU	GU10				50			GU 155
				LED	.40 .60	.ST BPM50	.9	.27	526	8	700	.DA .PU .D1	83 Ø83
								.30	570				
								.40	711				

Reference order | 3171.01.RF.XX.XX.ST.9.XX.XX

• FINISHES

COLORS

□ ■

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

new

.RF
RECESSED FRAME

RECESSED FRAME

● Select finishes

BK-BK

WH-WH

INSTALLATIONS

KONI DEEP

REF 3171.RF

PHOTOMETRY

40º



60º

.RF
RECESSED FRAME

·3171 KONI DEEP | RF
Pag. 556

KONI TURTA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	3156	**.01**[*1]	●	**.LED**	**.40** **.60**	**.ST**	**.9**	**.27**	513	6	350	**.DA** **.PU** **.D1**	
								.30	540				
								.40	574				
	3156	**.02**	●	**.LED**	**.40** **.60**	**.ST**	**.9**	**.27**	513	6	350	**.DA** **.PU** **.D1**	
								.30	540				
								.40	574				

Reference order | 3156.XX.RF.XX.XX.ST.9.XX.XX

● Select finishes

BK-BK

WH-WH

*[1] Model 3156.01 does not tilt or rotate. *El modelo 3156.01 no bascula ni gira.*

• FINISHES

COLORS

□ ■

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

INSTALLATIONS

KONI TURTA

REF 3156.RF

PHOTOMETRY

40º

60º

.RF
RECESSED FRAME

·3156 KONI TURTA | RF
Pag. 558

CATLI	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	3010	**.01**	●	**GU5.3**		GU5.3	-			8	-		Ø80 LED 67 GU 88
				GU10	**.GU**	GU10							
				LED	**.40 .60**	**.ST** BPM50	**.9**	**.27**	526	8	350	**.DA .PU .D1**	25 Ø 93
								.30	570				
								.40	711				
						.HI BPM300		**.27**	707	10	500		
								.30	927				
								.40	767				
	3010	**.02**	●	**G53**		G53	-			8	-		Ø150 LED 106 GU/CD 163
				GU10	**.GU**	GU10							
				CDMR	**.CD**	GX8.5							
				LED	**.40 .60**	**.ST** BPM3181	**.9**	**.27**	1538	16	500	**.DA .PU .D1**	26 Ø 170
								.30	1722				
								.40	1355				

Reference order ⬟ ● ■ ▼

3010.XX.RF.XX.XX.XX.X.XX.XX

● Select intenal - external finishes

.WH-WH .BK-BK .SA-SA

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10 | CDMR

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

.RF

RECESSED FRAME

INSTALLATIONS

ALUMINIUM PC | 45° | 350° | CRI ≥90 | IK06 | IP20 IP23 | LIFE 50000H | DIM OPTIONAL | REMOTE | INDOOR | 220-240 V 50-60 Hz

CATLI

REF 3010.RF

.SR
SURFACE

·3010 CATLI | SR
Pag. 362

.RF
RECESSED FRAME

·3010 CATLI | RF
Pag. 560

PHOTOMETRY

40º

60º

CATLI SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	3011	**.01**	●	**G5.3**		GU5.3	-			8	-		LED 67 / Ø80 / GU 88
				GU10	**.GU**	GU10							
				LED	**.40 .60**	**.ST** BPM50	**.9**	**.27**	526	8	350	**.DA .PU .D1**	25 / 94x94
								.30	570				
								.40	711				
						.HI BPM300		**.27**	707	10	500		
								.30	927				
								.40	767				
	3011	**.02**	●	**G5.3**		G53	-			8	-		LED 106 / Ø150 / GU/CD 163
				GU10	**.GU**	GU10							
				CDMR	**.CD**	GX8.5							
				LED	**.40 .60**	**.ST** BPM3181	**.9**	**.27**	1538	16	500	**.DA .PU .D1**	26 / 170x170
								.30	1722				
								.40	1355				

Reference order | 3011.XX.RF.XX.XX.XX.X.XX.XX

⬟ ● ■ ▼

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10 | CDMR

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

.RF

RECESSED FRAME

● Select finishes



.WH-WH .BK-BK .SA-SA

INSTALLATIONS

ALUMINIUM PC | 45° | 350° | CRI ≥90 | IK06 | IP20 IP23 | LIFE 50000H | DIM OPTIONAL | REMOTE | INDOOR | 220-240 V 50-60 Hz | CE

CATLI SQ

REF 3011.RF

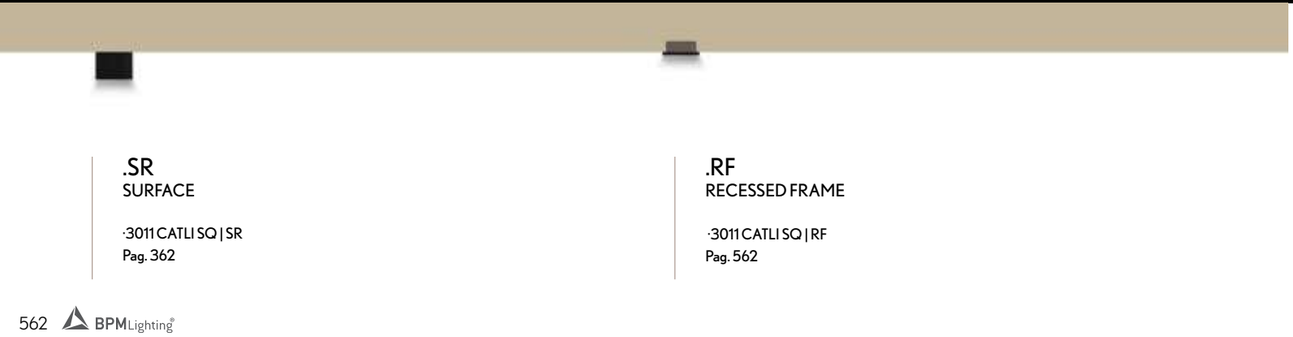

.SR
SURFACE

·3011 CATLI SQ | SR
Pag. 362

.RF
RECESSED FRAME

·3011 CATLI SQ | RF
Pag. 562

PHOTOMETRY

40º

60º

CATLI SQ2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	3012	**.01**	●	**G5.3**		GU5.3	-			16	-		170x80 / LED 67 / GU 88
				GU10	**.GU**	GU10							
				LED	**.40 .60**	**.ST** BPM50	**.9**	**.27**	1052	16	350	**.DA .PU .D1**	25 / 94 / 186
								.30	1140				
								.40	1422				
						.HI BPM300		**.27**	1414	20	500		
								.30	1854				
								.40	1534				

	3012	**.02**	●	**G5.3**		G5.3	-			16	-		320x160 / LED 106 / GU/CD 163
				GU10	**.GU**	GU10							
				CDMR	**.CD**	GX8.5							
				LED	**.40 .60**	**.ST** BPM3181	**.9**	**.27**	3076	32	500	**.DA .PU .D1**	25 / 170 / 340
								.30	3444				
								.40	2710				

Reference order | 3012.XX.RF.XX.XX.XX.X.XX.XX

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10 | CDMR

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

● Select finishes

.WH-WH .BK-BK .SA-SA

.RF
RECESSED FRAME

RECESSED FRAME

INSTALLATIONS

CATLI SQ2

REF 3012.RF

·3012 CATLI SQ2 | RF
Pag. 564

PHOTOMETRY

40º 60º

CATLI SQ3	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	3013	.01	●	G5.3		GU5.3	-			50	-		265x80 / LED 67 / GU 88
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	1.578	24	350	.DA .PU .D1	25 / 94 / 283
								.30	1.710				
								.40	2.133				
						.HI BPM300		.27	2.121	30	500		
								.30	2.781				
								.40	2.301				
	3013	.02	●	G5.3		G53	-			100	-		480x160 / LED 106 / GU/CD 163
				GU10	.GU	GU10				75			
				CDMR	.CD	GX8.5				70			
				LED	.40 .60	.ST BPM3181	.9	.27	4.614	48	500	.DA .PU .D1	25 / 170 / 500
								.30	5.166				
								.40	4.065				

Reference order | 3013.XX.RF.XX.XX.XX.X.XX.XX

● Select finishes

.WH-WH .BK-BK .SA-SA

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10 | CDMR

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

INSTALLATIONS

CATLI SQ3

REF 3013.RF

.RF
RECESSED FRAME

·3013 CATLI SQ3 | RF
Pag. 566

PHOTOMETRY

40º

60º

CATLI HALKA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	3017	.01	●	G5.3		GU5.3	-			50	-		Ø70 LED 55 GU 85
				GU10	.GU	GU10				50			
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	27 Ø83
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	767				

Reference order | 3017.01.RF.XX.XX.XX.X.XX.XX

CATLI HALKASQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	3021	.01	.WH-WH .BK-BK	G5.3		GU5.3	-			50	-		Ø68 LED 55 GU 85
				GU10	.GU	GU10				50			
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	27 80X80
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	767				

Reference order | 3021.01.RF.XX.XX.XX.X.XX.XX

● Select finishes

.WH-WH .BK-BK .SA-SA

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

RECESSED FRAME

INSTALLATIONS

CATLI HALKA | HALKA SQ

REF 3017.RF | 3021.RF

.RF
RECESSED FRAME

·3017 CATLI HALKA | RF ·3021 CATLI HALKA SQ | RF
Pag. 568

PHOTOMETRY

40º 60º

CATLI ODALKI	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	3018	.01	●	G5.3		GU5.3	-			50	-		Ø60 LED 55 GU 85
				GU10	.GU	GU10				50			
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	26 Ø75
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	767				

Reference order | 3018.01.RF.XX.XX.XX.X.XX.XX

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

● Select finishes

.WH-WH .BK-BK .SA-SA

INSTALLATIONS

CATLI ODALKI

REF 3018.RF

.RF
RECESSED FRAME

·3018 CATLI ODALKI | RF
Pag. 570

PHOTOMETRY

40º 60º

CATLI CLASSIC	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	3005	**.01**	●	**G5.3**		GU5.3	-			50	-		Ø60 LED 55
				GU10	**.GU**	GU10				50			GU 100
				LED	**.40 .60**	**.ST** BPM50	**.9**	**.27**	526	8	350	**.DA .PU .D1**	25 Ø85
								.30	570				
								.40	711				
						.HI BPM300		**.27**	707	10	500		
								.30	927				
								.40	767				

Reference order ⬟ ● ■ ▼

3005.01.RF.XX.XX.XX.X.XX.XX

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

.RF

RECESSED FRAME

● Select finishes

.WH-WH .BK-BK .SA-SA

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

INSTALLATIONS

CATLI CLASSIC

REF 3005.RF

PHOTOMETRY

40º 60º

.RF
RECESSED FRAME

·3005 CATLI CLASSIC | RF
Pag. 572

CATLI CLASSIC SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	3006	**.01**	●	**G5.3**		GU5.3	-			50	-		Ø60 LED 55
				GU10	**.GU**	GU10				50			GU 100
				LED	**.40 .60**	**.ST** BPM50	**.9**	**.27**	526	8	350	**.DA .PU .D1**	26 85x85
								.30	570				
								.40	711				
						.HI BPM300		**.27**	707	10	500		
								.30	927				
								.40	767				

Reference order | ⬟ ● ■ ▼ 3006.01.RF.XX.XX.XX.X.XX.XX

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

.RF

RECESSED FRAME

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

● Select finishes

.WH-WH .BK-BK .SA-SA

INSTALLATIONS

CATLI
CLASSIC SQ

REF 3006.RF

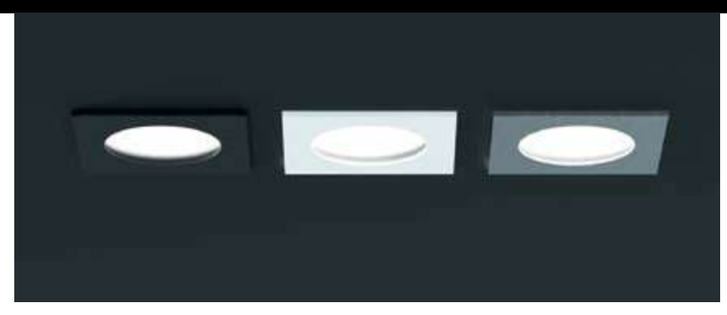

PHOTOMETRY



40º 60º

.RF
RECESSED FRAME

·3006 CATLI CLASSIC SQ | RF
Pag. 574

CATLI CARE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	3000	**.01**	●	**G5.3**		GU5.3	-			50	-		Ø85 / LED 70 / GU 85
				GU10	**.GU**	GU10				50			
				LED	**.40 .60**	.ST BPM50	**.9**	**.27**	526	8	350	**.DA .PU .D1**	25 / 90x90
								.30	570				
								.40	711				
						.HI BPM300		**.27**	707	10	500		
								.30	927				
								.40	767				

Reference order | 3000.01.RF.XX.XX.XX.X.XX.XX

CATLI CARE 2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	**3001**	**.01**	●	**G5.3**		GU5.3	-			100	-		150x70 / LED 70 / GU 85
				GU10	**.GU**	GU10				100			
				LED	**.40 .60**	.ST BPM50	**.9**	**.27**	1.052	16	350	**.DA .PU .D1**	25 / 180x90
								.30	1.140				
								.40	1.422				
						.HI BPM300		**.27**	1.414	20	500		
								.30	1.854				
								.40	1.534				

Reference order | 3001.01.RF.XX.XX.XX.X.XX.XX

● Select finishes

.WH-WH .SA-SA

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

.RF
RECESSED FRAME

INSTALLATIONS

ALUMINIUM PC | 25º | 0º | CRI ≥90 | IK06 | IP20 IP23 | LIFE 50000H | DIM OPTIONAL | REMOTE | IK06 | 220-240 V 50-60 Hz | CE

CATLI
CARE | CARE 2

REF 3000.RF | 3001.RF

PHOTOMETRY

40º

60º

.RF
RECESSED FRAME

·3000 CATLI CARE ·3001 CATLI CARE 2 |RF
Pag. 576

TRIMLESS

ALABAMA

ALABAMA

10158 PAG. 580

ALTAIR

ALTAIR

10172 PAG. 584

OHIO

OHIO

10188 PAG. 588

OHIO SQ

10204 PAG. 592

FLORIDA

FLORIDA

10190 PAG. 596

FLORIDA SQ

10191 PAG. 600

ALBERTA

ALBERTA

10176 PAG. 604

EYE

EYE

210016 PAG. 610

ALARIK

ALARIK MINI

210006 PAG. 614

ALARIK SLIM

20224 PAG. 622

ALARIK

10225 PAG. 628

MODULIGHT

MODULIGHT

10210 PAG. 634

ALBA

ALBA MINI

10211 PAG. 640

ALBA

10160 PAG. 644

ALBA ASIMETRIC

210009 PAG. 648

ALBA PLUS

10178 PAG. 652

ALBA PLUS ASIMETRIC

210008 PAG. 656

WING

WING

10200 PAG. 660

LENT

LENT MODULAR

10216 PAG. 666

SASSY

SASSY

410002 PAG. 668

SASSY SQ

410003 PAG. 672

MARTORELL

MARTORELL

20115 PAG. 676

MARTORELL TARREGA

20117 PAG. 678

MARTORELL TARREGA SQ

20118 PAG. 678

LUK

LUK FREIR

20018 PAG. 680

LUK FREIR 2

20019 PAG. 680

CUBE

CUBE

8201 PAG. 682

CUBE SQ2

8202 PAG. 682

CUBE SQ3

8203 PAG. 682

VITA

VITA

30007 PAG. 688

VOLCANO

VOLCANO

10062 PAG. 690

VOLCANO DEEP

10063 PAG. 692

VISUAL INDEX

ESPIGA

ESPIGA

10086 PAG. 694

ESPIGA SQ

10083 PAG. 696

ESPIGA SIRIO

10077 PAG. 698

ESPIGA SIRIO TWINS

30000 PAG. 700

ESPIGA ORIONIS

10080 PAG. 702

ESPIGA ORIONIS TWINS

30001 PAG. 704

ZENIT

ZENIT

10123 PAG. 706

ZENIT SQ

30002 PAG. 706

ZENIT DEEP

30004 PAG. 708

ZENIT DEEP TWINS

30005 PAG. 709

ZENIT MOVE

10125 PAG. 710

ZENIT MOVE SQ

30003 PAG. 711

ZENIT ORTO

10126 PAG. 712

ZENIT SIDEREA

10050 PAG. XXX

ZENIT ZUBIA

10122 PAG. XXX

ZENIT ZUBIA SQ

10121 PAG. XXX

SUNSET

SUNSET

10124 PAG. 716

VEGA

VEGA ADHARA

10016 PAG. 718

VEGA ADHARA TWINS

10066 PAG. 720

VEGA

10028 PAG. 722

VEGA TWINS

10070 PAG. 724

VEGA ZETA

10001 PAG. 726

VEGA ZETA SQ

10019 PAG. 728

VEGA ZETA SQ TWINS

10072 PAG. 730

CENTAURO

CENTAURO

10109 PAG. 732

FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm.

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
CRI 80
Motion Detection
RGB
Wireless Control Options (Casambi)

* Accesories are delivered separately (not installed in luminaire).

.TR

TRIMLESS

INSTALLATIONS

ALABAMA

REF 10158.TR

.PN
PENDANT

·10158 ALABAMA | PN
Pag. 78

.SR
SURFACE

·10158 ALABAMA | SR
Pag. 78

.RF
RECESSED FRAME

·10158 ALABAMA | RF
Pag. 396

.TR
TRIMLESS

·10158 ALABAMA | TR
Pag. 580



ALABAMA	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10158	**.35**	●	**.OP .MP**	**.ST**	**.9**	**.27**	-	18	500	**.DA .PU .D1**	
							.30	2385				
							.40	2475				
						.8	**.TW**	-	-	-	**.DA**	
					.HI	**.9**	**.27**	-	35	500	**.DA .PU .D1**	
							.30	4767				
							.40	4956				
	10158	**.45**	●	**.OP .MP**	**.ST**	**.9**	**.27**	4590	35	500	**.DA .PU .D1**	
							.30	4770				
							.40	4950				
						.8	**.TW**	11400 - 11820	76	700	**.DA**	
					.HI	**.9**	**.27**	9180	71	**500**	**.DA .PU .D1**	
							.30	9534				
							.40	9912				
	10158	**.65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	9180	71	500	**.DA .PU .D1**	
							.30	9540				
							.40	9900				
						.8	**.TW**	22800-23640	152	700	**.DA**	
					.HI	**.9**	**.27**	18360	142	500	**.DA .PU .D1**	
							.30	19068				
							.40	19824				
	10158	**.95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	16830	130	500	**.DA .PU .D1**	
							.30	17490				
							.40	18150				
						.8	**.TW**	41800-43340	279	700	**.DA**	
					.HI	**.9**	**.27**	33660	260	500	**.DA .PU .D1**	
							.30	34958				
							.40	36344				
	10158	**.125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	27540	212	500	**.DA .PU .D1**	
							.30	28620				
							.40	29700				
						.8	**.TW**	68400-70920	457	700	**.DA**	
					.HI	**.9**	**.27**	55080	425	500	**.DA .PU .D1**	
							.30	57204				
							.40	59472				

Reference order | 10158.XX.TR.XX.XX.XX.X.XX.XX

● Select finishes

ALABAMA

REF 10158.TR

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED

TR mounting KIT

PROFILE



FINISHES

● COLORS

□

DIMENSIONS

⬟ SIZES mm.

393x 393 | 593x 593 | 893x 893 | 1193x 1193

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
CRI 80
Motion Detection
RGB
Wireless Control Options (Casambi)

* Accesories are delivered separately (not installed in luminaire).

.TR

TRIMLESS

ALTAIR

REF 10172.TR

INSTALLATIONS

.PN
PENDANT

·10172 ALTAIR | PN
Pag. 82

.SR
SURFACE

·10172 ALTAIR | SR
Pag. 82

.TR
TRIMLESS

·10172 ALTAIR | TR
Pag. 584

ALTAIR	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10172	.45	●	.OP .MP	.ST	.9	.27	3060	24	500	.DA .PU .D1	
							.30	3180				
							.40	3300				
						.8	.TW	7600 - 7880	51	700	.DA	
					.HI	.9	.27	6120	47	500	.DA .PU .D1	
							.30	6356				
							.40	6608				
	10172	.65	●	.OP .MP	.ST	.9	.27	6120	47	500	.DA .PU .D1	
							.30	6360				
							.40	6600				
						.8	.TW	15200 - 15760	102	700	.DA	
					.HI	.9	.27	12240	94	500	.DA .PU .D1	
							.30	12712				
							.40	13216				
	10172	.95	●	.OP .MP	.ST	.9	.27	11475	89	500	.DA .PU .D1	
							.30	11925				
							.40	12375				
						.8	.TW	28500 - 29550	191	700	.DA	
					.HI	.9	.27	22950	177	500	.DA .PU .D1	
							.30	23835				
							.40	24780				
	10172	.125	●	.OP .MP	.ST	.9	.27	18360	142	500	.DA .PU .D1	
							.30	19080				
							.40	19800				
						.8	.TW	45600 - 47280	305	700	.DA	
					.HI	.9	.27	36720	283	500	.DA .PU .D1	
							.30	38136				
							.40	39648				

Reference order | 10172.XX.TR.XX.XX.XX.X.XX.XX

.TR

TRIMLESS

- Select finishes

.WH-WH

ALTAIR

REF 10172.TR

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED

TR mounting KIT

PROFILE



FINISHES

● COLORS

DIMENSIONS

⬟ DIAMETERS mm.

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

ON DEMAND

Special Color Temperature
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

.TR

TRIMLESS

INSTALLATIONS



OHIO

REF 10188.TR

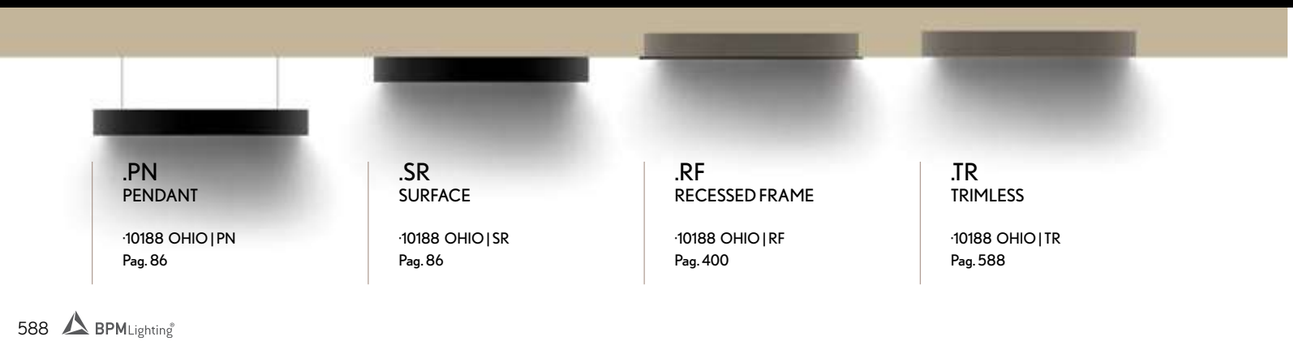

.PN
PENDANT

·10188 OHIO | PN
Pag. 86

.SR
SURFACE

·10188 OHIO | SR
Pag. 86

.RF
RECESSED FRAME

·10188 OHIO | RF
Pag. 400

.TR
TRIMLESS

·10188 OHIO | TR
Pag. 588



OHIO	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10188	**.35**	●	**.OP .MP**	**.ST**	**.9**	**.27**	-	18	700	**.DA .PU .D1**	
							.30	2385				
							.40	2475				
	10188	**.45**	●	**.OP .MP**	**.ST**	**.9**	**.27**	4590	35	700	**.DA .PU .D1**	
							.30	4770				
							.40	4950				
	10188	**.65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	9180	71	700	**.DA .PU .D1**	
							.30	9540				
							.40	9900				
	10188	**.95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	16830	130	700	**.DA .PU .D1**	
							.30	17490				
							.40	18150				
	10188	**.125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	27540	212	700	**.DA .PU .D1**	
							.30	28620				
							.40	29700				

Reference order | 10188.XX.TR.XX.XX.ST.9.XX.XX

.TR

TRIMLESS

● Select finishes

.WH-WH .BK-BK .GC-GC .BM-BM .BS-BS .BC-BC .CR-CR .CB-CB .GY-GY .MG-MG .VC-VC .YM-YM

OHIO

REF 10188.TR

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED

TR mounting KIT

PROFILE

FINISHES

● COLORS

DIMENSIONS

⬟ SIZES mm.

343x343 | 443x443 | 643x643 | 943x943 | 1243x1243

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

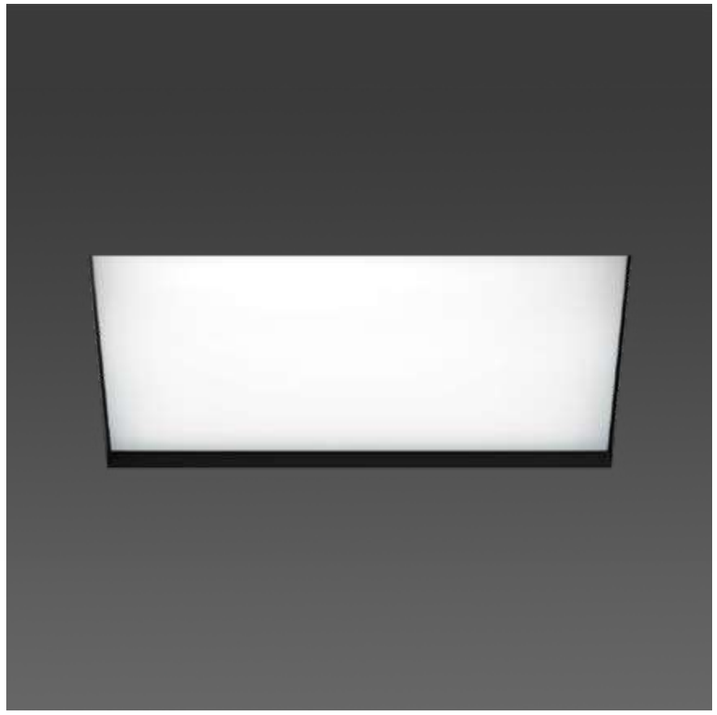

ON DEMAND

Special Color Temperature
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

.TR

TRIMLESS

INSTALLATIONS

OHIO
SQ

REF 10204.TR

.RF
RECESSED FRAME

·10204 OHIO SQ | RF
Pag. 404

.TR
TRIMLESS

·10204 OHIO SQ | TR
Pag. 592

OHIO SQ	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10204	.35	●	.OP .MP	.ST	.9	.27	2295	18	500	.DA .PU .D1	
							.30	2385				
							.40	2475				
	10204	.45	●	.OP .MP	.ST	.9	.27	4590	35	500	.DA .PU .D1	
							.30	4770				
							.40	4950				
	10204	.65	●	.OP .MP	.ST	.9	.27	9180	71	500	.DA .PU .D1	
							.30	9540				
							.40	9900				
	10204	.95	●	.OP .MP	.ST	.9	.27	18360	142	500	.DA .PU .D1	
							.30	19080				
							.40	19800				
	10204	.125	●	.OP .MP	.ST	.9	.27	30600	236	500	.DA .PU .D1	
							.30	31800				
							.40	33000				

Reference order | 10204.XX.TR.XX.XX.ST.9.XX.XX

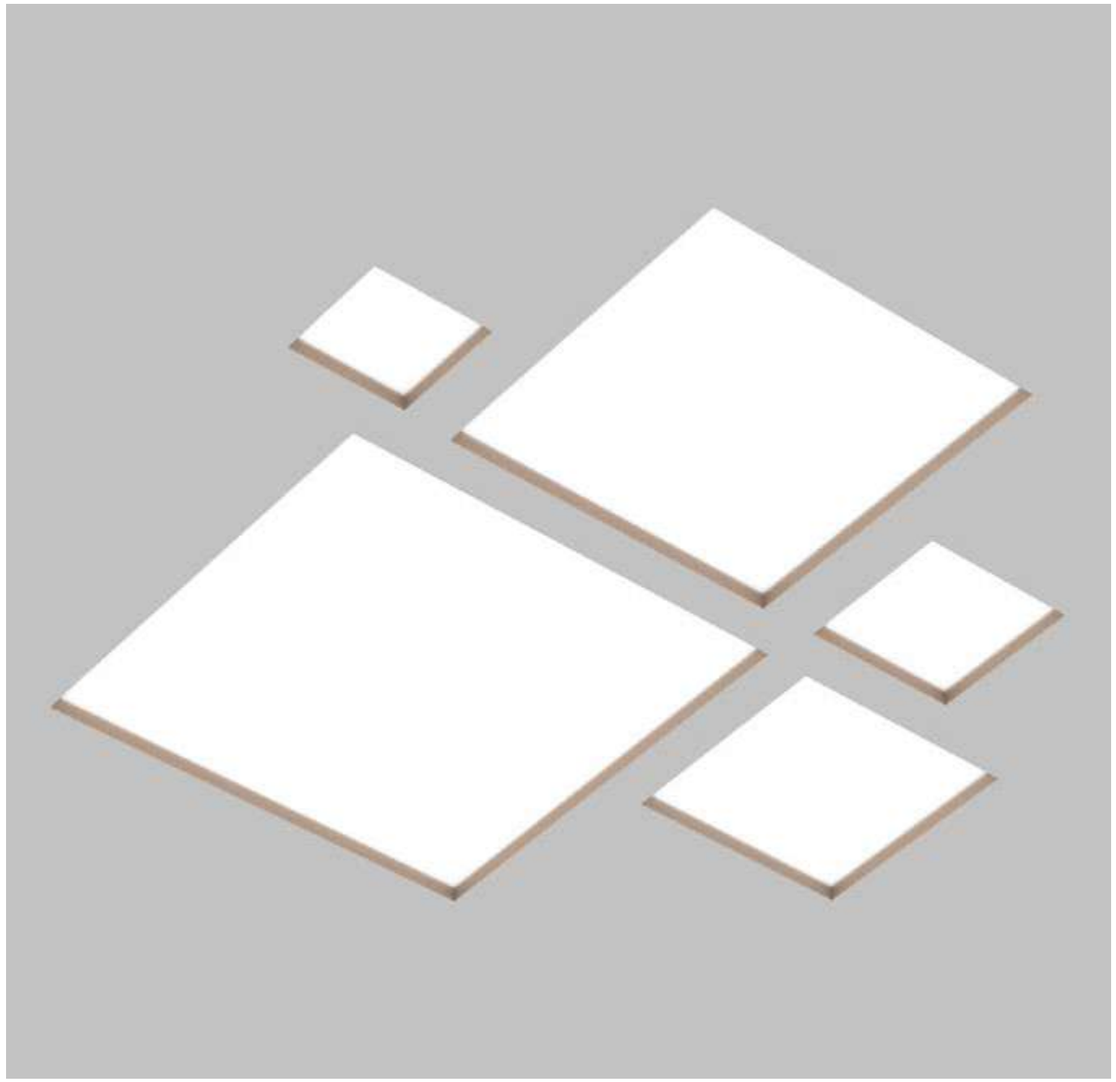

TRIMLESS

.TR

● Select finishes

OHIO SQ

REF 10204.TR

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED

TR mounting KIT

PROFILE



FINISHES

● EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ DIAMETERS mm.

450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Accesories are delivered separately (not installed in luminaire).

.TR

TRIMLESS

INSTALLATIONS

FLORIDA

REF 10190.TR

.PN
PENDANT

·10190 FLORIDA | PN
Pag. 90

.SR
SURFACE

·10190 FLORIDA | SR
Pag. 90

.RF
RECESSED FRAME

·10190 FLORIDA | RF
Pag. 408

.TR
TRIMLESS

·10190 FLORIDA | TR
Pag. 596

FLORIDA	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10190	**.45**	●	**.OP .MP**	**.ST**	**.9**	**.27**	4510	45	700	**.DA .PU .D1**	
							.30	4900				
							.40	5000				
	10190	**.65**	●	**.OP .MP**	**.ST**	**.9**	**.27**	10824	109	700	**.DA .PU .D1**	
							.30	11760				
							.40	12000				
	10190	**.95**	●	**.OP .MP**	**.ST**	**.9**	**.27**	19844	200	700	**.DA .PU .D1**	
							.30	21560				
							.40	22000				
	10190	**.125**	●	**.OP .MP**	**.ST**	**.9**	**.27**	31570	318	700	**.DA .PU .D1**	
							.30	34300				
							.40	35000				

Reference order | 10190.XX.TR.XX.XX.ST.9.XX.XX

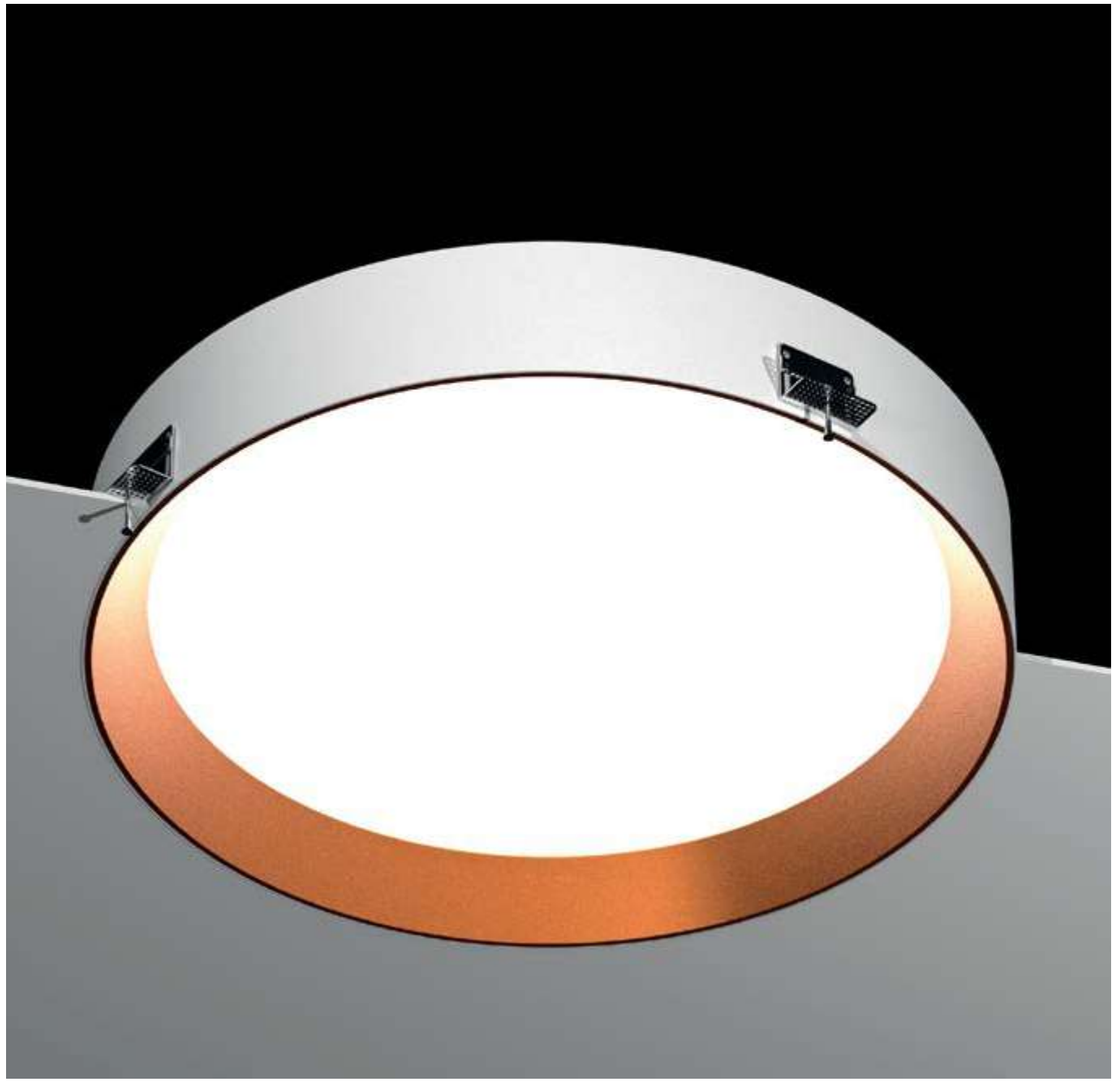

.TR

TRIMLESS

- Select finishes

FLORIDA

REF 10190.TR

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED



TR mounting KIT

PROFILE



FINISHES

● EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ SIZES mm.

350x350 | 450x450 | 650x650 | 950x950 | 1250x1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

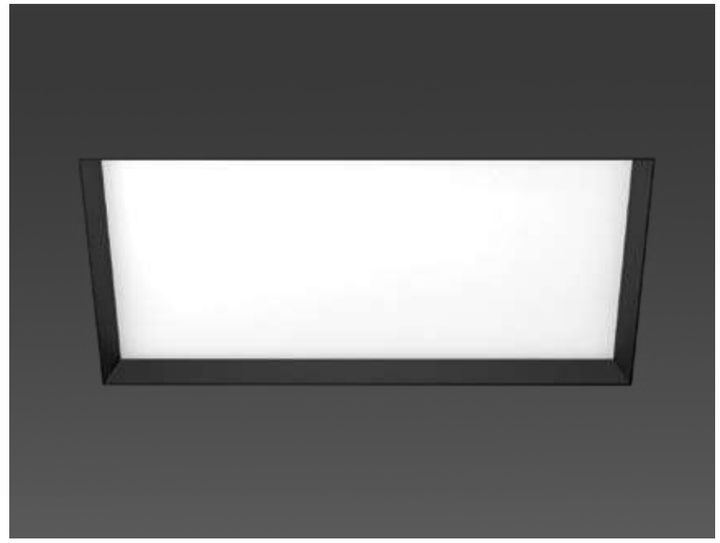

ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Accesories are delivered separately (not installed in luminaire).

FLORIDA SQ

REF 10191.TR

INSTALLATIONS

.PN
PENDANT

·10191 FLORIDA SQ | PN
Pag. 94

.SR
SURFACE

·10191 FLORIDA SQ | SR
Pag. 94

.RF
RECESSED FRAME

·10191 FLORIDA SQ | RF
Pag. 412

.TR
TRIMLESS

·10191 FLORIDA SQ | TR
Pag. 600

FLORIDA SQ	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10191	.35	●	.OP .MP	.ST	.9	.27	2706	27	700	.DA .PU .D1	
							.30	2940				
							.40	3000				
	10191	.45	●	.OP .MP	.ST	.9	.27	5412	55	700	.DA .PU .D1	
							.30	5880				
							.40	6000				
	10191	.65	●	.OP .MP	.ST	.9	.27	10824	109	700	.DA .PU .D1	
							.30	11760				
							.40	12000				
	10191	.95	●	.OP .MP	.ST	.9	.27	21648	218	700	.DA .PU .D1	
							.30	23520				
							.40	24000				
	10191	.125	●	.OP .MP	.ST	.9	.27	36080	364	700	.DA .PU .D1	
							.30	39200				
							.40	40000				

Reference order | 10191.XX.TR.XX.XX.ST.9.XX.XX

.TR

TRIMLESS

- Select finishes

FLORIDA SQ

REF 10191.TR

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED

TR mounting KIT

PROFILE



FINISHES

● COLORS

□

DIMENSIONS

⬟ DIAMETERS mm.

650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

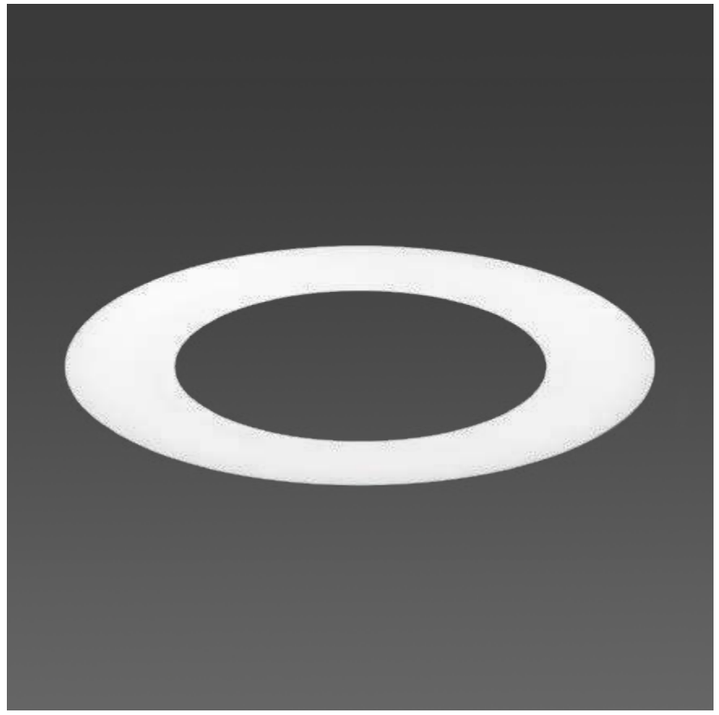

ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
CRI 80
Motion Detection
RGB
Wireless Control Options (Casambi)
Other Dimensions

* Accesories are delivered separately (not installed in luminaire).

ALBERTA

REF 10176.TR

INSTALLATIONS

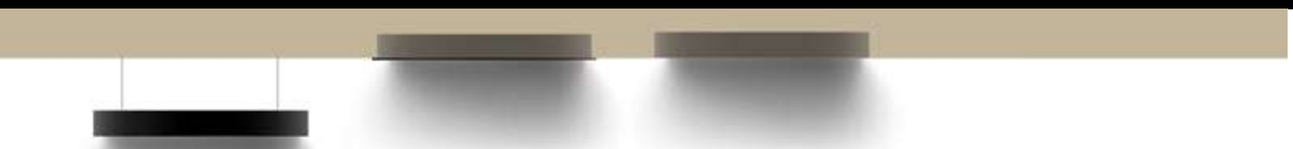

.PN
PENDANT

·10176 ALBERTA | PN
Pag. 132

.RF
RECESSED FRAME

·10176 ALBERTA | RF
Pag. 420

.TR
TRIMLESS

·10176 ALBERTA | TR
Pag. 604



ALBERTA	REF.	DIMEN-SION ⬟	FINISH	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10176	.65	●	.OP .MP	.ST	.9	.27	3060	24	500	.DA .PU .D1	
							.30	3180				
							.40	3300				
						.8	.TW *1	9500 - 9850	64	700	.DA	
					.HI	.9	.27	-	59	500	.DA .PU .D1	
							.30	6356				
							.40	6608				
	10176	.95	●	.OP .MP	.ST	.9	.27	6120	47	500	.DA .PU .D1	
							.30	6360				
							.40	6600				
						.8	.TW *1	15200 - 15760	102	700	.DA	
					.HI	.9	.27	-	94	500	.DA .PU .D1	
							.30	12712				
							.40	13216				
	10176	.125	●	.OP .MP	.ST	.9	.27	9180	71	500	.DA .PU .D1	
							.30	9540				
							.40	9900				
						.8	.TW *1	22800-23640	152	700	.DA	
					.HI	.9	.27	-	142	500	.DA .PU .D1	
							.30	19068				
							.40	19824				

Reference order | 10176.XX.TR.XX.XX.XX.X.XX.XX

- Select finishes

.WH-WH

ALBERTA

REF 10176.TR

PHOTOMETRY

OPAL

MICROPRISMATIC

INCLUDED

TR mounting KIT

PROFILE

*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700*mA.

LINES

TRIMLESS

A blank canvas

There are no limits Don't worry about lighting. Imagine the end result and use our Line profiles to make it happen. Few collections can be combined in so many ways to create so many looks and fulfil so many functions. It's the joker in the pack for designing unique spaces.

Un lienzo en blanco

Vía libre. No pensar en las luminarias. Pensar en el resultado final, y nuestra perfilería lineal se adaptará a ello. Pocas colecciones se prestan a tantas combinaciones, tanto estéticas como de funcionamiento, por ello es un comodín a la hora de diseñar espacios que requieren de un plus de singularidad.

FINISHES

● PROFILE COLORS

● EYE COLORS

DIMENSIONS

⬟ LENGTHS mm.

1m.

LIGHTING OPTIONS

■ DIFFUSERS

ACRYLIC

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

-

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

SOON

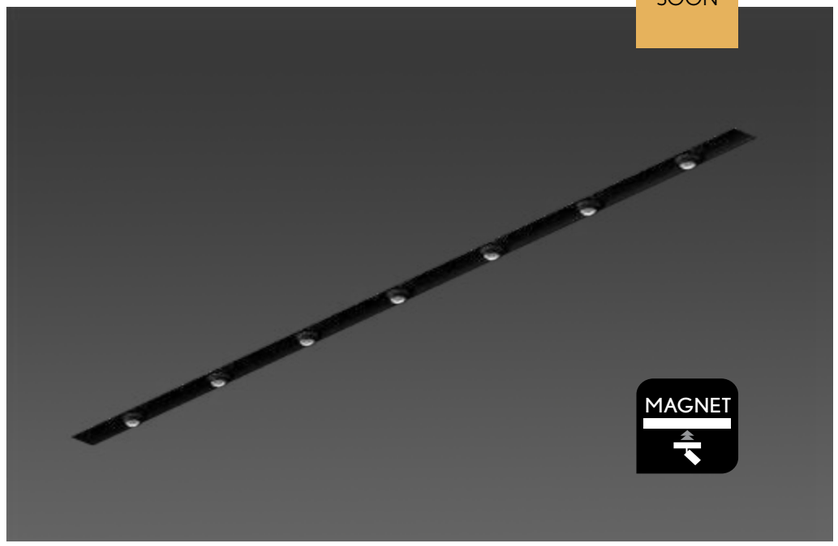

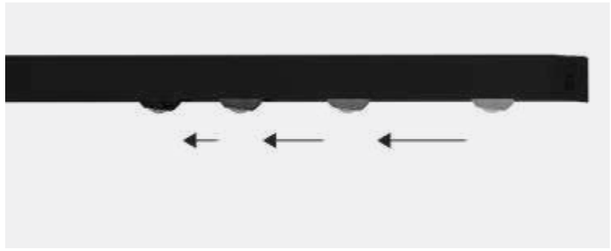

.TR

TRIMLESS

INSTALLATIONS

EYE

REF 210016.TR

.PN
PENDANT

·210016 EYE|PN
Pag. 158

.SR
SURFACE

·210016 EYE|SR
Pag. 158

.TR
TRIMLESS

·210016 EYE|TR
Pag. 610



EYE	REF.	DIMEN-SION ⬟	FINISH	SKETCH
	210016	.01	.BK-BK .WH-WH	

Reference order ⬟ ● 210016.XX.TR.XX

48V TRANSFORMER	DIMENSION ⬟	WATT
DR48	.01	75
	.02	120
	.03	200

Reference order ⬟ DR48.XX

EYE MODULE	REF.	DIMENSION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	LUMEN .27	LUMEN .30	LUMEN .40	WATT	VdC	DIMM ▼	SKETCH
	20210	.01	●	.AC	.ST	.9	419	474	510	5	48	-	

Reference order ⬟ ● ■ 20210.01.XX.AC.ST.9.XX

COMPONENTS

COVERT KIT	REF.	FINISH ●
	TF16	●

Reference order ● TF16.TR.XX

LINEAR JOINT + FLEXIBLE JOINT CONNECTOR	FINISH ●
	.BK-BK .WH-WH

Reference order ● UR16.XX

POWER FEEDER UNIT	FINISH ●
	.BK-BK .WH-WH

● ACC210016.CA.XX

Total length = Profile length + 2x3mm (Cover kit)
(Total length + 2mm) x 75mm
75mm

● Select profile finishes

.WH-WH .BK-BK

● Select eye module finishes

.WH-WH .BK-BK .GC-GC

EYE

REF 210016.TR

PHOTOMETRY

OPAL

PROFILE

12,5mm Standard Ceiling



MINI PATRICIA
450001

MINI PATRICIA
450001

MINI PATRICIA ROUND LENSES
450005

MINI PATRICIA FLAT
450007

MINI PATRICIA LOL
450002

MINI MOTION LENSES
450004

MINI LENSES
450005

MINI PATRICIA ZOOM
450003

MINI LED MODULES
450006

ALARIK MINI

new

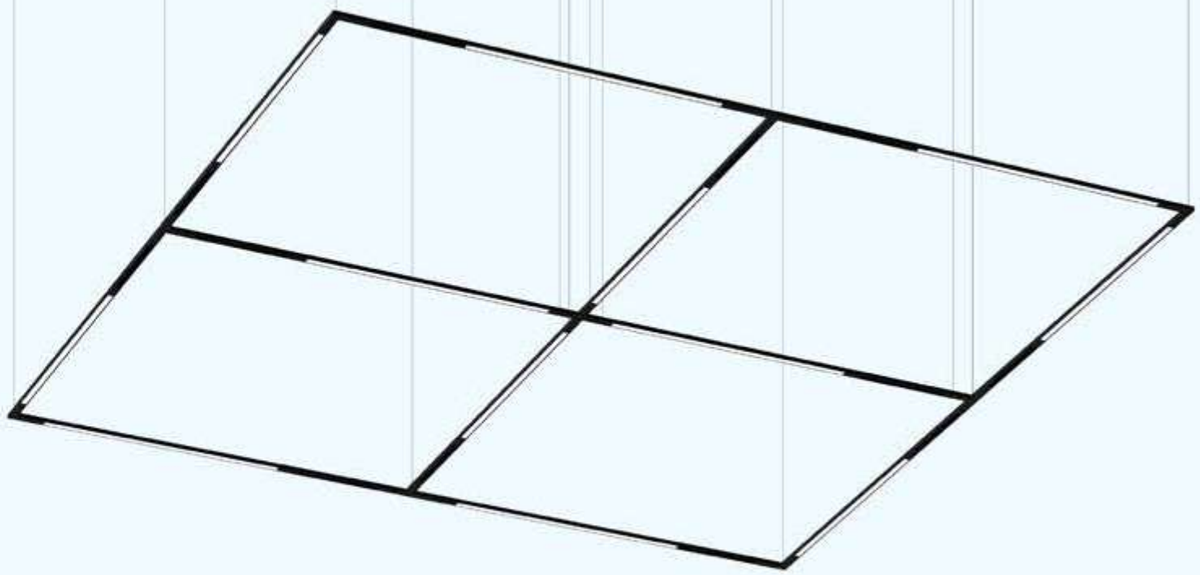

FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS

PER METER

COMPONENTS

MINI PATRICIA
MINI PATRICIA LOL
MINI PATRICIA ZOOM
MINI MOTION LENSES
MINI LENSES
MINI LED MODULES
MINI PATRICIA FLAT
MINI PATRICIA ROUND LENSES

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

-

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

new

MAGNET

ON DEMAND
Custom dimensions

.TR

TRIMLESS

INSTALLATIONS



ALARIK
MINI

REF 210006.TR

.PN
PENDANT

·210006 ALARIK MINI | PN
Pag. 164

.SR
SURFACE

·210006 ALARIK MINI | SR
Pag. 164

.TR
TRIMLESS

·210006 ALARIK MINI | TR
Pag. 616



ALARIK MINI		DIMEN-SION ⬟	FINISH ●	SKETCH
	210006	.01 1m	●	

Reference order | 210006.XX.TR.XX

48V TRANSFORMER	DIMENSION ⬟	WATT
DR48	.01	75
	.02	120
	.03	200

Reference order | DR48.XX

POWER FEEDER	REF.	FINISH ●	SKETCH
	ACC210006.CA	.BK-BK .WH-WH	

Reference order | ACC210006.CA.XX

MINI PATRICIA	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450001	.01	●	.15 .38 .60	.ST	.9	.27	576	3	48	-	
							.30	607				
							.40	695				
	450001	.02	●	.15 .38 .60	.ST	.9	.27	1173	8	48	-	
							.30	1181				
							.40	1207				

Reference order | 450001.XX.XX.XX.ST.9.XX.XX

MINI PATRICIA LOL	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450002	.01	●	.36	.ST	.9	.27	576	6	48	-	
							.30	607				
							.40	695				

Reference order | 450002.01.XX.XX.ST.9.XX.XX

MINI PATRICIA ZOOM	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450003	.01	●	.15-40	.ST	.9	.27	576	6	48	-	
							.30	607				
							.40	695				

Reference order | 450003.01.XX.XX.ST.9.XX.XX

MINI PATRICIA FLAT	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450007	.01	●	.15 .30 .36	.ST	.9	.27	558	5	48	-	
							.30	560				
							.40	604				

Reference order | 450007.01.XX.XX.ST.9.XX.XX

MINI PATRICIA ROUND LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450008	.01	●	.30 .36 .60	.ST	.9	.27	558	9	48	-	
							.30	560				
							.40	604				

Reference order | 450008.01.XX.XX.ST.9.XX.XX

Total length = Profile length + 2x2mm (Cover kit).
(Total length + 2mm) x 30mm.
55mm.

.TR

TRIMLESS

- Select finishes

.WH-WH .BK-BK

ALUMINIUM PC · 0° · 0° · CRI ≥90 · IK08 · IP20 IP23 · LIFE 50000H · DIM OPTIONAL · 48V REMOTE · INDOOR · 220-240 V 50-60 Hz · CE

ALARIK MINI

REF 210006.TR

PHOTOMETRY

MINI PATRICIA

15º 24º 30º

MINI PATRICIA LOL

15º 24º 36º

MINI PATRICIA ZOOM

15º

MINI PATRICIA FLAT | LENSES

15º 30º 36º

MINI PATRICIA ROUND LENSES

30º 36º 60º

PROFILE

12,5mm Standard Ceiling



MINI LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450005	.01	●	.23 .28 .36	.ST	.9	.27	538	9	48	-	
							.30	571				
							.40	656				

Reference order | 450005.01.XX.XX.ST.9.XX.XX

MINI MOTION LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450004	.01	●	.23 .28 .36	.ST	.9	.27	547	9	48	-	
							.30	570				
							.40	634				

Reference order | 450004.01.XX.XX.ST.9.XX.XX

MINI LED MODULES	REF.	DIMEN-SION ⬟	FINISH ●	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	450006	.01	●	.OP	.ST	.9	.27	678	6	48	-	
							.30	688				
							.40	720				
	450006	.02	●	.OP	.ST	.9	.27	1256	12	48	-	
							.30	1274				
							.40	1340				
	450006	.03	●	.OP	.ST	.9	.27	1856	24	48	-	
							.30	1904				
							.40	2024				

Reference order | 450006.XX.XX.XX.ST.9.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF21	●

Reference order | TF21.TR.XX

JOINTS & CONNECTORS

LINEAR JOINT	ANGLE JOINT	CROSS JOINT	T-JOINT	WALL-CEILING JOINT		FINISH ●
						.BK .WH
UR21	UL21	UC21	UT21	UV21	ACC21006.UP	

Reference order | XX.XX

.TR

TRIMLESS

● Select finishes

.WH-WH .BK-BK

ALARIK
MINI

REF 210006.TR

PHOTOMETRY

MINI LENSES

23º 28º 60º

PHOTOMETRY

MINI LED MODULES



OPAL

PROFILE

12,5mm Standard Ceiling



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS

PER METER

COMPONENTS

SLIM PATRICIA
SLIM PATRICIA ZOOM
SLIM LED BALL
SLIM TUBE
SLIM WALL WASHER
SLIM LENSES
SLIM MOTION LENSES
SLIM LED MODULES

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

new

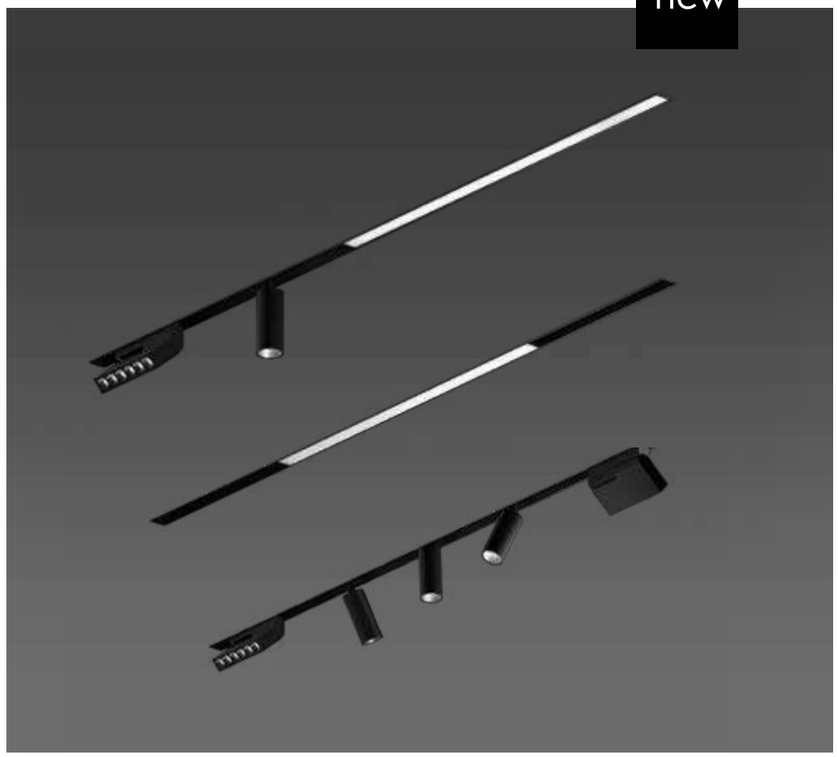

MAGNET

ON DEMAND
Custom dimensions

.TR

TRIMLESS

INSTALLATIONS

ALARIK
SLIM

REF 20224.TR

.PN
PENDANT

·20224 ALARIK SLIM | PN
Pag. 178

.SR
SURFACE

·20224 ALARIK SLIM | SR
Pag. 178

.RF
RECESSED FRAME

·20224 ALARIK SLIM | RF
Pag. 428

.TR
TRIMLESS

·20224 ALARIK SLIM | TR
Pag. 622

ALARIK SLIM	REF.	DIMEN-SION ⬟	FINISH ●	SKETCH
	20224	**.01** 1 mt.	●	

Reference order | 20224.XX.TR.XX

48V TRANSFORMER	DIMENSION ⬟	WATT
DR48	**.01**	75
	.02	120
	.03	200

Reference order | DR48.XX

INTEGRATED POWER *1	REF.	WATT
	10246.DR (404x43x22mm)	200W

Reference order | 10246.DR

SLIM PATRICIA	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K ▼	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11544	**.01**	●	**.15 .38 .60**	.ST	.9	**.27**	576	8	48	**.DA .D1**	
							.30	607				
							.40	695				
	11544	**.02**	●	**.15 .38 .60**	.ST	.9	**.27**	1173	15	48	**.DA .D1**	
							.30	1181				
							.40	1207				

Reference order | 11544.XX.XX.XX.ST.9.XX.XX

SLIM PATRICIA ZOOM	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K ▼	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11546	**.01**	●	**.15-36 .36-60**	.ST	.9	**.27**	2038	25	48	**.DA .D1**	
							.30	2254				
							.40	2320				

Reference order | 11546.01.XX.XX.ST.9.XX.XX

SLIM LED BALL	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K ▼	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11551	**.01**	●	**.37**	.ST	.9	**.27**	355	8	48	**.DA .D1**	
							.30	383				
							.40	396				

Reference order | 11551.01.XX.XX.ST.9.XX.XX

*1 When adding 10246.DR, driver will be integrated in the luminaire | Cuando se añada 10246.DR, el driver irá integrado en la luminaria.

SLIM LED TUBE 20	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K ▼	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11553	**.01**	●	**.20 .40**	.ST	.9	**.27**	174	3	48	**.DA .D1**	
							.30	187				
							.40	212				

Reference order | 11553.01.XX.XX.ST.9.XX.XX

SLIM LED TUBE 40	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K ▼	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11552	**.01**	●	**.20 .40**	.ST	.9	**.27**	954	14	48	**.DA .D1**	
							.30	991				
							.40	1067				

Reference order | 11552.01.XX.XX.ST.9.XX.XX

SLIM WALL WASHER	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K ▼	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11550	**.01**	**.BK-BK**	-	.ST	.9	**.27**	882	15	48	**.DA .D1**	
							.30	1013				
							.40	1107				

Reference order | 11550.01.XX.XX.ST.9.XX.XX

SLIM LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K ▼	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11548	**.01**	**.BK-BK**	**.15 .38**	.ST	.9	**.27**	660	8	48	**.DA .D1**	
							.30	750				
							.40	827				
	11548	**.02**	**.BK-BK**	**.15 .38**	.ST	.9	**.27**	1320	15	48	**.DA .D1**	
							.30	1511				
							.40	1654				

Reference order | 11548.XX.XX.XX.ST.9.XX.XX

TRIMLESS .TR

● Select finish

.WH-WH .BK-BK

ALARIK
SLIM
REF 20224.TR

PHOTOMETRY
SLIM PATRICIA

15º 36º 38º 60º

PHOTOMETRY
SLIM LED BALL SLIM WALL WASHER

37º

PHOTOMETRY
SLIM TUBE | SLIM LENSES

20º 40º

PROFILE
12,5mm Standard Ceiling



SLIM MOTION LENSES	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11547	**.01**	**.BK-BK**	**.15** **.38**	.ST	.9	**.27**	660	8	48	**.DA** **.D1**	
							.30	750				
							.40	827				

Reference order | 11547.01.XX.XX.ST.9.XX.XX

SLIM LED MODULES	REF.	DIMEN-SION ⬟	FINISH ●	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	VaC	DIMM ▼	SKETCH
	11549	**.01**	**.BK-BK**	**.OP**	.ST	.9	**.27**	558	9	48	**.DA** **.D1**	
							.30	560				
							.40	604				
	11549	**.02**	**.BK-BK**	**.OP**	.ST	.9	**.27**	1115	18	48	**.DA** **.D1**	
							.30	1120				
							.40	1208				
	11549	**.03**	**.BK-BK**	**.OP**	.ST	.9	**.27**	1670	24	48	**.DA** **.D1**	
							.30	1680				
							.40	1812				

Reference order | 11549.XX.XX.XX.ST.9.XX.XX

Total length = Profile length + 2x3mm (Cover kit)

(Total length + 2mm) x 55mm

85mm

COMPONENTS

COVERT KIT	REF.	FINISH
	TF19	●

Reference order | TF19.TR.XX

JOINTS & CONNECTORS

LINEAR JOINT CONNECTOR	FINISH ●	ANGLE JOINT CONNECTOR	FINISH ●
	**.BK-BK**		**.BK-BK**

ACC20224.UR.XX ACC20224.UL.XX

POWER FEEDER UNIT	FINISH ●
	**.BK-BK**

ACC20224.CA.XX

LINEAR JOINT	ANGLE JOINT	WALL-CEILING JOINT
		
UR19	UC19	UW19

*Corners and wall-ceiling joints require miter cut since they do not have a joint. *Las esquinas y las figuras techo-pared requieren un corte a inglete ya que no tienen una unión.*

.TR

TRIMLESS

● Select finish

.WH-WH .BK-BK

ALARIK SLIM

REF 20224.TR

PHOTOMETRY

SLIM MOTIONLENSES

15º 38º

PHOTOMETRY

SLIM LED MODULES

OPAL

PROFILE

12,5mm Standard Ceiling



FINISHES

● COLORS

□ ■

DIMENSIONS

⬟ LENGTHS

PER METER

COMPONENTS

PATRICIA
LED MODULES
LENSES

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

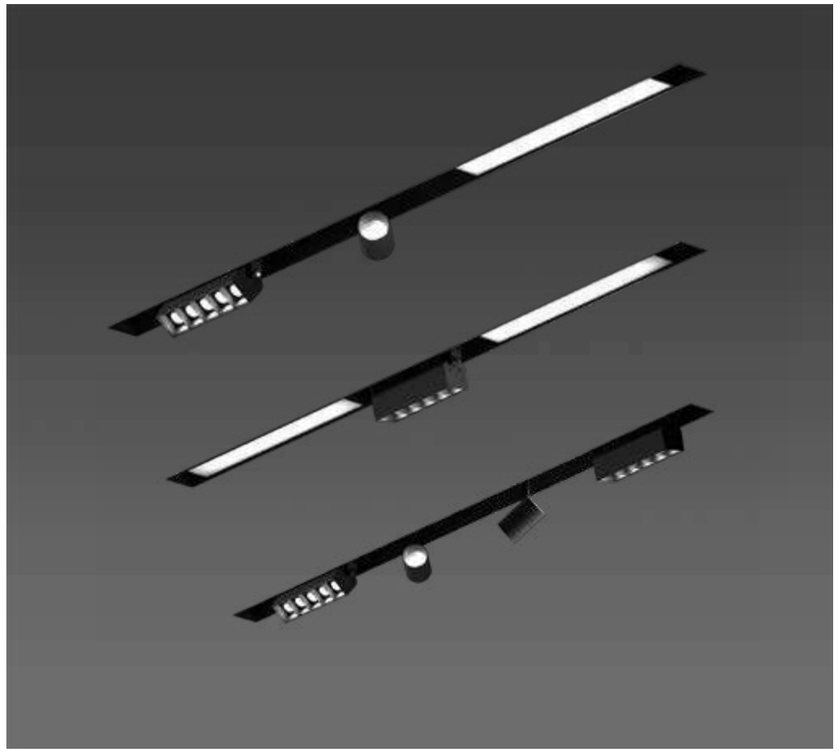

MAGNET

ON DEMAND

Custom dimensions

INSTALLATIONS

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06 | IP20 IP23 | LIFE 50000H | DIM OPTIONAL | | INTEGRATED | INDOOR | | | 220-240 V 50-60 Hz | CE

ALARIK

REF 10225.TR

.PN
PENDANT

·10225 ALARIK | PN
Pag. 190

.SR
SURFACE

·10225 ALARIK | SR
Pag. 190

.TR
TRIMLESS

·10225 ALARIK | TR
Pag. 628



ALARIK	REF.	DIMEN-SION ⬟	FINISH ●	SKETCH
	10225	**.01** 1m	●	

48V TRANSFORMER	DIMENSION ⬟	WATT
DR48	**.01**	75
	.02	120
	.03	200

Reference order | 10225.XX.TR.XX (⬟ ●)

Reference order | DR48.XX (⬟)

PATRICIA S	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	20146	**.01**	●	**.15** **.24** **.38**	.ST	.9	**.27**	576	8	48	**.DA**	
							.30	607				
							.40	695				

Reference order | 20146.01.XX.XX.ST.9.XX.XX (⬟ ● ■ ▼)

PATRICIA M	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	20193	**.01**	●	**.15** **.24** **.38**	.ST	.9	**.27**	1173	13	48	**.DA**	
							.30	1181				
							.40	1207				

Reference order | 20193.01.XX.XX.ST.9.XX.XX (⬟ ● ■ ▼)

LED MODULES	REF.	DIMEN-SION ⬟	FINISH ●	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11542	**.01**	**.BK-BK**	**.OP** **.MP**	.ST	.9	**.27**	765	6	48	**.DA**	
							.30	795				
							.40	825				
	11542	**.02**	**.BK-BK**	**.OP** **.MP**	.ST	.9	**.27**	1530	12	48	**.DA**	
							.30	1590				
							.40	1650				
	11542	**.03**	**.BK-BK**	**.OP** **.MP**	.ST	.9	**.27**	2295	18	48	**.DA**	
							.30	2385				
							.40	2475				

Reference order | 11542.XX.XX.XX.ST.9.XX.XX (⬟ ● ■ ▼)

	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OP. ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11534	**.05F**	**.RD** **.SQ**	**.BK-BK**	**.20** **.40** **.60**	.ST	.9	**.27**	660	10	48	**.DA**	
								.30	750			
								.40	827			

LENSES	REF.	DIMEN-SION ⬟	SHAPE ◗	FINISH ●	OPTIC OP. ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	11534	**.05**	**.RD** **.SQ**	**.BK-BK**	**.20** **.40** **.60**	.ST	.9	**.27**	660	10	48	**.DA**	
								.30	750				
								.40	827				

ROUND .RD
26x29,3 mm
Int Ø14,5 - Ext. Ø23 mm

SQUARE .SQ
26x29,3 mm
Ø14,5 mm

Reference order | 11534.XX.XX.XX.XX.ST.9.XX.XX (◗ ⬟ ● ■ ▼)

Total length = Profile length + 10mm + 2x2mm (Cover kit)

(Total length + 2mm) x 85mm

115mm

● Select finish

.WH-WH .BK-BK

ALARIK

REF 10225.TR

PHOTOMETRY

PATRICIA

15º 24º 38º

PHOTOMETRY

LENSES

20º 40º 60º

PHOTOMETRY

LED MODULES

OPAL

PROFILE

12,5mm Standard Ceiling



COMPONENTS

COVERT KIT	REF.	FINISH
	TF18	●

Reference order | TF18.TR.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CELING JOINT	FINISH
				X	●
UR18	UL18	UT18	UC18	X	

***** Each corner requires an additional driver to that of the luminaire. *Cada esquina requiere de un driver adicional al de la luminaria.*

Reference order | XX18.TR.XX

.TR

TRIMLESS

● Select finish

.WH-WH .BK-BK

ALARIK

REF 10225.TR

PROFILE

12,5mm Standard Ceiling



FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS

PER METER

COMPONENTS

LED MODULES
LENSES
MINI TUBE
MINI TUBE STICK

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

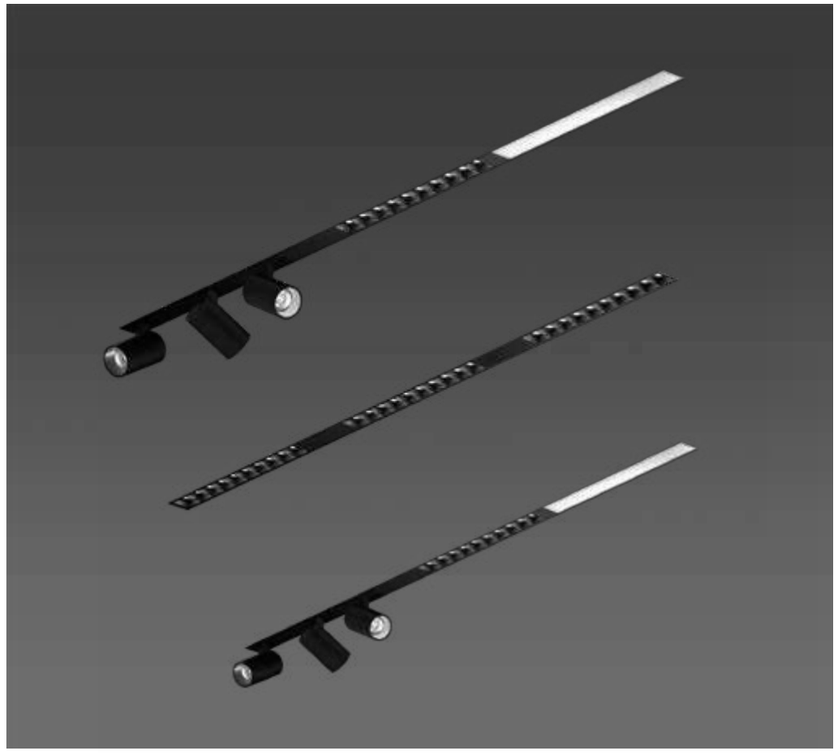

LUMINAIRE INCLUDES

Trimless mounting kit

ON DEMAND

Special Shapes
Emergency Lighting*
Motion Detection
Custom dimensions
Special RAL Color
Tunable White

* Delivered separately
(not installed in luminaire).

MODULIGHT

REF 10210.TR

INSTALLATIONS

.PN
PENDANT

·10210 MODULIGHT | PN
Pag. 196

.SR
SURFACE

·10210 MODULIGHT | SR
Pag. 196

.RF
RECESSED FRAME

·10210 MODULIGHT | RF
Pag. 434

.TR
TRIMLESS

·10210 MODULIGHT | TR
Pag. 634



MODULIGHT	REF.	DIMEN-SION ⬟	FINISH ●	SKETCH
	**10210**	**.01** 1m	●	

Reference order | 10210.XX.TR.XX

DRIVER	DIMENSION*1 ⬟		DIMM ▼
DR10210	**.01**	0 - 15 W	**.DA .PU .D1**
	.02	16 - 30 W	
	.03	31 - 65 W	
	.04	66 - 90 W	

Reference order | DR10210.XX.XX

MINI TUBE	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11526	**.01**	**.BK-BK .WH-WH**	**.15 .24 .38**	**.ST**	**.9**	**.27**	348	8	700	
							.30	362			
							.40	421			

Reference order | 11526.01.XX.XX.ST.9.XX

MINI TUBE STICK	REF.	DIMEN-SION ⬟	FINISH ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11538	**.01**	**.BK-BK .WH-WH**	**.15 .24 .38**	**.ST**	**.9**	**.27**	348	8	700	
							.30	362			
							.40	421			

Reference order | 11538.01.XX.XX.ST.9.XX

Modular system that requires a technical drawing

*1 Driver power must be at least 15% higher than the sum of the power of selected LED modules. *La potencia del driver deber ser por lo menos un 15% mayor que la suma de la potencia de los modulos LED elegidos.*

LENSES	REF.	DIMEN-SIONS ⬟	SHAPE ◗	FINISH ●	OPTIC OPTIONS ■	POW-ER	CRI	K	LUMEN	WATT	mA	SKETCH
	**11525**	**.01** 29mm.	**.RD .SQ**	●	**.20 .40 .60**	**.ST**	**.9**	**.27**	142	2	700	
								.30	161			
								.40	212			
	11525	**.03** 80mm.	**.RD .SQ**	●	**.20 .40 .60**	**..ST**	**.9**	**.27**	426	6	700	
								.30	483			
								.40	636			
	11525	**.05** 133mm.	**.RD .SQ**	●	**.20 .40 .60**	**.ST**	**.9**	**.27**	710	10	700	
								.30	805			
								.40	1060			
	11525	**.10** 263mm.	**.RD .SQ**	●	**.20 .40 .60**	**.ST**	**.9**	**.27**	1420	20	700	
								.30	1611			
								.40	2120			

Reference order | 11525.XX.XX.XX.XX.ST.9.XX

COVER	REF.	FINISH ●
	**ACC10210.01**	**.WH-WH .BK.BK**

Reference order | ACC10210.01.XX

ROUND .RD
26x29,3 mm
Int Ø14,5 - Ext. Ø23 mm

SQUARE .SQ
26x29,3 mm
Ø14,5 mm

● Select finish

MODULIGHT

REF 10210.TR

PHOTOMETRY

MINI TUBE

PHOTOMETRY

MINI LENSES

PROFILE

12,5mm Standard Ceiling



LED MODULES	REF.	DIMEN-SION ⬟	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11524	**.01** 281mm.	**.OP .MP**	**.HI**	**.9**	**.27**	953	12	700	
						.30	972			
						.40	1141			
	11524	**.02** 562mm.	**.OP .MP**	**.HI**	**.9**	**.27**	1906	24	700	
						.30	1944			
						.40	2282			
	11524	**.03** 843mm.	**.OP .MP**	**.HI**	**.9**	**.27**	2859	36	700	
						.30	2916			
						.40	3423			
	11524	**.04** 1124mm.	**.OP .MP**	**.HI**	**.9**	**.27**	3812	48	700	
						.30	3888			
						.40	4564			
	11524	**.05** 1405mm.	**.OP .MP**	**.HI**	**.9**	**.27**	4765	60	700	
						.30	4860			
						.40	5705			
	11524	**.06** 1686mm.	**.OP .MP**	**.HI**	**.9**	**.27**	5718	72	700	
						.30	5832			
						.40	6846			



Reference order | 11524.XX.XX.HI.9.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF23	●

Reference order | TF23.TR.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
		X	**X**		●
UR23	**UL23**	**X**	**X**	**UV23**	

Reference order | XX23.TR.XX

● Select finish

MODULIGHT

REF 10210.TR

PHOTOMETRY

LED MODULES



OPAL | MICROPRISMATIC

PROFILE

12,5mm Standard Ceiling



FINISHES

● COLORS

DIMENSIONS

⬟ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

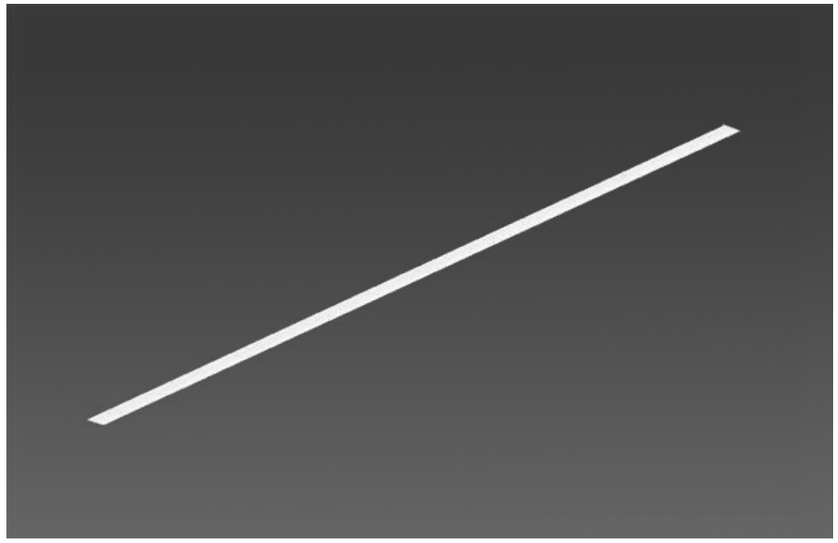



ON DEMAND

Emergency Lighting*
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

ALBA
MINI

REF 10211.TR

.PN
PENDANT

·10211 ALBA MINI | PN
Pag. 226

.SR
SURFACE

·10211 ALBA MINI | SR
Pag. 226

.RF
RECESSED FRAME

·10211 ALBA MINI | RF
Pag. 440

.TR
TRIMLESS

·10211 ALBA MINI | TR
Pag. 640



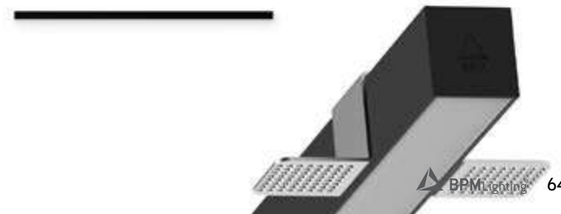

REF.	PROFILE LENGTH ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
10211	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	
	.05	1405					3825	3975	4125	9500-9850	30	64	
	.06	1686					4590	4770	4950	11400-11820	35	76	
	.07	1967					5355	5565	5775	13300-13790	41	89	
	.08	2248					6120	6360	6600	15200-15760	47	102	

REF.	PROFILE LENGTH ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
10211	.03	843	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1124					6120	6356	6608	47	
	.05	1405					7650	7945	8260	59	
	.06	1686					9180	9534	9912	71	
	.07	1967					10710	11123	11564	83	
	.08	2248					12240	12712	13216	94	

Reference order | 10211.XX.TR.XX.XX.XX.X.XX.XX

Total length = Profile length + 25mm + 2x2mm (Cover kit)

+ Linear Joint Total length = Profile length + 25mm + [2x2mm (Cover kit)] + [Nº of UR03 x 8]

Joints, other than Linear joint, require a technical drawing

(Total length + 2mm) x 35mm

70mm

COMPONENTS

COVERT KIT	REF.	FINISH
	TF03 2x2mm.	●

Reference order | TF03.TR.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
					●
UR03	UL03	UT03	UC03	UV03	

Reference order | XX03.TR.XX

● Select finish

ALBA MINI

REF 10211.TR

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED



TR INSTALATION KIT

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700mA.*

*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

FINISHES

● COLORS

DIMENSIONS

⬟ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

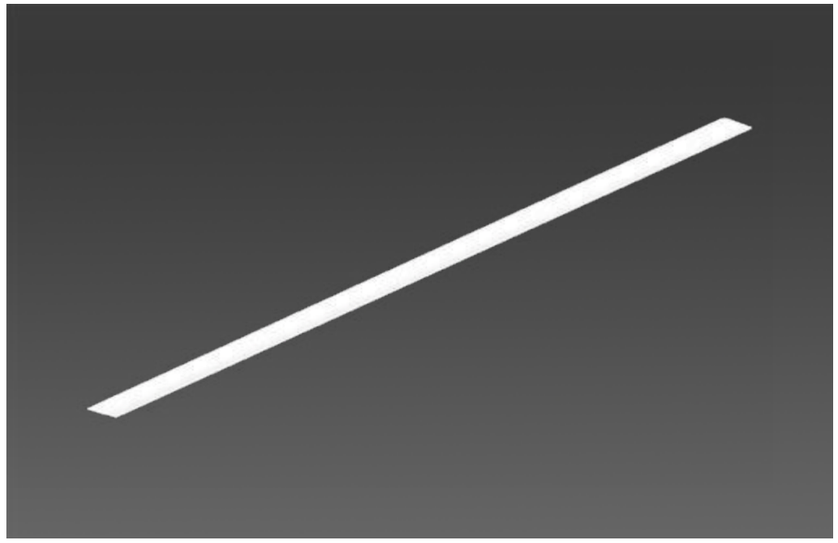



ON DEMAND

Emergency Lighting*
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

ALBA

REF 10160.TR

.PN
PENDANT

·10160 ALBA | PN
Pag. 230

.WS
WALL SURFACE

·10160 ALBA | WS
Pag. 786

.TK
TRACK

·10160 ALBA | TK
Pag. 760

.SR
SURFACE

·10160 ALBA | SR
Pag. 230

.RF
RECESSED FRAME

·10160 ALBA | RF
Pag. 444

.TR
TRIMLESS

·10160 ALBA | TR
Pag. 644



REF.	PROFILE LENGTH ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
10160	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	5700-8520	18	38	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-11360	24	51	
	.05	1405					3825	3975	4125	9500-14200	30	64	
	.06	1686					4590	4770	4950	11400-17040	35	76	
	.07	1967					5355	5565	5775	13300-19880	41	89	
	.08	2248					6120	6360	6600	15200-22720	47	102	

REF.	PROFILE LENGTH ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
10160	.03	843	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1124					6120	6356	6608	47	
	.05	1405					7650	7945	8260	59	
	.06	1686					9180	9534	9912	71	
	.07	1967					10710	11123	11564	83	
	.08	2248					12240	12712	13216	94	

Reference order | 10160.XX.TR.XX.XX.XX.X.XX.XX

Total length = Profile length + 10mm + 2x2mm (Cover kit)
(Total length + 2mm) x 65mm
100mm

● Select finish

COMPONENTS

COVER KIT	REF.	FINISH
	TF02 2x2mm.	●

Reference order | TF02.TR.XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
					●
UR02	UA02	UT02	UX02	UV02	

Joints, other than Linear joint, require a technical drawing

Reference order | XX02.TR.XX

ALBA

REF 10160.TR

PHOTOMETRY



OPAL MICROPRISMATIC

PROFILE

12,5mm Standard Ceiling



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700mA.*
*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

FINISHES

● EXTERNAL COLOR

INTERNAL COLOR

⬟ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

TRANSPARENT

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

ASYMETRIC DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

new

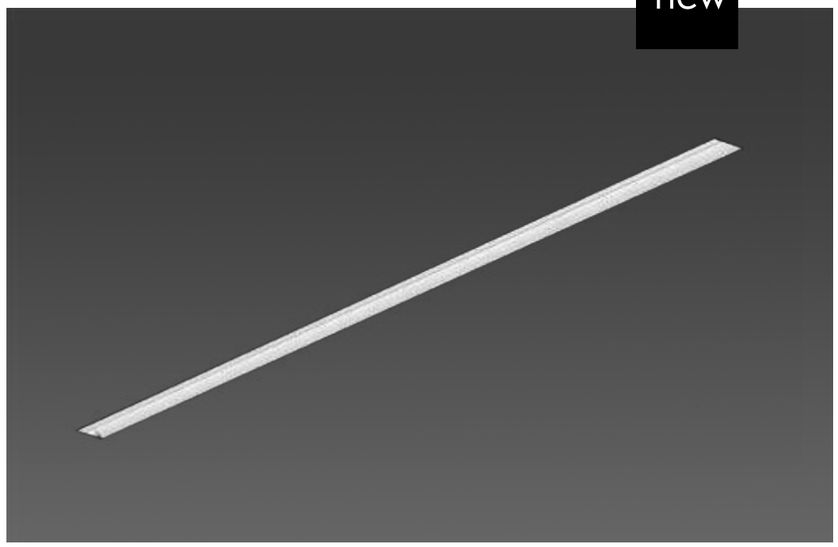



ON DEMAND

Emergency Lighting*
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

.TR

TRIMLESS

INSTALLATIONS

ALBA
ASIMETRIC

REF 210009.TR

.PN
PENDANT

·210009 ALBA ASIMETRIC
| PN - Pag. 242

.WS
WALL SURFACE

·210009 ALABA ASIMETRIC
| WS - Pag. 794

.SR
SURFACE

·210009 ALBA ASIMETRIC
| SR - Pag. 242

.RF
RECESSED FRAME

·210009 ALBA ASIMETRIC
| RF - Pag. 448

.TR
TRIMLESS

·210009 ALBA ASIMETRIC
| TR - Pag. 648



REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
210009	.03	843	●	.TP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	
	.05	1405					3825	3975	4125	9500-9850	30	64	
	.06	1686					4590	4770	4950	11400-11820	35	76	
	.07	1967					5355	5565	5775	13300-13790	41	89	
	.08	2248					6120	6360	6600	15200-15760	47	102	

REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
210009	.03	843	●	.TP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1124					6120	6356	6608	47	
	.05	1405					7650	7945	8260	59	
	.06	1686					9180	9534	9912	71	
	.07	1967					10710	11123	11564	83	
	.08	2248					12240	12712	13216	94	

Reference order | 210009.XX.TR.XX.XX.XX.X.XX.XX

Total length = Profile length + 10mm + 2x2mm (Cover kit)
(Total length + 2mm) x 65mm
100mm

COMPONENTS

COVERT KIT	REF.	FINISH
	TF06 2x2mm.	●

Reference order | TF06.TR.XX

JOINTS

LINEAR JOINT
UR06

● Select finish



ALBA
ASIMETRIC
REF 210009.TR

PHOTOMETRY

TRANSPARENT PC

PROFILE

12,5mm Standard Ceiling



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700mA.*
*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

FINISHES

● COLORS

DIMENSIONS

⬟ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

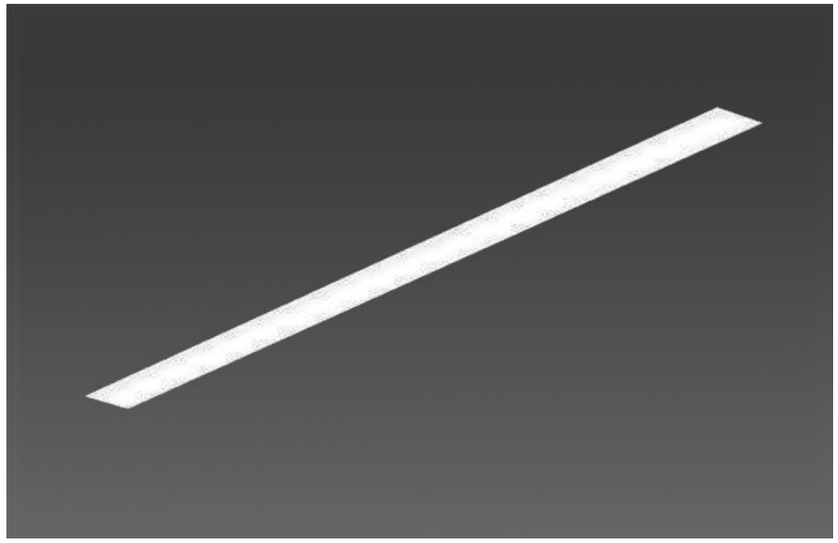



ON DEMAND

Emergency Lighting*
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

.TR

TRIMLESS

INSTALLATIONS

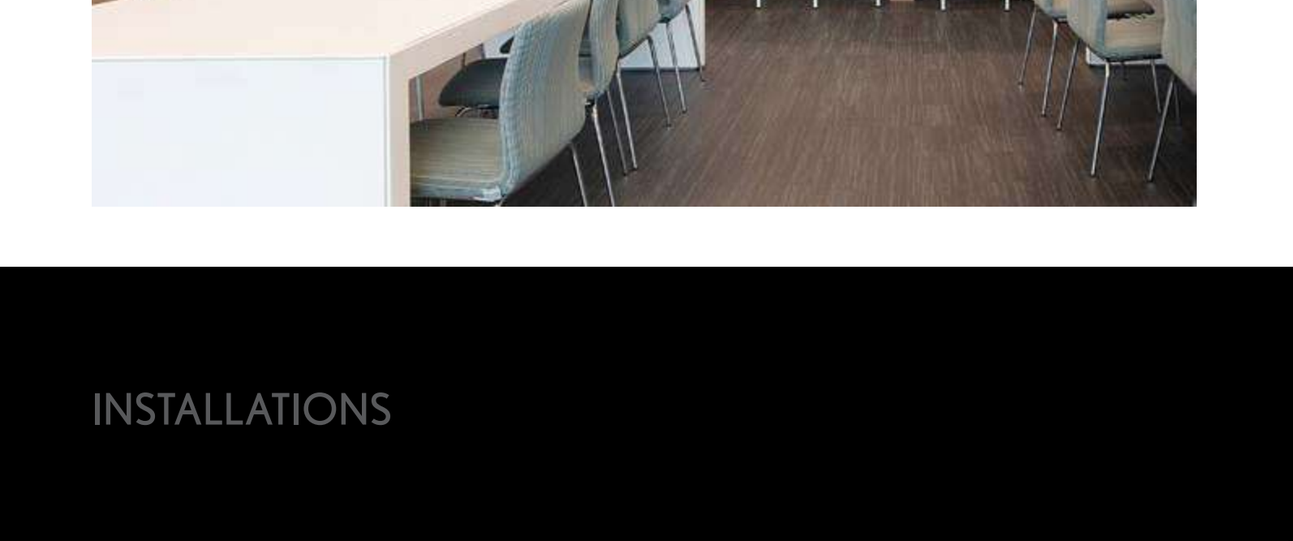

ALBA
PLUS

REF 10178.TR

.PN
PENDANT

·10178 ALBA PLUS | PN
Pag. 246

.TK
TRACK

·10178 ALBA PLUS | TK
Pag. 764

.SR
SURFACE

·10178 ALBA PLUS | SR
Pag. 246

.RF
RECESSED FRAME

·10178 ALBA PLUS | RF
Pag. 452

.TR
TRIMLESS

·10178 ALBA PLUS | TR
Pag. 652



REF.	PROFILE LENGTH ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
10178	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	5700-8520	18	38	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-11360	24	51	
	.05	1405					3825	3975	4125	9500-14200	30	64	
	.06	1686					4590	4770	4950	11400-17040	35	76	
	.07	1967					5355	5565	5775	13300-19880	41	89	
	.08	2248					6120	6360	6600	15200-22720	47	102	

REF.	PROFILE LENGTH ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
10178	.03	843	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1124					6120	6356	6608	47	
	.05	1405					7650	7945	8260	59	
	.06	1686					9180	9534	9912	71	
	.07	1967					10710	11123	11564	83	
	.08	2248					12240	12712	13216	94	

Reference order | 10178.XX.TR.XX.XX.XX.X.XX.XX

Total length = Profile length + 10mm + 2x1mm (Cover kit)
(Total length + 2mm) x 85mm
115mm

COMPONENTS

COVERT KIT	REF.	FINISH
	TF01 2x1mm.	●

Reference order | TF01.TR.XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
					●
UR01	UL01	UT01	UC01	UV01	

Joints, other than Linear joint, require a technical drawing

Reference order | XX01.TR.XX

● Select finish

ALBA PLUS

REF 10178.TR

PHOTOMETRY

OPAL MICROPRISMATIC

PROFILE

12,5mm Standard Ceiling



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700mA.*
*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

FINISHES

● EXTERNAL COLOR

INTERNAL COLOR

⬟ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

TRANSPARENT

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

ASYMETRIC DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

new

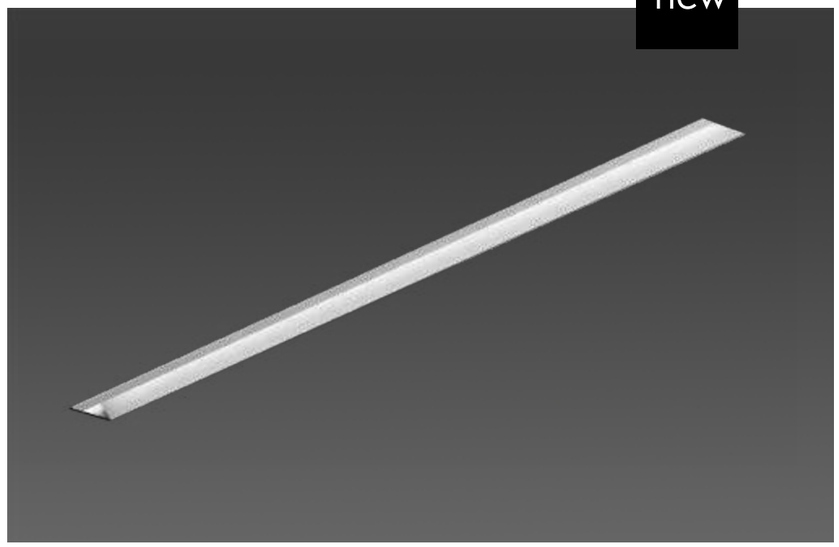

ON DEMAND

Emergency Lighting*
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80
Motion Detection

* Delivered separately
(not installed in luminaire).

.TR

TRIMLESS

INSTALLATIONS

ALBA
PLUS ASIMETRIC

REF 210008.TR

.PN
PENDANT

·210008 ALBA PLUS
ASIMETRIC | PN - Pag. 250

.SR
SURFACE

·210008 ALBA PLUS
ASIMETRIC | SR - Pag. 250

.RF
RECESSED FRAME

·210008 ALBA PLUS
ASIMETRIC | RF - Pag. 456

.TR
TRIMLESS

·210008 ALBA PLUS
ASIMETRIC | TR - Pag. 656



REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
210008	.03	843	●	.TP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	
	.05	1405					3825	3975	4125	9500-9850	30	64	
	.06	1686					4590	4770	4950	11400-11820	35	76	
	.07	1967					5355	5565	5775	13300-13790	41	89	
	.08	2248					6120	6360	6600	15200-15760	47	102	

REF.	PROFILE LENGTH ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
210008	.03	843	●	.TP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1124					6120	6356	6608	47	
	.05	1405					7650	7945	8260	59	
	.06	1686					9180	9534	9912	71	
	.07	1967					10710	11123	11564	83	
	.08	2248					12240	12712	13216	94	

Reference order | 210008.XX.TR.XX.XX.XX.X.XX.XX

Total length = Profile length + 10mm + 2x1mm (Cover kit)
(Total length + 2mm) x 85mm
100mm

COMPONENTS

COVERT KIT	REF.	FINISH
	TF05 2x1mm.	●

Reference order | TF05.TR.XX

JOINTS

LINEAR JOINT
UR05

● Select finish

ALBA
PLUS ASIMETRIC
REF 210008.TR

PHOTOMETRY

TRANSPARENT PC

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700mA.*
*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

FINISHES

● COLORS

DIMENSIONS

⬟ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

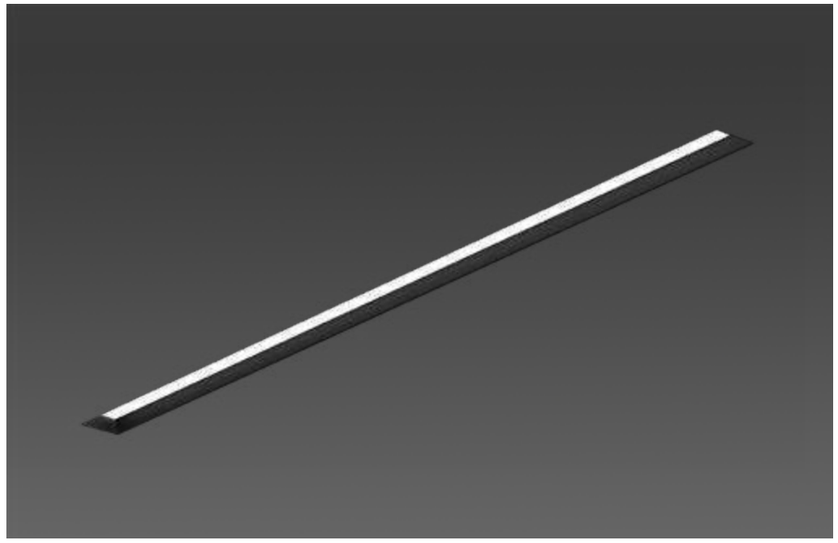

ON DEMAND

Emergency Lighting *
Motion Detection
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06 | IP20 IP43 | LIFE 50000H | DIM OPTIONAL | INTEGRATED | INDOOR | 220-240 V 50-60 Hz | CE

WING

REF 10200.TR

.PN
PENDANT

·10200 WING | PN
Pag. 262

.SR
SURFACE

·10200 WING | SR
Pag. 262

.RF
RECESSED FRAME

·10200 WING | RF
Pag. 464

.TR
TRIMLESS

·10200 WING | TR
Pag. 660



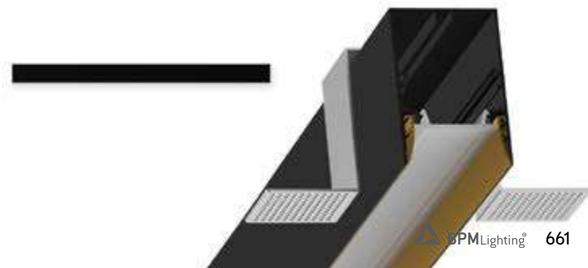

REF.	PROFILE LENGTH ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
10200	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	
	.05	1405					3825	3975	4125	9500-9850	30	64	
	.06	1686					4590	4770	4950	11400-11820	35	76	
	.07	1967					5355	5565	5775	13300-13790	41	89	
	.08	2248					6120	6360	6600	15200-15760	47	102	

REF.	PROFILE LENGTH ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
10200	.03	843	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1124					6120	6356	6608	47	
	.05	1405					7650	7945	8260	59	
	.06	1686					9180	9534	9912	71	
	.07	1967					10710	11123	11564	83	
	.08	2248					12240	12712	13216	94	

Reference order | 10200.XX.TR.XX.XX.XX.X.XX.XX

Total length = Profile length + 10mm + 2x2mm (Cover kit)
(Total length + 2mm) x 58mm
100mm

COVERT KIT	REF.	FINISH
	TF13 2x2mm.	●

Reference order | TF13.TR.XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

JOINTS

LINEAR JOINT
UR13

- Select finish

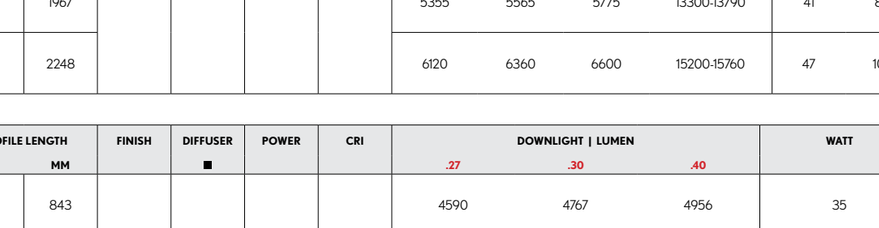

WING

REF 10200.TR

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED



TR INSTALATION KIT

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700mA.*
*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

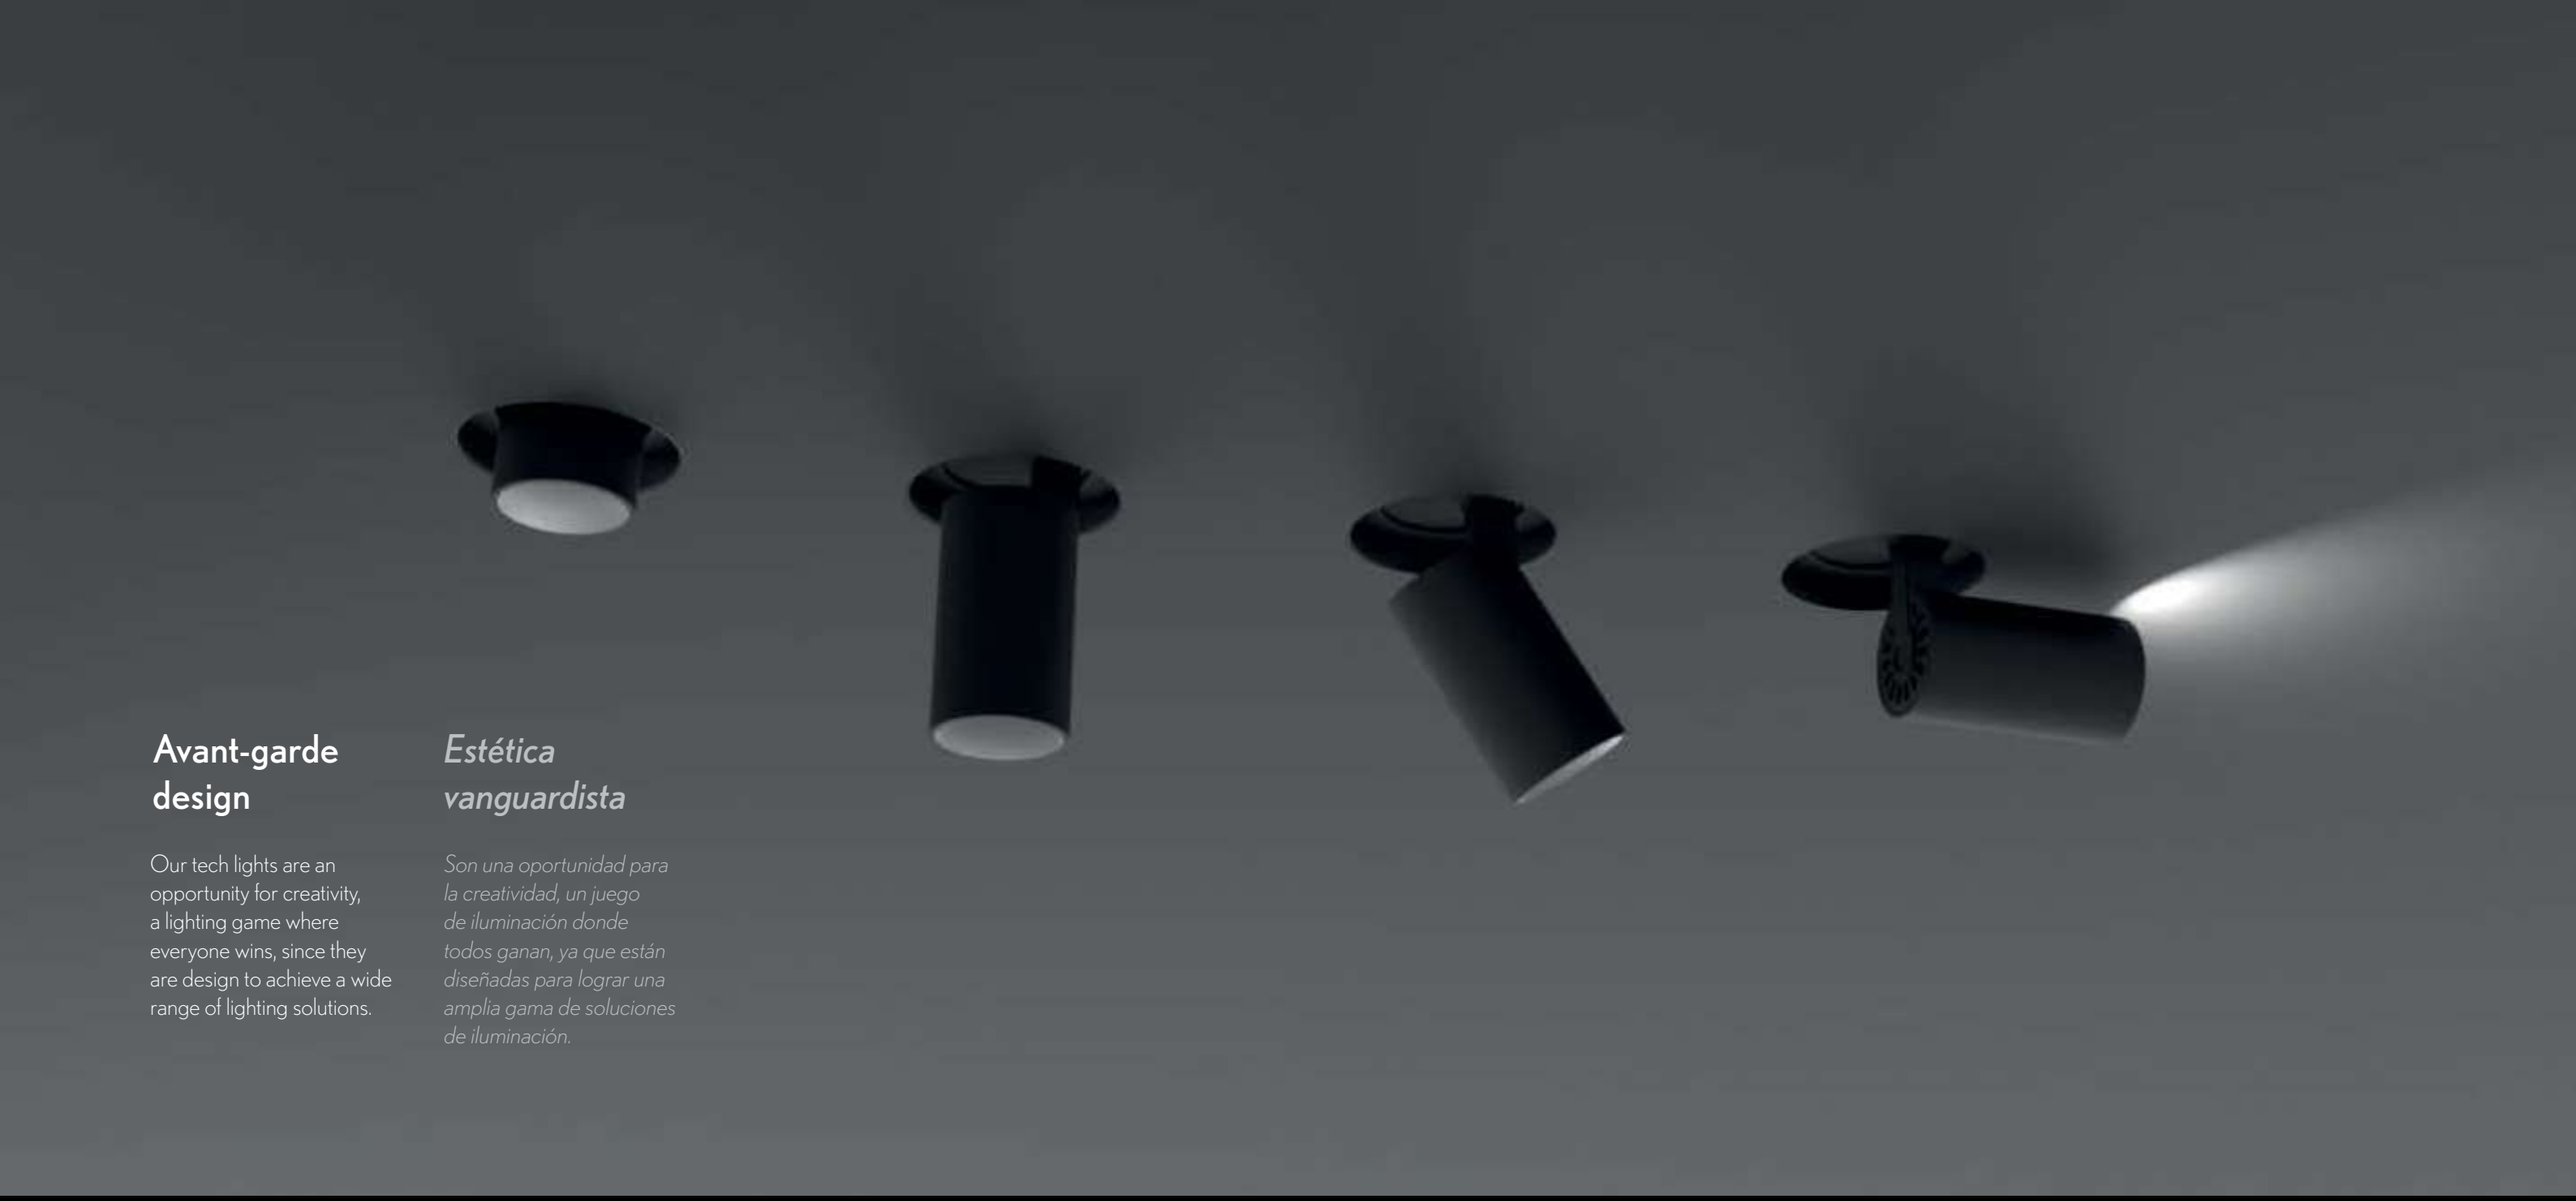

Avant-garde design

Our tech lights are an opportunity for creativity, a lighting game where everyone wins, since they are design to achieve a wide range of lighting solutions.

Estética vanguardista

Son una oportunidad para la creatividad, un juego de iluminación donde todos ganan, ya que están diseñadas para lograr una amplia gama de soluciones de iluminación.

TECH

TRIMLESS

LENT MODULAR	REF.	DIMEN-SIONS ⬟	SHAPE ◗	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	10216	**.01**	**.RO .SQ**	●	**LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	142	2	350	**.DA .PU .D1**	
									.30	161				
									.40	212				
	10216	**.03**	**.RO .SQ**	●	**LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	426	6	350	**.DA .PU .D1**	
									.30	483				
									.40	635				
	10216	**.05**	**.RO .SQ**	●	**LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	710	10	350	**.DA .PU .D1**	
									.30	805				
									.40	1060				
	10216	**.10**	**.RO .SQ**	●	**LED**	**.20 .40 .60**	**.ST**	**.9**	**.27**	1420	20	350	**.DA .PU .D1**	
									.30	1611				
									.40	2120				

Reference order | 10216.XX.TR.XX.XX.XX.ST.9.XX.XX

● Select finishes

ROUND .RO
26x29,3 mm
Int Ø14,5 - Ext. Ø23 mm

SQUARE .SQ
26x29,3 mm
Ø14,5 mm

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .03 | .05 | .10

LIGHTING OPTIONS

■ BEAM ANGLE

20º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White

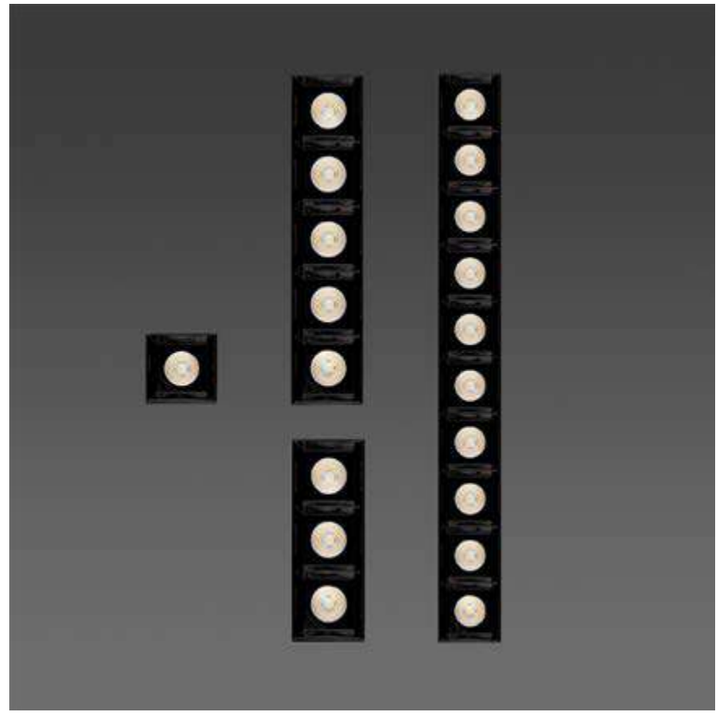

.TR

TRIMLESS

INSTALLATIONS

LENT MODULAR

REF 10216.TR

.RF
RECESSED FRAME

·10216 LENT MODULAR | RF
Pag. 472

.TR
TRIMLESS

·10216 LENT MODULAR | TR
Pag. 666

PHOTOMETRY

20º 40º 60º

SQUARE | SQ

ROUND | RD

SASSY	REF.	DIMENSIONS ⬟	FINISHES ●	SKETCH
	410002	**.01**	**.WH.WH** **.BK-BK**	

Reference order | 410002.01.TR.XX

SASSY LED	REF.	DIMEN-SIONS ⬟	FINISHES ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	120001	**.01**	**.BK-BK**	**.15** **.26** **.38** **.50**	**.ST**	**.9**	**.27**	599	10	250	**.DA** **.PU** **.D1**	
							.30	732				
							.40	775				
							.DW	627 to 14	6	350 to 14	**.DA**	
					.MD	**.9**	**.27**	696	12	300	**.DA** **.PU** **.D1**	
							.30	872				
							.40	893				
							.DW	713 to 14	7	420 to 14	**.DA**	
					.HI	**.9**	**.27**	778	15	350	**.DA** **.PU** **.D1**	
							.30	947				
							.40	1033				
							.DW	880 to 30	10	280 to 14	**.DA**	

Reference order | 120001.01.BK-BK.XX.XX.X.XX.XX

• FINISHES

EXTERNAL COLORS

INTERNAL COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

15º | 26º | 38º | 50º

POWER

STANDARD | MID | HI

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | DW

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White

new

IP 65

.TR

TRIMLESS

INSTALLATIONS

SASSY

REF 410002.TR

.RF
RECESSED FRAME

·410002 SASSY | RF
Pag. 476

.TR
TRIMLESS

·410002 SASSY | TR
Pag. 668

PHOTOMETRY

15º 26º 38º 50º

COMPONENTS

RING PART	FINISH ●
	.BK-BK .CH-CH .WH-WH .MS-MS .GF-GF
ACC410002.RR	

Reference order | ACC410002.RR.XX ●

RING PART			FINISH ●
			.BK-BK .WH-WH .BK-WH
ACC410002.TBR	ACC410002.OVR	ACC410002.CFR	

Reference order | ACC410002.XX.XX ●

ACCESORIES

OVAL FLOOD LENS	REF.	LENSE EFFECT ■	SKETCH
	ACC410002.OV	.03X60	6,4 Ø37,5
		.10X60	
		.10X40	
		.15X60	

Reference order | ACC410002.OV.XX ■

FLOOD LENS	REF.	LENSE EFFECT ■	SKETCH
	ACC410002	.ZSX1.3	6,4 Ø37,5
		.ZSX1.5	
		.ZSX2	
		.ZSX3	

Reference order | ACC410002.XX ■

HONEYCOMB
ACC410002.HC

● Select finish

SASSY

REF 410002.TR

SASSY SQ	REF.	DIMENSIONS ⬟	FINISHES ●	SKETCH
	410003	**.01**	●	

Reference order | 410003.01.TR.XX

SASSY LED	REF.	DIMEN-SIONS ⬟	FINISHES ●	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	120001	**.01**	**.BK-BK**	**.15 .26 .38 .50**	**.ST**	**.9**	**.27**	599	10	250	**.DA .PU .D1**	
							.30	732				
							.40	775				
							.DW	627 to 14	6	350 to 14	**.DA**	
					.MD	**.9**	**.27**	696	12	300	**.DA .PU .D1**	
							.30	872				
							.40	893				
							.DW	713 to 14	7	420 to 14	**.DA**	
					.HI	**.9**	**.27**	778	15	350	**.DA .PU .D1**	
							.30	947				
							.40	1033				
							.DW	880 to 30	10	280 to 14	**.DA**	

Reference order | 120001.01.BK-BK.XX.XX.X.XX.XX

• FINISHES

EXTERNAL COLORS

INTERNAL COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

15º | 26º | 38º | 50º

POWER

STANDARD | MID | HI

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | DW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White

.TR

TRIMLESS

INSTALLATIONS

.RF
RECESSED FRAME

·410003 SASSY SQ | RF
Pag. 482

.TR
TRIMLESS

·410003 SASSY SQ | TR
Pag. 672

SASSY
SQ

REF 410003.TR

PHOTOMETRY

15º 26º 38º 50º

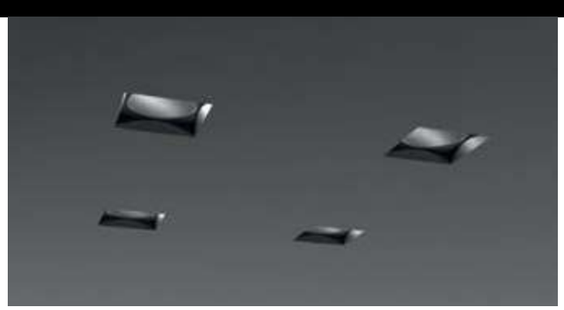

COMPONENTS

RING PART	FINISH ●
	.BK-BK .CH-CH .WH-WH .MS-MS .GF-GF
ACC410003.SQR	

Reference order | ACC410003.SQR.XX ●

ACCESORIES

OVAL FLOOD LENS	REF.	LENSE EFFECT ■	SKETCH
	ACC410003.OV	.03X60	6,4 Ø37,5
		.10X60	
		.10X40	
		.15X60	

FLOOD LENS	REF.	LENSE EFFECT ■	SKETCH
	ACC410003	.ZSX1.3	6,4 Ø37,5
		.ZSX1.5	
		.ZSX2	
		.ZSX3	

HONEYCOMB
ACC410003.HC

Reference order | ACC410003.OV.XX ■

Reference order | ACC410003.XX ■

● Select finish

SASSY
SQ

REF 410003.TR

MARTORELL	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	20115	**.01**	**.WH-WH .BK-BK**	**LED**	**.15 .24 .32**	**.ST**	**.9**	**.27**	175	3	700	**.DA .PU .D1**	
								.30	188				
								.40	199				
	20115	**.02**	●	**LED**	**.15 .24 .32**	**.ST**	**.9**	**.27**	470	8	700	**.DA .PU .D1**	
								.30	498				
								.40	515				
	20115	**.03**	●	**LED**	**.24 .32 .43**	**.ST**	**.9**	**.27**	1071	12	350	**.DA .PU .D1**	
								.30	1156				
								.40	1198				

Reference order | ⬟ ● ■ ▼ 20115.XX.TR.XX.XX.ST.9.XX.XX

● Select finishes

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

15º | 24º | 32º | 43º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm (.02, .03)
Tunable White (.02, .03)
Honey Comb (.03)
Wireless Control Options
Special RAL Color

MARTORELL

REF 20115.TR

INSTALLATIONS

.PN
PENDANT

·20115 MARTORELL | PN
Pag. 322

.TK
TRACKLIGHT

·20115 MARTORELL | TK
Pag. 744

.SR
SURFACE

·20115 MARTORELL | SR
Pag. 322

.RF
RECESSED FRAME

·20115 MARTORELL | RF
Pag. 494

.TR
TRIMLESS

·20115 MARTORELL | TR
Pag. 676

PHOTOMETRY

MARTORELL TÁRREGA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	20117	.01	●	LED	.25 .30	.ST	.9	.27	659	10	500	.DA .PU .D1	
								.30	691				
								.40	719				

Reference order ⬟ ● ■ ▼ 20117.01.TR.XX.XX.ST.9.XX.XX

MARTORELL TÁRREGA SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	20116	.01	●	LED	.25 .30	.ST	.9	.27	659	10	500	.DA .PU .D1	
								.30	691				
								.40	719				

Reference order ⬟ ● ■ ▼ 20116.01.TR.XX.XX.ST.9.XX.XX

● Select finishes

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

25º | 30º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White

.TR

TRIMLESS

INSTALLATIONS

MARTORELL
TÁRREGA | TÁRREGA SQ

REF 20117.TR | 20116.TR

.RF
RECESSED FRAME

·20117 TARREGA | RF ·20116 TARREGA SQ | RF
Pag. 498

.TR
TRIMLESS

·20117 TARREGA | TR ·20116 TARREGA SQ | TR
Pag. 678

PHOTOMETRY

25º 30º

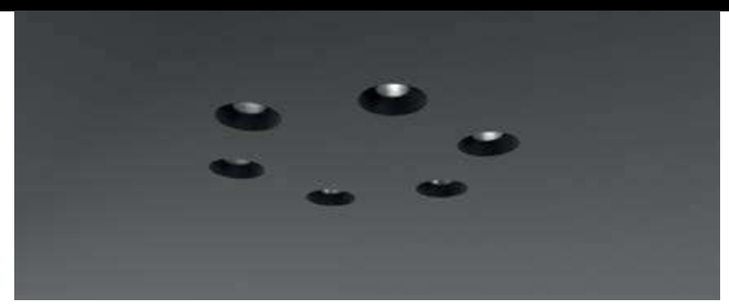

LUK FREIR	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	20018	**.01**	●	**LED**	**.40** **.60**	**.ST**	**.9**	**.27**	830	10	350	**.DA** **.PU** **.D1**	
								.30	845				
								.40	895				
	20018	**.02**	●	**LED**	**.40** **.60**	**.ST**	**.9**	**.27**	1271	18	500	**.DA** **.PU** **.D1**	
								.30	1616				
								.40	1682				

Reference order | 20018XX.TR.XX.XX.ST.9.XX.XX

LUK FREIR 2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	20019	**.01**	●	**LED**	**.40** **.60**	**.ST**	**.9**	**.27**	1660	21	350	**.DA** **.PU** **.D1**	
								.30	1690				
								.40	1790				
	20019	**.02**	●	**LED**	**.40** **.60**	**.ST**	**.9**	**.27**	1271	32	500	**.DA** **.PU** **.D1**	
								.30	1616				
								.40	1682				

● Select finishes

Reference order | 20019.XX.TR.XX.XX.ST.9.XX.XX

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

.TR

TRIMLESS

INSTALLATIONS

LUK
FREIR | FREIR 2

REF 20018.TR | REF 20019.TR

.SR
SURFACE

·20018 LUK FREIR ·20019 LUK FREIR 2 | SR
Pag. 344

.RF
RECESSED FRAME

·20018 LUK FREIR ·20019 LUK FREIR 2 | RF
Pag. 514

.TR
TRIMLESS

·20018 LUK FREIR ·20019 LUK FREIR 2 | TR
Pag. 680

PHOTOMETRY

40º 60º

CUBE SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	8201	.01	●	LED	.24 .40 .60	.ST	.9	.27	738	11	350	.DA .PU .D1	
								.30	862				
								.40	929				

Reference order ⬟ ● ■ ▼ 8201.01.TR.XX.XX.ST.9.XX.XX

CUBE SQ2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	8202	.01	●	LED	.24 .40 .60	.ST	.9	.27	1476	22	350	.DA .PU .D1	
								.30	1724				
								.40	1857				

Reference order ⬟ ● ■ ▼ 8202.01.TR.XX.XX.ST.9.XX.XX

CUBE SQ3	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	8203	.01	●	LED	.24 .40 .60	.ST	.9	.27	2214	33	350	.DA .PU .D1	
								.30	2586				
								.40	2786				

Reference order ⬟ ● ■ ▼ 8203.01.TR.XX.XX.ST.9.XX.XX

● Select external - internal finishes

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

24º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

INSTALLATIONS

CUBE
SQ | SQ2 | SQ3

REF 8201.TR | REF 8202.TR | REF 8203.TR

.SR
SURFACE

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | SR
Pag. 354

.RF
RECESSED FRAME

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | RF
Pag. 518

.TR
TRIMLESS

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | TR
Pag. 682

PHOTOMETRY

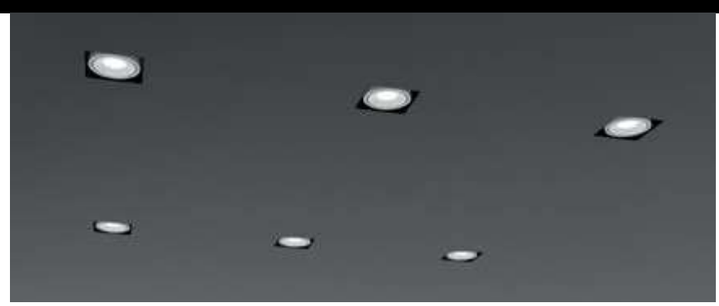

CUBE SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	8201	.02	●	LED	.24 .40 .60	.ST	.9	.27	1242	19	500	.DA .PU .D1	
								.30	1345				
								.40	1867				

Reference order ⬟ ● ■ ▼ 8201.02.TR.XX.XX.ST.9.XX.XX

CUBE SQ2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	8202	.02	●	LED	.24 .40 .60	.ST	.9	.27	2484	38	500	.DA .PU .D1	
								.30	2690				
								.40	3734				

Reference order ⬟ ● ■ ▼ 8202.02.TR.XX.XX.ST.9.XX.XX

CUBE SQ3	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	8203	.02	●	LED	.24 .40 .60	.ST	.9	.27	3726	58	500	.DA .PU .D1	
								.30	4035				
								.40	5601				

Reference order ⬟ ● ■ ▼ 8203.02.TR.XX.XX.ST.9.XX.XX

● Select external - internal finishes

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

24º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Wireless Control Options

.TR

TRIMLESS

INSTALLATIONS

CUBE
SQ | SQ2 | SQ3

REF 8201.TR | REF 8202.TR | REF 8203.TR

.SR
SURFACE

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | SR
Pag. 354

.RF
RECESSED FRAME

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | RF
Pag. 518

.TR
TRIMLESS

·8201 CUBE ·8202 CUBE 2 ·8203 CUBE 3 | TR
Pag. 682

PHOTOMETRY

The invisible star

El protagonista invisible

Style your spaces with even, harmonious light, where luminaries go virtually unnoticed. That's the secret of success of Structural / Crismosil. Say goodbye to wall lights, joins and superfluous items and let the light take centre stage.

Conseguir ambientes con una perfecta luz difusa, armoniosa, obviando la visibilidad de las luminarias. Así consigue Structural / Crismosil su objetivo. Se prescinde de apliques, juntas y todo lo superfluo para para dar todo el protagonismo a la luz.

STRUCTURAL

TRIMLESS

VITA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	30007	.01	●	LED	.15 .40	.ST	.9	.30	300	7	500	-	
								.40	559				

VITA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	30007	.02	●	LED	.25 .40	.ST	.9	.30	713	13	700	-	
								.40	809				

10 - 20 mm

* Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order ⬟ ● ■

30007.XX.TR.XX.XX.ST.9.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

15º | 25º | 40º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

-

▲ LIGHT DISTRIBUTION

DOWN

CRISMOSIL

.TR

TRIMLESS

• Select finishes

.WH-WH

VITA

REF 30007.TR

PHOTOMETRY

15º 25º 40º

VOLCANO	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10062	.01	●	GU5.3		GU5.3	-			8	-		295x295mm 90
				GU10	.GU	GU10							
				LED	.OP	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	Ø108 68 290x290
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	767				

VOLCANO	REF.	DIMEN-SIONS	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10062	.02	●	LED	.OP	.ST BPM3181	.9	.27	1538	16	500	.DA .PU .D1	335x335mm 90
								.30	1722				Ø170 105 330x330
								.40	1355				

VOLCANO	REF.	DIMEN-SIONS	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10062	.03 *	●	LED	.OP	.ST	.9	.27	3280	23	500	.DA .PU .D1	650x650mm 90
								.30	3480				
								.40	3640				Ø400 160 645x645
						.HI		.27	6560	47	500		
								.30	6920				
								.40	7269				

10-20 mm **.01 .02** Espesor del falso techo
Ceiling thickness

12,5 mm **.03** Espesor del falso techo
Ceiling thickness

Con difusor opal.
With opal optic cover.

* .03 is Class I - *.03 es Clase I.*

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10062.XX.TR.XX.XX.XX.X.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

CRISMOSIL

.TR

TRIMLESS

● Select finishes

.WH-WH

CRISMOSIL | 0° | 0° | CRI ≥90 | IK06 | IP20 IP23 | LIFE 50000H | DIM OPTIONAL | | INTEGRATED | INDOOR | | | 220-240 V 50-60 Hz | CE

VOLCANO

REF 10062.TR

PHOTOMETRY

OPAL

VOLCANO DEEP	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10063	.01	●	GU5.3		GU5.3	-			8	-		
				GU10	.GU	GU10							
				LED	.OP	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	767				

VOLCANO DEEP	REF.	DIMEN-SIONS	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10063	.02	●	LED	.OP	.ST BPM3181	.9	.27	1538	16	500	.DA .PU .D1	
								.30	1722				
								.40	1355				

VOLCANO DEEP	REF.	DIMEN-SIONS	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10063	.03 *	●	LED	.OP	.ST	.9	.27	3280	23	500	.DA .PU .D1	
								.30	3480				
								.40	3640				
						.HI		.27	6560	47	500		
								.30	6920				
								.40	7269				

10-20 mm **.01 .02** Espesor del falso techo
Ceiling thickness

12,5 mm **.03** Espesor del falso techo
Ceiling thickness

Con difusor opal.
With opal optic cover.

* .03 is Class I - *.03 es Clase I.*

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10063.XX.TR.XX.XX.XX.X.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

CRISMOSIL

.TR

TRIMLESS

● Select finishes

.WH-WH

VOLCANO DEEP

REF 10063.TR

PHOTOMETRY

OPAL

ESPIGA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10086	.01	●	GU5.3		GU5.3	-			8	-		180x180 / 180
				GU10	.GU	GU10							
				LED	.OP	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	767				

ESPIGA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10086	.02	●	LED	.OP	.ST BPM3181	.9	.27	1538	16	500	.DA .PU .D1	230x230 / 140
								.30	1722				
								.40	1355				

ESPIGA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10086	.03*	●	LED	.OP	.ST BPM200	.9	.27	1647	25	600	.DA .PU .D1	280x280 / 140
								.30	1700				
								.40	2040				

10-20 mm Espesor del falso techo / Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10086.XX.TR.XX.XX.XX.X.XX.XX

* .03 is Class I - *.03 es Clase I.*

• FINISHES

□

• DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

CRISMOSIL

.TR

TRIMLESS

● Select finishes

.WH-WH

ESPIGA

REF 10086.TR



PHOTOMETRY

OPAL

ESPIGA SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10083	.01	●	GU5.3		GU5.3	-			8	-		170x170 / 180
				GU10	.GU	GU10							
				LED	.OP	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	165x165 / 90x90
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	767				

ESPIGA SQ	REF.	DIMEN-SIONS	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10083	.02	●	LED	.OP	.ST BPM3181	.9	.27	1538	16	500	.DA .PU .D1	220x220 / 160
								.30	1722				215x215 / 140x140
								.40	1355				

ESPIGA SQ	REF.	DIMEN-SIONS	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10083	.03*	●	LED	.OP	.ST BPM200	.9	.27	1647	25	600	.DA .PU .D1	270x270 / 135
								.30	1700				265x265 / 190x190
								.40	2040				

10-20 mm Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10083.XX.TR.XX.XX.XX.X.XX.XX

* .03 is Class I - *.03 es Clase I.*

• FINISHES

□

• DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

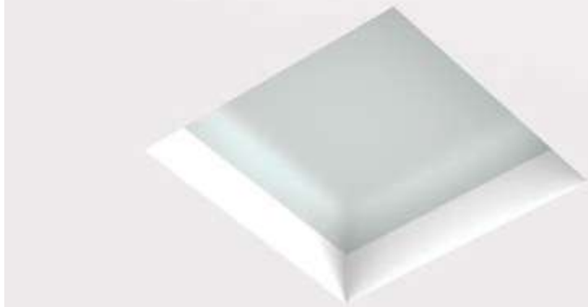

CRISMOSIL

TRIMLESS

.TR

● Select finishes

.WH-WH

CRISMOSIL | 0° | 0° | CRI ≥90 | IK06 | IP20 IP23 | LIFE 50000H | DIM OPTIONAL | | INTEGRATED | INDOOR | | | 220-240 V 50-60 Hz | CE

ESPIGA SQ

REF 10083.TR



PHOTOMETRY

OPAL

ESPIGA SIRIO	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10077	.01	●	GU5.3		GU5.3	-			8	-		250x250 / 200
				GU10	.GU	GU10							
				LED	.OP	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	80 / Ø100 / 245x245
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	767				

ESPIGA SIRIO	REF.	DIMEN-SIONS	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10077	.02	●	LED	.OP	.ST BPM3181	.9	.27	1538	16	500	.DA .PU .D1	300x300 / 140 / 80 / Ø150 / 295x295
								.30	1722				
								.40	1355				

ESPIGA SIRIO	REF.	DIMEN-SIONS	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10077	.03*	●	LED	.OP	.ST BPM200	.9	.27	1647	25	600	.DA .PU .D1	350x350 / 135 / 75 / Ø200 / 345x345
								.30	1700				
								.40	2040				

10-20 mm Espesor del falso techo / Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order ⬟ ● ■ ▼

10077.XX.TR.XX.XX.XX.X.XX.XX

* .03 is Class I - *.03 es Clase I.*

• FINISHES

□

⬟ DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

CRISMOSIL

.TR

TRIMLESS

● Select finishes

.WH-WH

CRISMOSIL | 0° | 0° | CRI ≥90 | IK06 | IP20 IP23 | LIFE 50000H | DIM OPTIONAL | | INTEGRATED | INDOOR | | | 220-240 V 50-60 Hz | CE

ESPIGA
SIRIO

REF 10077.TR

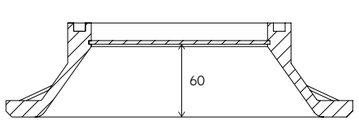

PHOTOMETRY

OPAL

ESPIGA SIRIO TWINS	REF.	DIMEN-SIONS	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	30000	.01	●	LED	.OP	.ST	.9	.27	3280	23	500	.DA .PU .D1	
								.30	3480				
								.40	3640				
						.HI		.27	6560	47	500		
								.30	6920				
								.40	7269				

10 - 20 mm Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 30000.01.TR.XX.XX.XX.X.XX.XX

• FINISHES

□

• DIMENSIONS

.01

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

CRISMOSIL

.TR

TRIMLESS

● Select finishes

.WH-WH

ESPIGA
SIRIO TWINS

REF 30000.TR



PHOTOMETRY



OPAL

ESPIGA ORIONIS	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10080	.01	●	GU5.3		GU5.3	-			8	-		245x245 / 180
				GU10	.GU	GU10							
				LED	.OP	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	240x240 / 90x90
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	767				

ESPIGA ORIONIS	REF.	DIMEN-SIONS	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10080	.02	●	LED	.OP	.ST BPM3181	.9	.27	1538	16	500	.DA .PU .D1	305x305 / 140
								.30	1722				300x300 / 140x140
								.40	1355				

ESPIGA ORIONIS	REF.	DIMEN-SIONS	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10080	.03*	●	LED	.OP	.ST BPM200	.9	.27	1647	25	600	.DA .PU .D1	345x345 / 155
								.30	1700				340x340 / 190x190
								.40	2040				

10 - 20 mm ↕ Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10080.XX.TR.XX.XX.XX.X.XX.XX

* .03 is Class I - *.03 es Clase I.*

• FINISHES

□

⬟ DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

CRISMOSIL

.TR

TRIMLESS

● Select finishes

.WH-WH

CRISMOSIL | 0° | 0° | CRI ≥90 | IK06 | IP20 IP23 | LIFE 50000H | DIM OPTIONAL | | INTEGRATED | INDOOR | | | 220-240 V 50-60 Hz | CE

ESPIGA ORIONIS

REF 10080.TR



PHOTOMETRY

OPAL

ESPIGA ORIONIS TWINS	REF.	DIMEN-SIONS	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	30001	.01	●	LED	.OP	.ST	.9	.27	-	20	500	.DA .PU .D1	
								.30	3040				
								.40	3180				
						.HI		.27	-	41	500		
								.30	6060				
								.40	6360				

10 - 20 mm Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | ⬟ ● ■ ▼ 30001.01.TR.XX.XX.XX.X.XX.XX

• FINISHES

□

• DIMENSIONS

.01

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

CRISMOSIL

.TR

TRIMLESS

● Select finishes

.WH-WH

ESPIGA
ORIONIS TWINS

REF 30001.TR



PHOTOMETRY

OPAL

• FINISHES

□

• DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

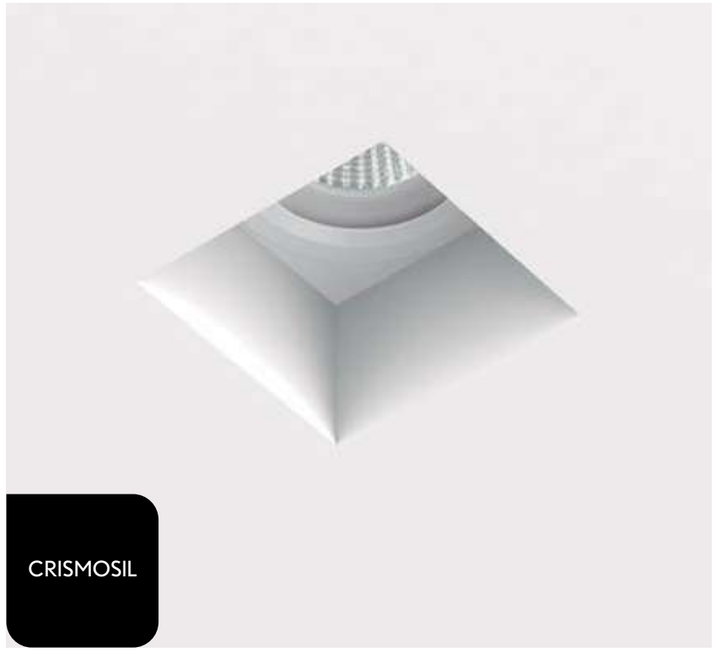

ZENIT SQ	REF.	DIMENSIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	30002	.01	.WH-WH	GU5.3		GU5.3		-		8	-		125x125 115
				GU10	.GU	GU10							56x56 120x120
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	767				

7 - 22 mm Espesor del falso techo / Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 30002.01.TR.XX.XX.XX.X.XX.XX

ZENIT SQ

REF 30002.TR

PHOTOMETRY

40º 60º



• FINISHES

□

• DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ZENIT	REF.	DIMENSIONS ⬟	FINISHES ●	LAMP	BEAM ANGLE ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10123	.01	.WH-WH	GU5.3		GU5.3		-		8	-		Ø135 mm 115
				GU10	.GU	GU10							Ø52 Ø130
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	767				

7 - 22 mm Espesor del falso techo / Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10123.01.TR.XX.XX.XX.X.XX.XX

ZENIT

REF 10123.TR

PHOTOMETRY

40º 60º



• FINISHES

□

• DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ZENIT DEEP	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	30004	.01	.WH-WH	GU5.3		GU5.3		-		8	-		
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	767				

7 - 22 mm Espesor del falso techo / Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 30004.01.TR.XX.XX.XX.X.XX.XX

ZENIT
DEEP

REF 30004.TR

PHOTOMETRY

40º 60º



• FINISHES

□

• DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ZENIT DEEP TWINS	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	30005	.01	.WH-WH	GU5.3		GU5.3		-		8	-		
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	1052	8	350	.DA .PU .D1	
								.30	1140				
								.40	1422				
						.HI BPM300		.27	1414	16	500		
								.30	1854				
								.40	1534				

7 - 22 mm * Espesor del falso techo / Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 30005.01.TR.XX.XX.XX.X.XX.XX

ZENIT
DEEP TWINS

REF 30005.TR

PHOTOMETRY

40º 60º



• FINISHES

□

• DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ZENIT MOVE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10125	.01	.WH-WH	GU5.3		GU5.3	-			8	-		Ø145 / 123
				GU10	.GU	GU10							 Ø90 / Ø140
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	
								.30	570				
								.40	711				

7 - 22 mm Espesor del falso techo / Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order ⬟ ● ■ ▼

10125.01.TR.XX.XX.XX.X.XX.XX

ZENIT MOVE

REF 10125.TR

PHOTOMETRY

40º 60º



• FINISHES

□

• DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ZENIT MOVE SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	30003	.01	.WH-WH	GU5.3		GU5.3	-			8	-		145x145 mm / 120
				GU10	.GU	GU10							 80x80 / 140x140
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	
								.30	570				
								.40	711				

7 - 22 mm Espesor del falso techo / Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order ⬟ ● ■ ▼

30003.01.TR.XX.XX.XX.X.XX.XX

ZENIT MOVE SQ

REF 30003.TR

PHOTOMETRY

40º 60º



• FINISHES

□

• DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ZENIT ORTO	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10126	.01	.WH-WH	GU5.3		GU5.3	-			8	-		Ø140 / 125
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	Ø75 / Ø135
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	767				

7 - 22 mm Espesor del falso techo / Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10126.01.TR.XX.XX.XX.X.XX.XX

ZENIT ORTO

REF 10126.TR

PHOTOMETRY

40º 60º



• FINISHES

□

• DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

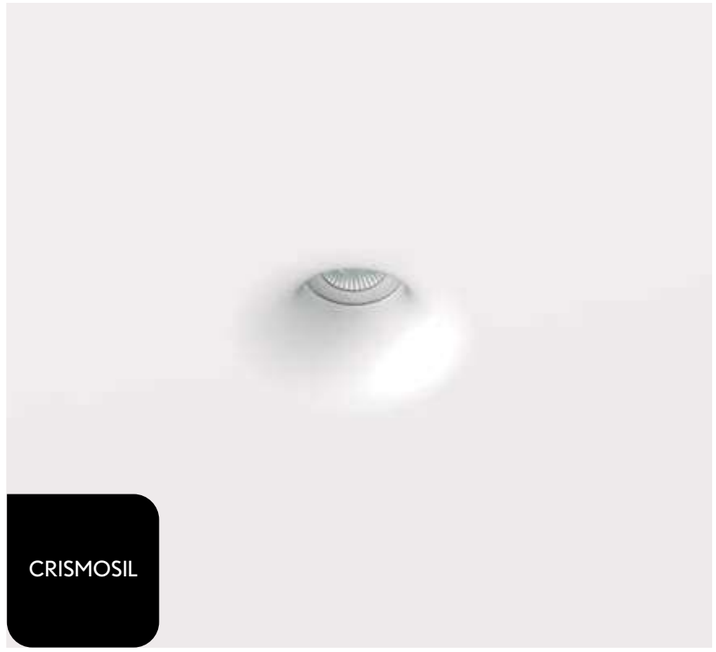

ZENIT SIDEREA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10050	.01	.WH-WH	GU5.3		GU5.3	-			8	-		140X140 / 130
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	Ø52 / 135x135
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	767				

7 - 22 mm Espesor del falso techo / Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10050.01.TR.XX.XX.XX.X.XX.XX

ZENIT SIDEREA

REF 10050.TR

PHOTOMETRY

40º 60º



• FINISHES

□

• DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

CRISMOSIL

Puede fijarse en cualquier posición desde empotrado hasta 35mm de saliente.
It can be mounted in any position from recessed up to 35mm protruding.

ZENIT ZUBIA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10122	.01	.WH-WH .WH-BK	GU5.3		GU5.3	-			8	-		
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	767				

145x145 118 Ø56 140x140

7 - 22 mm Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10122.01.TR.XX.XX.XX.X.XX.XX

ZENIT
ZUBIA

REF 10122.TR

PHOTOMETRY

40º 60º



• FINISHES

□

• DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

CRISMOSIL

Puede fijarse en cualquier posición desde empotrado hasta 35mm de saliente.
It can be mounted in any position from recessed up to 35mm protruding.

ZENIT ZUBIASQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10121	.01	.WH-WH .WH-BK	GU5.3		GU5.3	-			8	-		
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	767				

145x145 mm 118 56x56 140x140

7 - 22 mm Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10121.01.TR.XX.XX.XX.X.XX.XX

ZENIT
ZUBIA SQ

REF 10121.TR

PHOTOMETRY

40º 60º



SUNSET	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10124	.01	●	GU5.3		GU5.3	-			8	-		
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	
								.30	570				
								.40	711				

SUNSET	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10124	.02	●	GU5.3		GU5.3	-			8	-		
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	
								.30	570				
								.40	711				

SUNSET	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10124	.03	●	GU5.3		GU5.3	-			200	-		
				GU10	.GU	GU10				150			
				GX8.5	.CD	GX8.5				140			
				LED	.40 .60	.ST BPM3181	.9	.27	1538	16	500	.DA .PU .D1	
								.30	1722				
								.40	1355				

7 - 22 mm **.01** Espesor del falso techo
Ceiling thickness

10 -20 mm **.02 .03** Espesor del falso techo
Ceiling thickness

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order ⬟ ● ■ ▼

10124.XX.TR.XX.XX.XX.X.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10 | GX8.5

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

CRISMOSIL

TRIMLESS

.TR

- Select finishes

.WH-WH

CRISMOSIL | 0º | 0º | CRI ≥90 | IK06 | IP20 IP23 | LIFE 50000H | DIM OPTIONAL | | INTEGRATED | INDOOR | | | 220-240 V 50-60 Hz | CE

SUNSET

REF 10124.TR



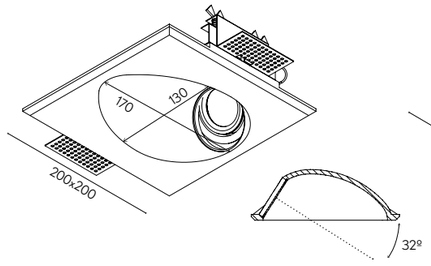

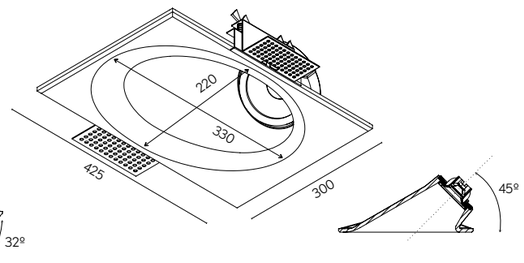

PHOTOMETRY

40º 60º

VEGA ADHARA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10016	.01	●	GU5.3		GU5.3	-			8	-		215x215 / 142
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	Ø73 / Ø170 / 210x210
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	767				

VEGA ADAHARA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10016	.02	●	GU5.3		GU5.3	-			100	-		305x305 / 151
				GU10	.GU	GU10				75			
				GX8.5	.CD	GX8.5				70			
				LED	.40 .60	.ST BPM3181	.9	.27	1538	16	500	.DA .PU .D1	Ø150 / Ø260 / 300x300
								.30	1722				
								.40	1355				

10 - 20 mm **.01** Espesor del falso techo
Ceiling thickness

13 mm **.02** Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order ⬟ ● ■ ▼

10016.XX.TR.XX.XX.XX.X.XX.XX

• FINISHES

□

• DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10 | GX8.5

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

CRISMOSIL

.TR

TRIMLESS

VEGA ADHARA

REF 10016.TR

● Select finishes

.WH-WH

CRISMOSIL | 45º | 0º | CRI ≥90 | IK06 | IP20 IP23 | L80B10 50000H | DIM OPTIONAL | INTEGRATED | INDOOR | 220-240 V 50-60 Hz | CE



PHOTOMETRY

40º 60º

VEGA ADHARA TWINS	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10066	.01	●	GU5.3		GU5.3	-			100	-		310x215 / 137 
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	1052	16	350	.DA .PU .D1	
								.30	1140				
								.40	1422				
						.HI BPM300		.27	1414	20	500		
								.30	1854				
								.40	1534				

VEGA ADHARA TWINS	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10066	.02	●	GU5.3		GU5.3	-			200	-		485x305 / 135 
				GU10	.GU	GU10				150			
				GX8.5	.CD	GX8.5				140			
				LED	.40 .60	.ST BPM3181	.9	.27	3.076	32	500	.DA .PU .D1	
								.30	3.444				
								.40	2.710				

10 - 20 mm * Espesor del falso techo Ceiling thickness

13 mm * Espesor del falso techo Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order ⬟ ● ■ ▼

10066.XX.TR.XX.XX.XX.X.XX.XX

• FINISHES

□

• DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10 | GX8.5

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

CRISMOSIL

.TR

TRIMLESS

VEGA
ADHARA TWINS
REF 10066.TR

● Select finishes

.WH-WH

CRISMOSIL | 45º | 0º | CRI ≥90 | IK06 | IP20 IP23 | LIFE 50000H | DIM OPTIONAL | | INTEGRATED | INDOOR | | | 220-240 V 50-60 Hz | CE



PHOTOMETRY

40º 60º

VEGA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10028	.01	●	GU5.3		GU5.3	-			8	-		
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	767				

VEGA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10028	.02	●	GU5.3		GU5.3	-			100	-		
				GU10	.GU	GU10				150			
				GX8.5	.CD	GX8.5				140			
				LED	.40 .60	.ST BPM3181	.9	.27	1538	16	500	.DA .PU .D1	
								.30	1722				
								.40	1355				

10 - 20 mm * Espesor del falso techo Ceiling thickness

13 mm * Espesor del falso techo Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order ⬟ ● ■ ▼

10028.XX.TR.XX.XX.XX.X.XX.XX

• FINISHES

□

• DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10 | GX8.5

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

CRISMOSIL

.TR

TRIMLESS

• Select finishes

.WH-WH

VEGA

REF 10028.TR

10028.01



10028.02



PHOTOMETRY

40º

60º

VEGA TWINS	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10070	.01	●	GU5.3		GU5.3	-			100	-		280x170 / 137
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	1052	16	350	.DA .PU .D1	
								.30	1140				
								.40	1422				
						.HI BPM300		.27	1414	20	500		
								.30	1854				
								.40	1534				

VEGA TWINS	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10070	.02	●	GU5.3		GU5.3	-			200	-		305x170 / 125
				GU10	.GU	GU10				150			
				GX8.5	.CD	GX8.5				140			
				LED	.40 .60	.ST BPM3181	.9	.27	3076	32	500	.DA .PU .D1	
								.30	3444				
								.40	2710				

10 - 20 mm * Espesor del falso techo Ceiling thickness

13 mm * Espesor del falso techo Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10070.XX.TR.XX.XX.XX.X.XX.XX

• FINISHES

□

• DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10 | GX8.5

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

CRISMOSIL

.TR

TRIMLESS

VEGA TWINS

REF 10070.TR

• Select finishes

.WH-WH

CRISMOSIL | 0º | 0° | CRI ≥90 | IK06 | IP20 IP23 | L80B10 50000H | DIM OPTIONAL | | INTEGRATED | INDOOR | | | 220-240 V 50-60 Hz | CE

10070.01



10070.02



PHOTOMETRY

40º 60º

VEGA ZETA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10001	.01	●	GU5.3		GU5.3	-			8	-		205x205 / 120
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	767				

10 - 20 mm * Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order ⬟ ● ■ ▼

10001.01.TR.XX.XX.XX.X.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

CRISMOSIL

.TR

TRIMLESS

● Select finishes

.WH-WH

VEGA ZETA

REF 10001.TR

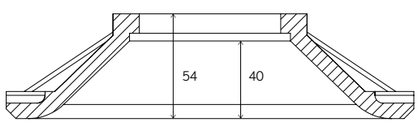

PHOTOMETRY

40º 60º

VEGA ZETA SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10019	.01	●	GU5.3		GU5.3	-			8	-		225x225 115
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	220x220 150x150
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	767				
	10019	.02	●	GU5.3		GU5.3	-			100	-		225x225 130
				GU10	.GU	GU10				75			
				GX8.5*	.CD	GX8.5				70			
				LED	.40 .60	.ST BPM3181	.9	.27	1538	16	500	.DA .PU .D1	220x220 150x150
								.30	1722				
								.40	1355				

10 - 20 mm

* Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order | 10019.XX.TR.XX.XX.XX.X.XX.XX

* GX8.5 is Class I - *GX8.5 es Clase I.*

• FINISHES

□

⬟ DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10 | GX8.5

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

.TR

TRIMLESS

CRISMOSIL

VEGA ZETA SQ

REF 10019.TR

• Select finishes

.WH-WH

CRISMOSIL | 45º | 350º | CRI ≥90 | IK06 | IP20 IP23 | L80 50000H | DIM OPTIONAL | INTEGRATED | INDOOR | 220-240 V 50-60 Hz | CE

10019.01



10019.02



PHOTOMETRY

40º 60º

VEGA ZETA SQ TWINS	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10072	.02	●	GU5.3		GU5.3	-			200	-		390x225 / 150
				GU10	.GU	GU10				150			
				GX8.5*	.CD	GX8.5				140			
				LED	.40 .60	.ST BPM3181	.9	.27	3076	32	500	.DA .PU .D1	312 / 392 / 150 / 220
								.30	3444				
								.40	2710				

13 mm * Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order ⬟ ● ■ ▼

10070.02.TR.XX.XX.XX.X.XX.XX

* GX8.5 is Class I - *GX8.5 es Clase I.*

• FINISHES

□

⬟ DIMENSIONS

.02

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10 | GX8.5

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

CRISMOSIL

.TR

TRIMLESS

VEGA
ZETA SQ TWINS

REF 10072.TR

● Select finishes

.WH-WH



PHOTOMETRY

40º

60º

CENTAURO	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10109	.01	●	LED	.40 .60	.ST	.9	.30	790	7	350	.DA .PU .D1	
								.40	796				

CENTAURO	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10109	.02	●	LED	.40 .60	.ST	.9	.30	1840	20	540	.DA .PU .D1	
								.40	2010				

CENTAURO	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10109	.03	●	LED	.40 .60	.ST	.9	.30	3200	40	750	.DA .PU .D1	
								.40	3320				

10 - 20 mm * Espesor del falso techo
Ceiling thickness

LUMINAIRE INCLUDES

Recessed with frame mounting kit

Reference order ⬟ ● ■ ▼

10109.XX.TR.XX.XX.XX.X.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

40º | 60º

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

CRISMOSIL

.TR

TRIMLESS

• Select finishes

.WH-WH

CENTAURO

REF 10109.TR



PHOTOMETRY

40º 60º

TRACK

VISUAL INDEX

PATRICIA TK

PATRICIA TK

30514 PAG. 736

MARTORELL

MARTORELL

20115 PAG. 744

MARTORELL TUBE MOVE

20138 PAG. 746

KLIMT

KLIMT

20134 PAG. 748

GEO

GEO

30511 PAG. 750

LUK

LUK CRUSADER

20082 PAG. 752

LUK HAWKEYE

20083 PAG. 754

LUK HAWKEYE 2

20084 PAG. 754

CUBE

CUBE TUBE

9050 PAG. 756

ORACLE

ORACLE

20087 PAG. 758

ALBA

ALBA

10160 PAG. 760

ALBA PLUS

10178 PAG. 764

One design, endless solutions

With flair and imagination, some products offer boundless possibilities. One of these is Patricia, the epitome of versatility.

Simple designs that enhance every project and adapt to every need. What's the secret? The accessories - Honey comb, cross ring, barndoors, spot lenses, halves, extenders and ovals – designed to bring light into the dark, to create elliptical shapes, spotlight effects, to draw the eye to a specific place, and much more.

Un diseño, múltiples soluciones

Hay productos que, con la destreza necesaria, permiten amplias posibilidades de aplicación. Y hay productos como Patricia, que son en sí mismos la máxima expresión de versatilidad.

Modelos de estética sencilla pero diseñados para evolucionar y adaptarse a cada exigencia. ¿Cómo conseguirlo? Gracias a sus accesorios - Honey comb, cross Ring, aletas, lentes concentradas, medias, extensivas y ovales – pensados para dar solución a situaciones de deslumbramiento, conseguir formas de luz elípticas, focales, direccionar el interés sobre un punto....Y un largo etcétera.

PATRICIA TK

TRACK

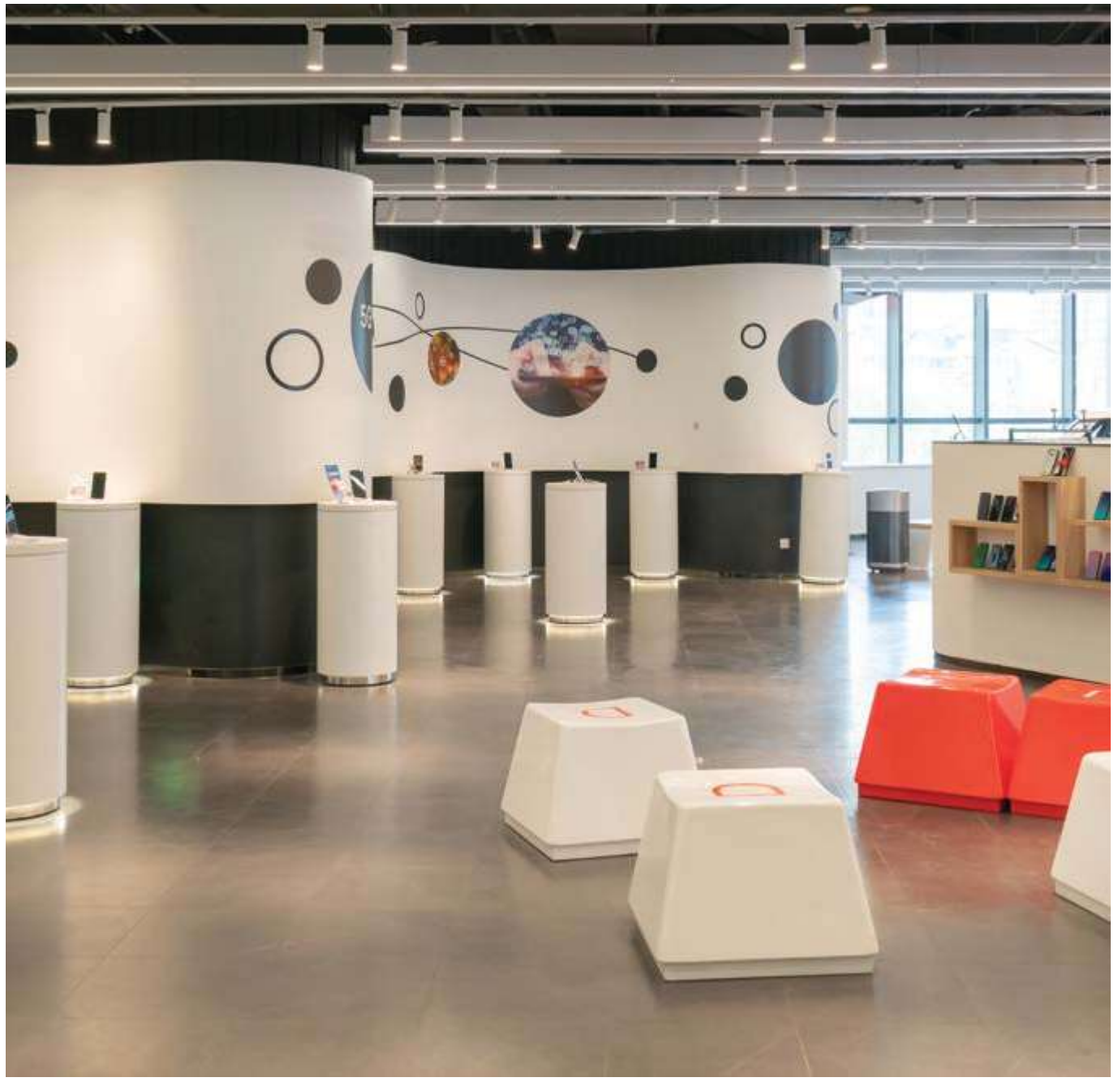

• FINISHES

COLOR

□ ■

DIMENSIONS

⬟ DIAMETERS

.01 | .02 | .03 | .04

LIGHTING OPTIONS

■ BEAM ANGLE

15º | 24º | 36º | 45º | 50º | 55º

POWER

STANDARD | HIGH (ONLY .03)

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White

new

UGR <19

.TK

TRACKLIGHT

PATRICIA TK

REF 30514.TK

INSTALLATIONS

ALUMINIUM PC | 350° | 90° | CRI ≥90 | IK06 | IP20 | LIFE 50000H | DIM OPTIONAL | | INTEGRATED | INDOOR | 220-240 V 50-60 Hz | CE

.TK
TRACKLIGHT

·30514 PATRICIA TK | TK
Pag. 738



PATRICIA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	30514	.01	●	LED	.24 .36 .45 .55	.ST	.9	.27	713	10	250	.DA	 130 Ø45
								.30	752				
								.40	919				
	30514	.02	●	LED	.24 .36 .45 .55	.ST	.9	.27	1110	15	350	.DA	 150 Ø55
								.30	1200				
								.40	1250				
	30514	.03	●	LED	.15 .24 .36 .50	.ST	.9	.27	1853	25	600	.DA	 170 Ø69
								.30	1912				
								.40	1976				
						.HI		.27	2221	32	750		
								.30	2399				
								.40	2470				
	30514	.04	●	LED	.15 .24 .36 .50	.ST	.9	.27	3135	42	1050	.DA	 190 Ø82
								.30	3584				
								.40	3910				

Reference order | 30514.XX.TK.XX.XX.XX.9.XX.XX

*1 Dimmable .DA requires DALI adapter ACC6685 and luminaire is Class I / Regulación .DA requiere adaptador DALI ACC6685 y la luminaria es Clase I

ACCESORIES

BARN DOOR	⬟ DIMENSIONS								● FINISHES
ACC30514									.WH .BK
	.01	Ø45x130	.02	Ø55	.03	Ø69	.04	Ø82	

⬟ ● ACC30514.XX.BD.XX

CROSS RING	⬟ DIMENSIONS								● FINISHES
ACC30514									.WH .BK
	.01	Ø45x130	.02	Ø55	.03	Ø69	.04	Ø82	

⬟ ● ACC30514.XX.CR.XX

HONEY COMB	⬟ DIMENSIONS								● FINISHES
ACC30514									.BK-BK
	.01	Ø45x130	.02	Ø55	.03	Ø69	.04	Ø82	

⬟ ● ACC30514.XX.HC.XX

TRACKLIGHT

.TK

- Select finishes

.WH-WH

.BK-BK

ALUMINIUM PC · 350° · 90° · CRI ≥90 · IK06 · IP20 · LIFE 50000H · DIM OPTIONAL · INTEGRATED · INDOOR · 220-240 V 50-60 Hz · CE

PATRICIA TK

REF 30514.TK

PHOTOMETRY

15º 24º 36º 40º 45º 50º 55º

OVAL FLOOD LENSE *1

ACC30514.XX.XXXX



OVAL FLOOD LENSE	DIMENSIONS	LENSE EFFECT
ACC30514	.01	.OV.03X60
	.02	
	.03	
	.04	



OVAL FLOOD LENSE	DIMENSIONS	LENSE EFFECT
ACC30514	.01	.OV.60X10
	.02	
	.03	
	.04	



OVAL FLOOD LENSE	DIMENSIONS	LENSE EFFECT
ACC30514	.01	.OV.10X40
	.02	
	.03	
	.04	



OVAL FLOOD LENSE	DIMENSIONS	LENSE EFFECT
ACC30514	.01	.OV.15X60
	.02	
	.03	
	.04	

ZOOM SPOT LENSE *1

ACC30514.XX.XXXX



OVAL FLOOD LENSE	DIMENSIONS	LENSE EFFECT
ACC30514	.01	.ZSX1.3
	.02	
	.03	
	.04	



OVAL FLOOD LENSE	DIMENSIONS	LENSE EFFECT
ACC30514	.01	.ZSX1.5
	.02	
	.03	
	.04	



OVAL FLOOD LENSE	DIMENSIONS	LENSE EFFECT
ACC30514	.01	.ZSX2
	.02	
	.03	
	.04	



OVAL FLOOD LENSE	DIMENSIONS	LENSE EFFECT
ACC30514	.01	.ZSX3
	.02	
	.03	
	.04	

*1 For best performance, optic lenses are only recommended with the smallest option (.24 for models 01 & 02 and .15 for .03 and .04). *Para garantizar un resultado óptimo, las lentes solo se recomiendan para la óptica de menor tamaño (.24 para los modelos 01 & 02 y .15 para .03 y .04).*

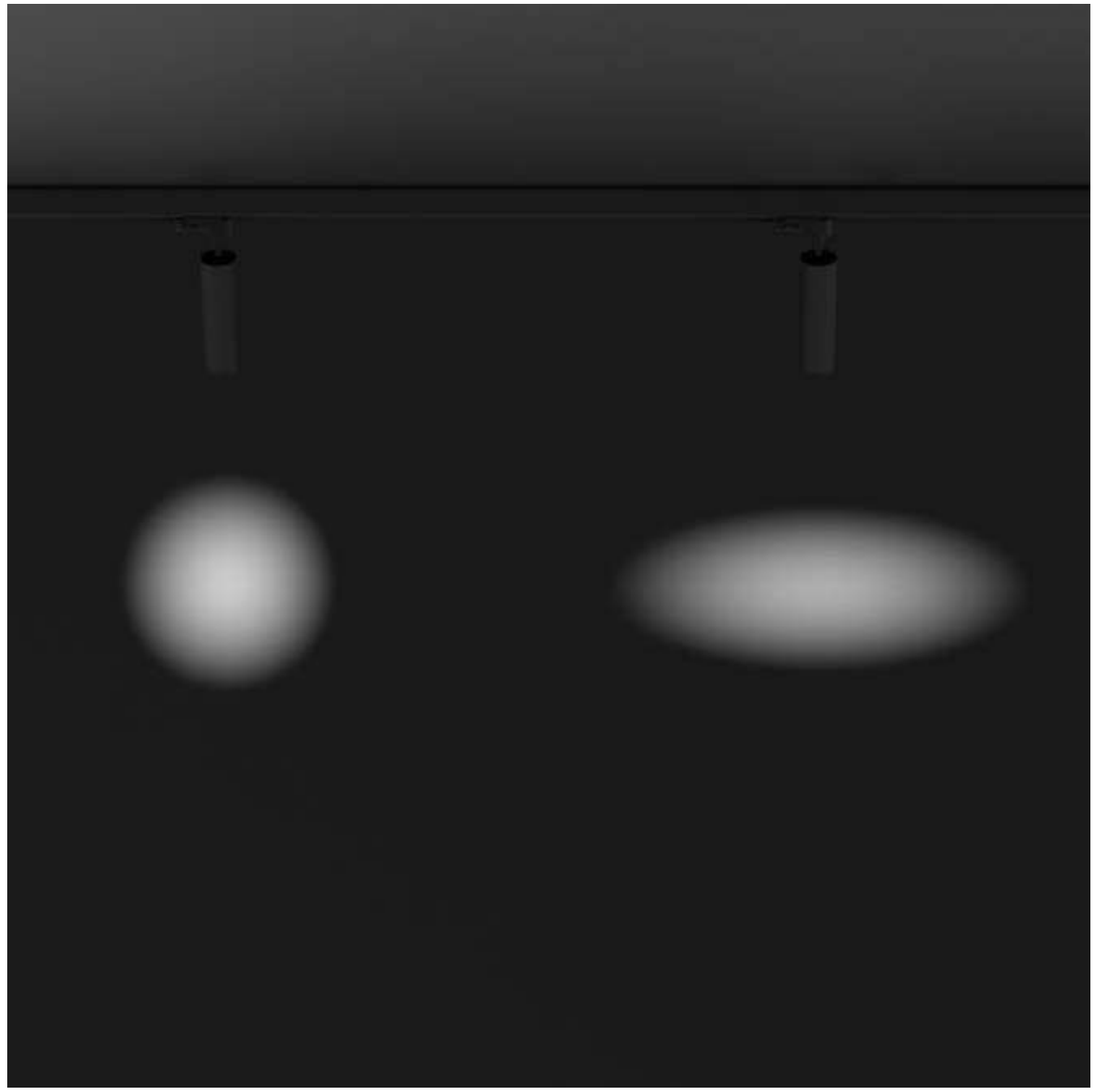

PATRICIA TK

REF 30514.TK

MARTORELL	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	20115	**.03**	●	**LED**	**.24** **.32**	**.ST**	**.9**	**.27**	715	10	500	**.DA** **.D1**	
								.30	780				
								.40	805				

Reference order | ⬟ ● ■ ▼ 20115.03.TK.XX.XX.ST.9.XX.XX

● Select finishes

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.03

LIGHTING OPTIONS

■ BEAM ANGLE

24º | 32º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White
Honey Comb
Wireless Control Options
Special RAL Color

INSTALLATIONS

MARTORELL

REF 20115.TK

.PN
PENDANT

·20115 MARTORELL | PN
Pag. 322

.TK
TRACKLIGHT

·20115 MARTORELL | TK
Pag. 744

.SR
SURFACE

·20115 MARTORELL | SR
Pag. 322

.RF
RECESSED FRAME

·20115 MARTORELL | RF
Pag. 494

.TR
TRIMLESS

·20115 MARTORELL | TR
Pag. 676

PHOTOMETRY

24º 32º

MARTORELL TUBE MOVE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20138	**.03**	●	**LED**	**.19** **.24** **.36**	**.ST**	**.9**	**.27**	796	10	500	**.DA*1** **.D1*2**	
								.30	841				
								.40	929				

Reference order | ⬟ ● ■ ▼ 20138.03.TK.XX.XX.ST.9.XX.XX

*1 Dimmable .DA requires DALI adapter ACC6685
Regulación .DA requiere adaptador DALI ACC6685

*2 Dimmable .D1 requires driver box / Regulación .D1 requiere caja para alojar el driver

● Select finishes

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

19º | 24º | 36º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White

MARTORELL
TUBE MOVE

REF 20138.TK

PHOTOMETRY

19º 24º 36º

INSTALLATIONS

.SR
SURFACE

·20138 MARTORELL TUBE MOVE | SR
Pag. 326

.TK
TRACKLIGHT

·20138 MARTORELL TUBE MOVE | TK
Pag. 746

KLIMT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	20134	**.01**	●	LED	**.15 .24 .38**	**.ST**	**.9**	**.27**	395	8	700	**.DA*1 .D1*2**	
								.30	497				
								.40	550				
	20134	**.02**	●	LED	**.15 .25 .38 .60**	**.ST**	**.9**	**.27**	803	11	500	**.DA*1 .D1*2**	
								.30	983				
								.40	991				
	20134	**.03**	●	LED	**.15 .28 .40 .60**	**.ST**	**.9**	**.27**	1945	30	700	**.DA*1 .D1*2**	
								.30	2073				
								.40	2311				





Reference order ⬟ ● ■ ▼

20134.XX.TK.XX.XX.ST.9.XX.XX

PHOTOMETRY

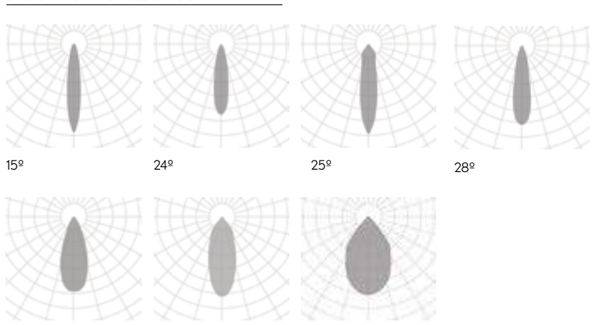

● Select external - internal finishes

*1 Dimmable .DA requires DALI adapter ACC6685
Regulación .DA requiere adaptador DALI ACC6685

*2 Dimmable .D1 requires driver box / Regulación .D1 requiere caja para alojar el driver

• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

15º | 24º | 25º | 28º | 38º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White

.TK

TRACKLIGHT

INSTALLATIONS
INSTALACIONES

KLIMT

REF 20134.TK

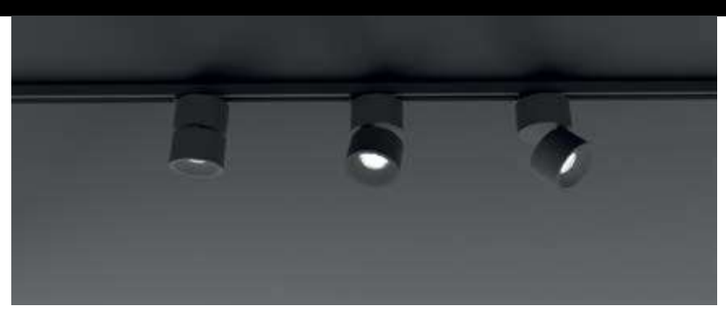

.SR
SURFACE

·20134 KLIMT | SR
Pag. 338

.TK
TRACKLIGHT

·20134 KLIMT | TK
Pag. 748

.RF
RECESSED FRAME

·20134 KLIMT | RF
Pag. 508

GEO	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	30511	.01	●	LED	.15 .24 .38	.ST	.9	.27	498	8	700	.DA*1 .D1*2	
								.30	513				
								.40	622				
	30511	.02	●	LED	.15 .25 .38 .60	.ST	.9	.27	1075	14	350	.DA*1 .D1*2	
								.30	1114				
								.40	1319				
	30511	.03	●	LED	.15 .28 .40	.ST	.9	.27	1856	30	700	.DA*1 .D1*2	
								.30	1963				
								.40	2529				

Reference order | ⬟ ● ■ ▼ 30511.XX.TK.XX.XX.ST.9.XX.XX

PHOTOMETRY

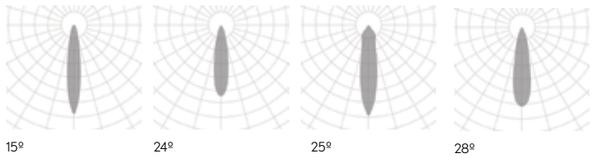

● Select external - internal finishes

BK-BK WH-WH

*1 Dimmable .DA requires DALI adapter ACC6685
Regulación .DA requiere adaptador DALI ACC6685
*2 Dimmable .D1 requires driver box
Regulación .D1 requiere caja para alojar el driver

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

15º | 24º | 25º | 28º | 38º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White

new

.TK

TRACKLIGHT

INSTALLATIONS

ALUMINIUM PC | 90° | 350° | CRI ≥90 | IK06 | IP20 | LIFE 50000H | DIM OPTIONAL | INTEGRATED | INDOOR | 220-240 V 50-60 Hz | CE

GEO

REF 30511.TK

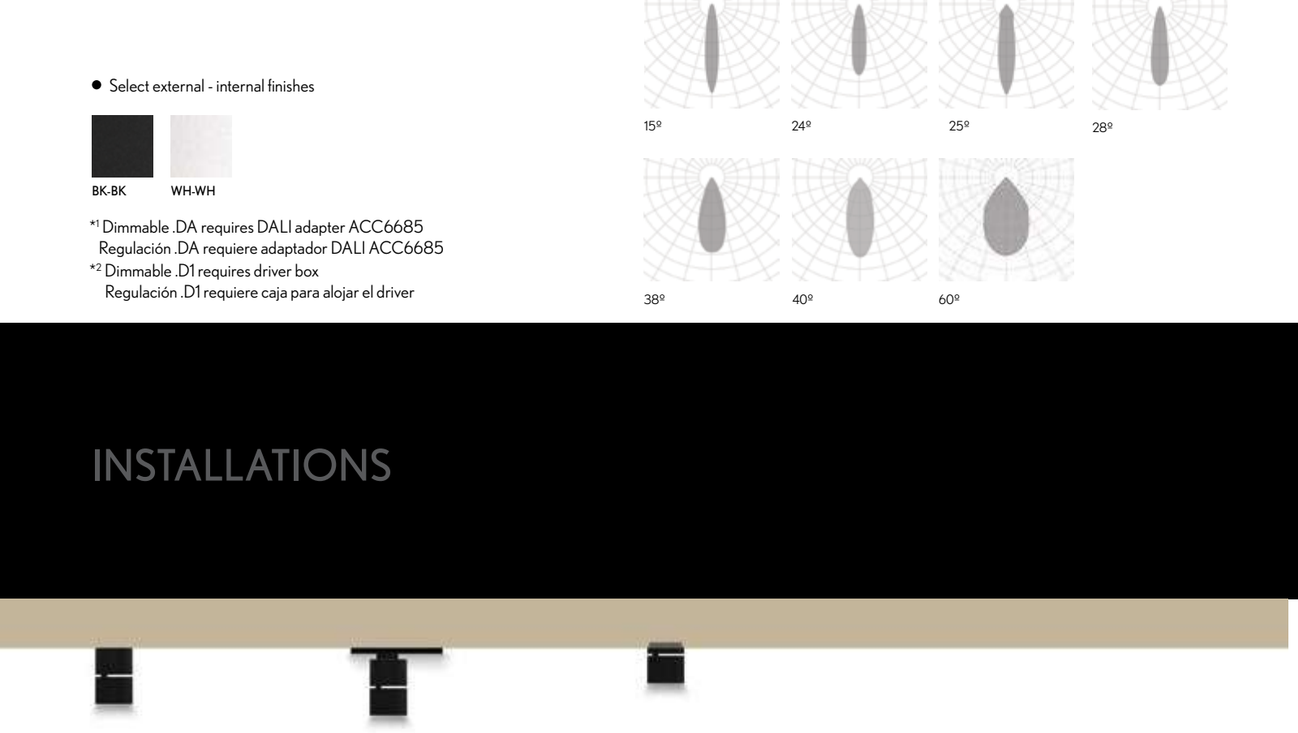

.SR
SURFACE

·30511 GEO | SR
Pag. 342

.TK
TRACKLIGHT

·30511 GEO | TK
Pag. 750

.RF
RECESSED FRAME

·30511 GEO | RF
Pag. 512

LUK CRUSADER	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20082	.01	●	LED	.24 .40 .60	.ST	.9	.27	1633	26	700	.DA .D1	
								.30	2138				
								.40	2228				

Reference order | 20082.01.TK.XX.XX.XX.ST.9.XX.XX

● Select finishes



• FINISHES

COLOR

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

24º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White

.TK

TRACKLIGHT

INSTALLATIONS



LUK CRUSADER

REF 20082.TK

.SR
SURFACE

·20082 LUK CRUSADER | SR
Pag. 346

.TK
TRACKLIGHT

·20082 LUK CRUSADER | TK
Pag. 752

PHOTOMETRY

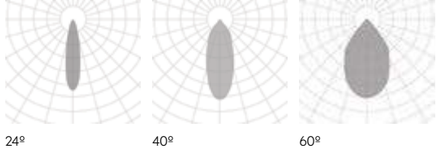

LUK HAWKEYE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20083	.01	●	LED	.24 .40 .60	.ST	.9	.27	1689	27	700	.DA .D1	
								.30	2007				
								.40	2217				

Reference order | 20083.01.TK.XX.XX.ST.9.XX.XX

LUK HAWKEYE 2	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20084	.01	●	LED	.24 .40 .60	.ST	.9	.27	4325	51	700	.DA .D1	
								.30	4565				
								.40	4706				

Reference order | 20084.01.TK.XX.XX.ST.9.XX.XX

● Select finishes



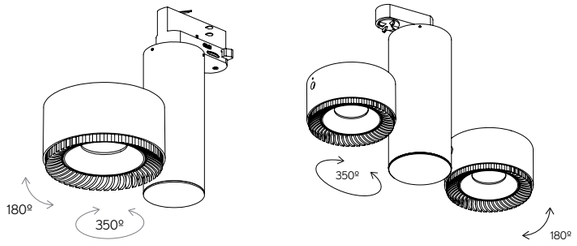

• FINISHES

COLOR

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

24º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White

.TK

TRACKLIGHT

INSTALLATIONS

LUK
HAWKEYE | HAWKEYE 2

REF 20083.TK | 20084.TK

.SR
SURFACE

·20083 HAWKEYE ·20084 HAWKEYE 2 | SR
Pag. 348

.TK
TRACKLIGHT

·20083 HAWKEYE ·20084 HAWKEYE 2 | TK
Pag. 754

PHOTOMETRY

CUBE TUBE	REF.	DIMEN-SIONS ⬟	FINISHES	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	9050	.01 185 x Ø86	●	LED	.24 .40 .60	.ST	.9	.27	567	8	350	.DA	185 Ø86
								.30	590				
								.40	592				
	9050	.02 250 x Ø86	●	LED	.24 .40 .60	.ST	.9	.27	567	8	350	.DA	250 Ø86
								.30	590				
								.40	592				
	9050	.03 350 x Ø86	●	LED	.24 .40 .60	.ST	.9	.27	567	8	350	.DA	 350 Ø86
								.30	590				
								.40	592				
	9050	.04 450 x Ø86	●	LED	.24 .40 .60	.ST	.9	.27	567	8	350	.DA	 450 Ø86
								.30	590				
								.40	592				

Reference order | 9050.XX.TK.XX.XX.ST.9.XX.XX

● Select finishes



• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02 | .03 | .04

LIGHTING OPTIONS

■ BEAM ANGLE

24º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI

▲ LIGHT DISTRIBUTION

ON DEMAND

Dim to Warm
Tunable White

INSTALLATIONS



CUBE TUBE

REF 9050.TK

.PN
PENDANT

· 9050 | 9052 CUBE TUBE | PN
Pag. 350

.TK
TRACKLIGHT

· 9050 CUBE TUBE | TK
Pag. 756

.SR
SURFACE

· 9050 | 9052 CUBE TUBE | SR
Pag. 350

PHOTOMETRY

ORACLE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	20087	.01	●	LED	.20 .40 .60	.ST	.9	.27	1079	14	500	.DA .D1	
								.30	1216				
								.40	1273				

Reference order | 20087.01TK.XX.XX.ST.9.XX.XX

● Select finishes



• FINISHES

EXTERNAL COLOR

INTERNAL COLOR

DIMENSIONS

⬟ View in family specifications

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

20º | 40º | 60º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10

▲ LIGHT DISTRIBUTION

DOWN

ON DEMAND

Dim to Warm
Tunable White

ORACLE

REF 20087.TK



INSTALLATIONS

.PN
PENDANT

·20087 ORACLE | PN
Pag. 358

.TK
TRACKLIGHT

·20087 ORACLE | TK
Pag. 758

.SR
SURFACE

·20087 ORACLE | SR
Pag. 358

PHOTOMETRY

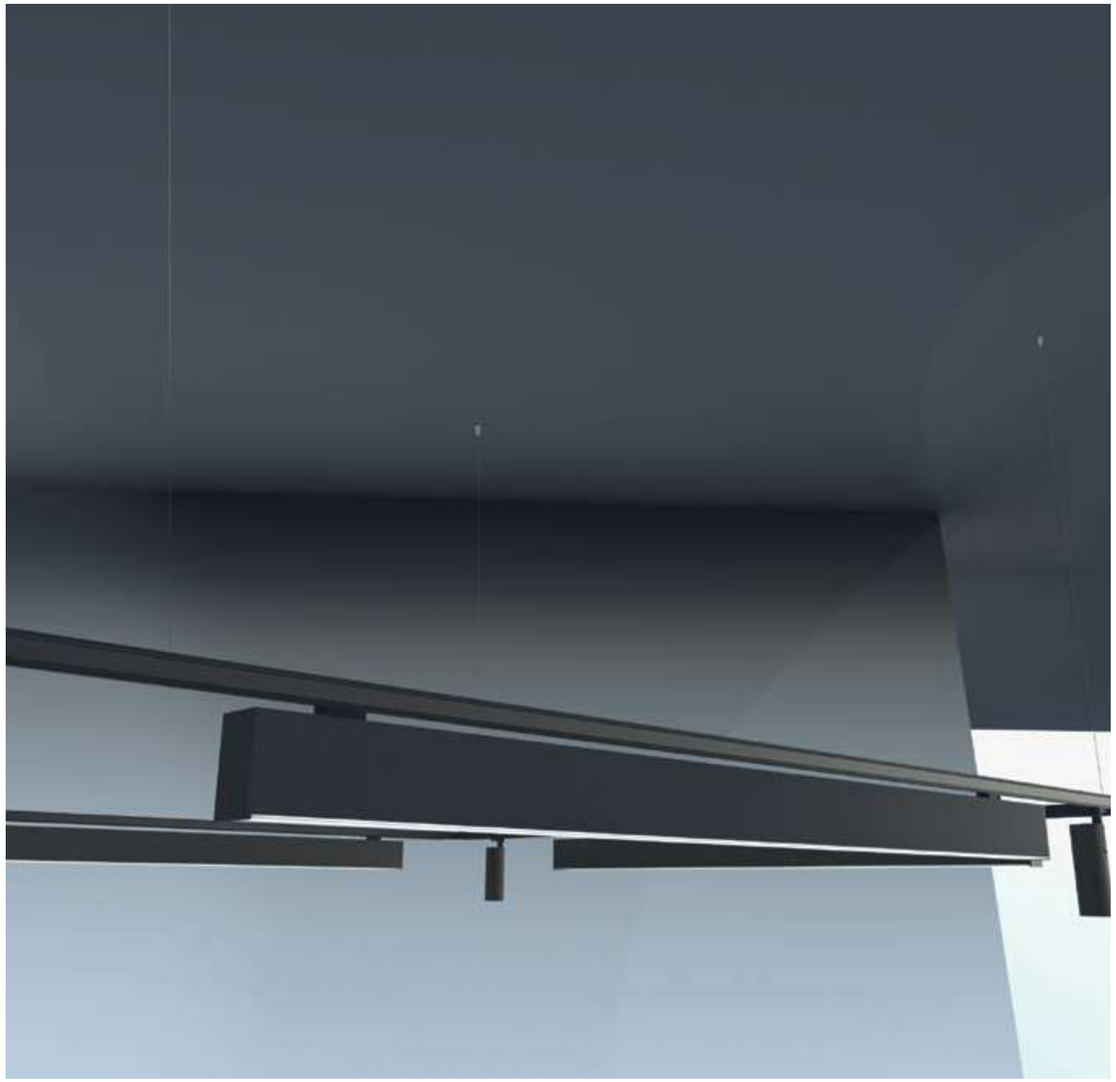

FINISHES

● COLORS

DIMENSIONS

⬟ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Track apadter
Diffuser
Electric system

new

ON DEMAND

Emergency Lighting*
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

.TK

TRACKLIGHT

INSTALLATIONS

ALBA

REF 10160.TK

.PN
PENDANT

·10160 ALBA | PN
Pag. 230

.WS
WALL SURFACE

·10160 ALBA | WS
Pag. 786

.TK
TRACK

·10160 ALBA | TK
Pag. 760

.SR
SURFACE

·10160 ALBA | SR
Pag. 230

.RF
RECESSED FRAME

·10160 ALBA | RF
Pag. 444

.TR
TRIMLESS

·10160 ALBA | TR
Pag. 644



REF.	PROFILE LENGTH ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT *2 | LUMEN .27	.30	.40	.TW *1	WATT K	TW	DIMM ▼
10160	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	
	.05	1405					3825	3975	4125	9500-9850	30	64	
	.06	1686					4590	4770	4950	11400-11820	35	76	
	.07	1967					5355	5565	5775	13300-13790	41	89	
	.08	2248					6120	6360	6600	15200-15760	47	102	

REF.	PROFILE LENGTH ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT *2 | LUMEN .27	.30	.40	WATT	DIMM ▼
10160	.03	843	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .D1
	.04	1124					6120	6356	6608	47	
	.05	1405					7650	7945	8260	59	
	.06	1686					9180	9534	9912	71	
	.07	1967					10710	11123	11564	83	
	.08	2248					12240	12712	13216	94	

Reference order | 10160.XX.TK.XX.XX.XX.X.XX.XX

Total length = Profile length + 20mm + 2x3mm (Cover kit).

COMPONENTS

COVERT KIT	REF.	FINISH
	TF02	●

Reference order | TF02.TK.XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

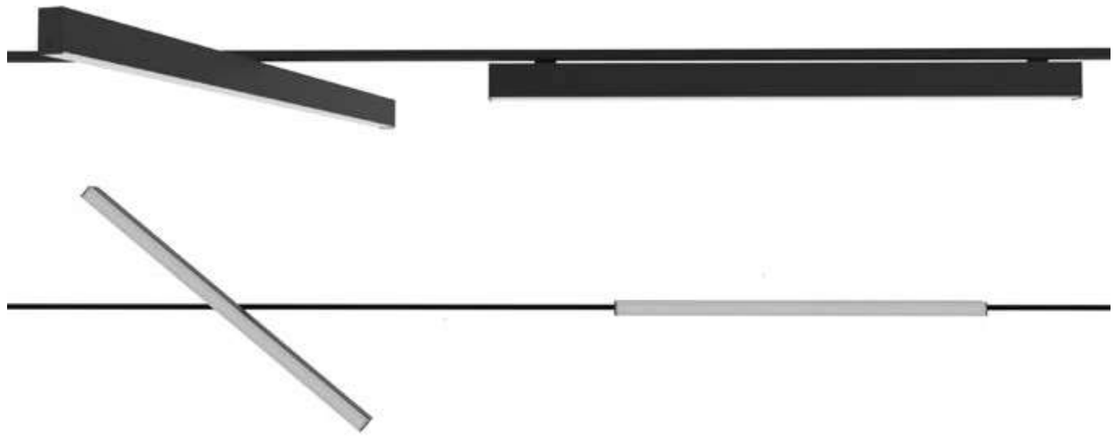

.TK

TRACKLIGHT

● Select finishes

ALBA

REF 10160.TK

PHOTOMETRY

OPAL | MICROPRISMATIC

INCLUDED

ACC.ADP

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700*mA.
*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

FINISHES

● COLORS

DIMENSIONS

⬟ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Track adapter
Diffuser
Electric system

new



ON DEMAND

Emergency Lighting*
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

.PN
PENDANT

·10178 ALBA PLUS | PN
Pag. 246

.TK
TRACK

·10178 ALBA PLUS | TK
Pag. 764

.SR
SURFACE

·10178 ALBA PLUS | SR
Pag. 246

.RF
RECESSED FRAME

·10178 ALBA PLUS | RF
Pag. 452

.TR
TRIMLESS

·10178 ALBA PLUS | TR
Pag. 652

ALUMINIUM PC · 0° · 0° · CRI ≥90 · IK06 · IP40 · LIFE 50000H · DIM OPTIONAL · INTEGRATED · INDOOR · 220-240 V 50-60 Hz · CE

ALBA PLUS

REF 10178.TK

REF.	PROFILE LENGTH ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT *2 | LUMEN .27	.30	.40	.TW *1	WATT K	TW	DIMM ▼
10178	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	5700-8520	18	38	.DA .D1
	.04	1124					3060	3180	3300	7600-11360	24	51	
	.05	1405					3825	3975	4125	9500-14200	30	64	
	.06	1686					4590	4770	4950	11400-17040	35	76	
	.07	1967					5355	5565	5775	13300-19880	41	89	
	.08	2248					6120	6360	6600	15200-22720	47	102	

REF.	PROFILE LENGTH ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT *2 | LUMEN .27	.30	.40	WATT	DIMM ▼
10178	.03	843	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .D1
	.04	1124					6120	6356	6608	47	
	.05	1405					7650	7945	8260	59	
	.06	1686					9180	9534	9912	71	
	.07	1967					10710	11123	11564	83	
	.08	2248					12240	12712	13216	94	

Reference order | 10178.XX.TK.XX.XX.XX.X.XX.XX

Total length = Profile length + 20mm + 2x3mm (Cover kit)

COMPONENTS

COVERT KIT	REF.	FINISH
	TF01	●

Reference order | TF01.TK.XX ●

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

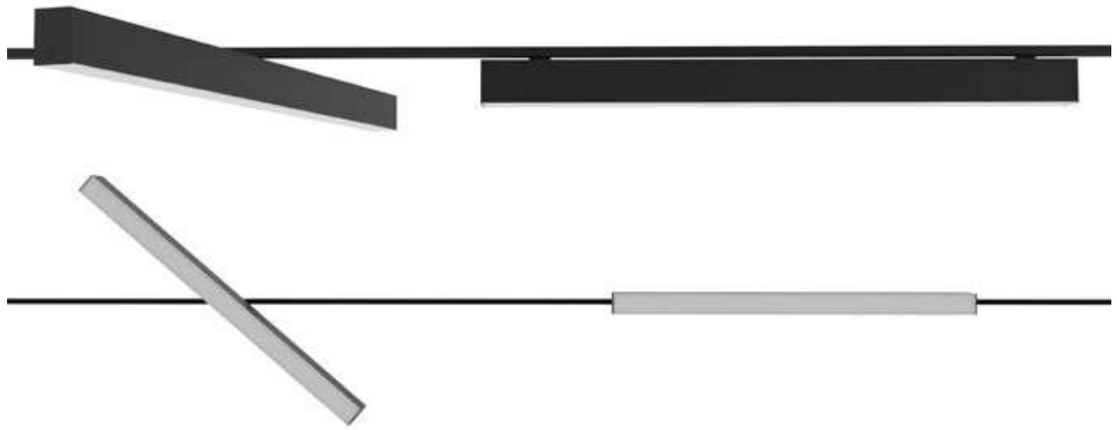

.TK

TRACKLIGHT

● Select finishes

ALBA PLUS

REF 10178.TK

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED

ACC.ADP

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700*mA.

*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

3-CIRCUIT TRACK	REF	DIMENSIONS ⬟	INST. ■	FINISH ●	DIMM. ▼	SKETCH
	ACC6684	.01 1000 .02 2000	.RF	.BK-BK .GY-GY .WH-WH	.DA	
			.SR*			

* Add pendant mounting to track profile ACC6684.01.SR & ACC6684.02.SR with accesories ACC6666 + ACC6665.
Añadir instalación colgante al perfil track ACC6684.01.SR & ACC6684.02.SR *con los accesorios* ACC6666 + ACC6665.

Reference order | ACC6684.XX.XX.XX.XX

L-CORNER ADJUSTABLE	REF	FINISH ●	DIMM. ▼
	ACC6660	.BK-BK .GY-GY .WH-WH	.DA

Reference order | ACC6660.XX.XX

L-CORNER	REF	FINISH ●	DIMM. ▼
	ACC6659	.BK-BK .GY-GY .WH-WH	.DA

Reference order | ACC6659.XX.XX

T-ANGLE	REF	FINISH ●	DIMM. ▼
	ACC6661	.BK-BK .GY-GY .WH-WH	.DA

Reference order | ACC6661.XX.XX

X-ANGLE	REF	FINISH ●	DIMM. ▼
	ACC6662	.BK-BK .GY-GY .WH-WH	.DA

Reference order | ACC6662.XX.XX

MIDDLE FEED	REF	FINISH ●	DIMM. ▼
	ACC6681	.BK-BK .GY-GY .WH-WH	.DA

Reference order | ACC6681.XX.XX

MIDDLE FEED	REF	FINISH ●	DIMM. ▼
	ACC6682	.BK-BK .GY-GY .WH-WH	.DA

Reference order | ACC6682.XX.XX

POWER SUPPLY	REF	FINISH ●	DIMM. ▼
	ACC6656	.BK-BK .GY-GY .WH-WH	.DA

Reference order | ACC6656.XX.XX

DALI ADAPTER	REF	FINISH ●
	ACC6685	.BK-BK .GY-GY .WH-WH

Reference order | ACC6685.XX

CONNECTOR COVER L	REF	FINISH ●
	ACC6687	.BK-BK .GY-GY .WH-WH

Reference order | ACC6687.XX

CONNECTOR COVER T	REF	FINISH ●
	ACC6686	.BK-BK .GY-GY .WH-WH

Reference order | ACC6686.XX

CONNECTOR COVER X	REF	FINISH ●
	ACC6664	.BK-BK .GY-GY .WH-WH

Reference order | ACC6664.XX

TRACK COVER STRIP 3M	REF	FINISH ●
	ACC6688	.BK-BK .WH-WH

Reference order | ACC6688.XX

BRACKET FOR PENDANT INST.	REF	FINISH ●
	ACC6665	.BK-BK .GY-GY .WH-WH

Reference order | ACC6665.XX

SUSPENSION KIT 5M	REF	FINISH ●
	ACC6666	.BK-BK .GY-GY .WH-WH

Reference order | ACC6666.XX

END CAP SR	REF	FINISH ●
	ACC6663	.BK-BK .GY-GY .WH-WH

Reference order | ACC6663.SR.XX

END CAP RF	REF	FINISH ●
	ACC6689	.BK-BK .GY-GY .WH-WH

Reference order | ACC6689.RF.XX

TOOL FOR ADAPTER WIRING	REF
	ACC6690

Reference order | ACC6690.XX

END CAP SR	REF	FINISH ●
	ACC6671	.BK-BK .WH-WH

Reference order | ACC6671.XX

THREADED ROD M6	TUBE FOR ROD	NUT M6	
ACC6667	ACC6669	EXTENSION NUT M6	ACC6668
		NUT THREADED ROD M6	ACC6670

TK ACCESORIES

WALL SURFACE

VISUAL INDEX

WALL LIGHTS

HURY

10251 PAG. 772

GLIM

410004 PAG. 774

KUU

410014 PAG. 776

KAPI

9000 PAG. 778

IKI

9011 PAG. 780

OKUMA

8105 PAG. 782

ELENA

8106 PAG. 784

ALBA

ALBA

10160 PAG. 786

ALBA DOUBLE

10215 PAG. 790

ALBA ASIMETRIC

210009 PAG. 794

ACOUSTIC

ACOUSTIC ALZIRA

230002 PAG. 798

ACOUSTIC ACCESORIES

AC.FL PAG. 802

WALL

CRISMOSIL

WALL METIS

10098 PAG. 806

CRISMOSIL

WALL ELARA

10097 PAG. 808

CRISMOSIL

WALL TEBE

10096 PAG. 810

CRISMOSIL

WALL LEDA

10051 PAG. 812

CRISMOSIL

WALL ARCE

10055 PAG. 814

CRISMOSIL

WALL CARPO

10059 PAG. 816

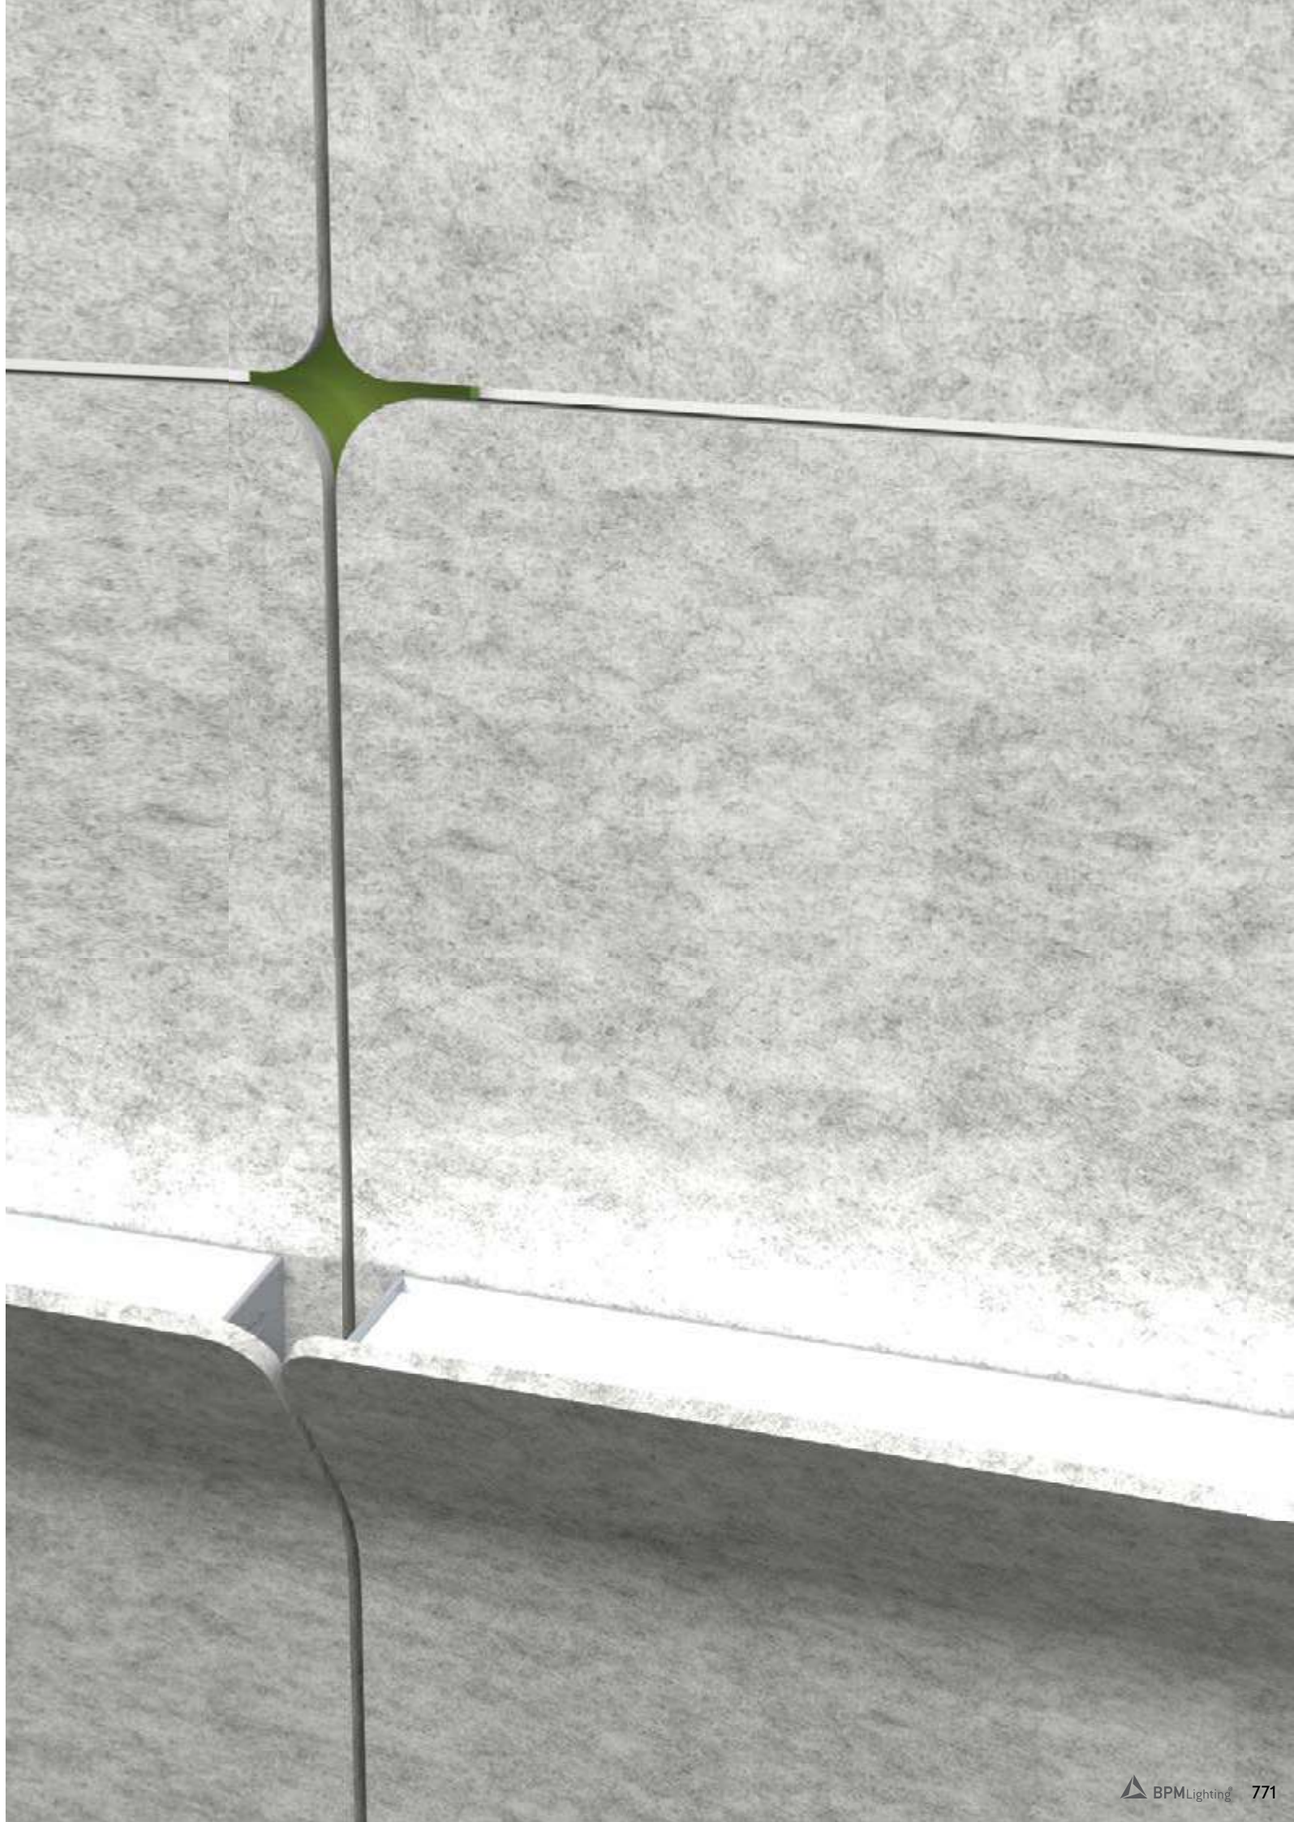

HURY	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM *1 ▼	SKETCH
	10251	.01	.WH-WH .BK-BK	LED	.OP	.ST	.9	.30	1451	12	24	.DA .PU .D1	320
	10251	.02	.WH-WH .BK-BK	LED	.OP	.ST	.9	.30	2358	19	24	.DA .PU .D1	520
	10251	.03	.WH-WH .BK-BK	LED	.OP	.ST	.9	.30	3265	26	24	.DA .PU .D1	720

Reference order | 10251.XX.WS.XX.OP.ST.9.30.XX

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

320 | 520 | 720

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

3000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

ADJUSTABLE

LUMINAIRE INCLUDES

Wall surface mounting kit

new



WALL SURFACE

INSTALLATIONS

HURY

REF 10251.WS

.WS
WALL SURFACE

10251 HURY | WS
Pag. 772

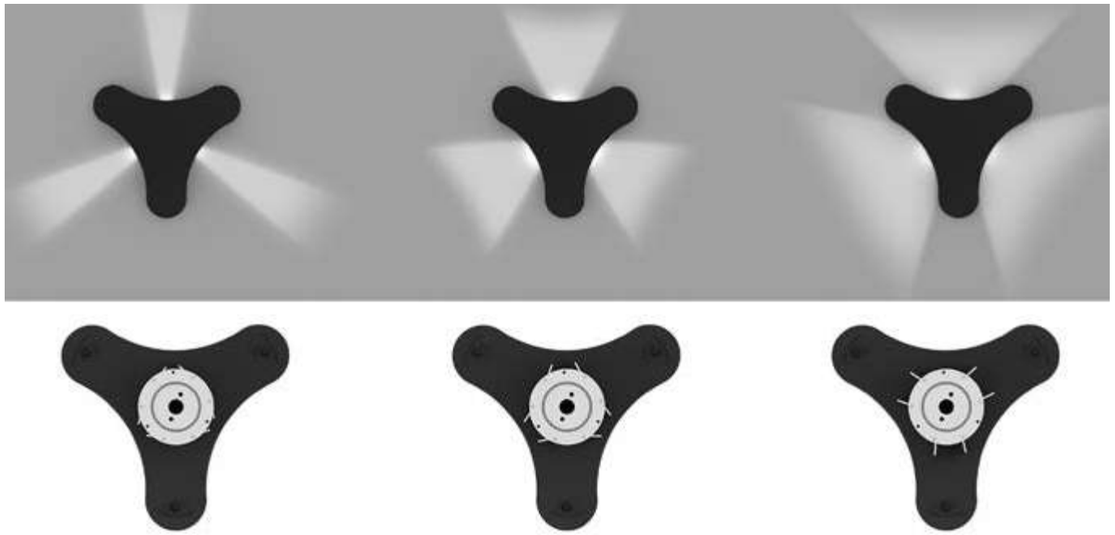

GLIM	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POW-ER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	410004	.01	.WH-WH .BK-BK	LED	.OP	.ST	.9	.30	400	8	300	-	

Reference order | 410004.01.WS.XX.OP.ST.9.30

FINISHES

● COLORS

DIMENSIONS

⬟ SIZES

.01

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

3000K

▼ DIMMABLE OPTIONS

-

▲ LIGHT DISTRIBUTION

SIDE

LUMINAIRE INCLUDES

Wall surface mounting kit

new

WALL SURFACE

INSTALLATIONS

GLIM

REF 410004.WS

.WS
WALL SURFACE

410004 GLIM | WS
Pag. 774

KUU	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POW-ER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	410014	.01	.WH-WH .BK-BK	LED	.OP	.ST	.9	.30	580	12	100	-	

Reference order | ⬟ ● ■ 410014.01.WS.XX.OP.ST.9.30

FINISHES

● COLORS

□ ■

DIMENSIONS

⬟ SIZES

.01

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

3000K

▼ DIMMABLE OPTIONS

-

▲ LIGHT DISTRIBUTION

UP - DOWN

LUMINAIRE INCLUDES

Wall surface mounting kit

new

WALL SURFACE

INSTALLATIONS

KUU

REF 410014.WS

.WS
WALL SURFACE

410014 KUU | WS
Pag. 776

KAPI	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POW-ER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	9000	.01	.WH-WH	LED	.OP	.ST	.9	.30	250	3	350	-	50 / 150 / 150
	9000	.02	.WH-WH	LED	.OP	.ST	.9	.30	500	5	350	-	50 / 300 / 150
	9000	.03	.WH-WH	LED	.OP	.ST	.9	.30	1000	11	350	-	50 / 500 / 150

Reference order | 9000.XX.WS.XX.OP.ST.9.30.XX

FINISHES

● COLORS

□

DIMENSIONS

⬟ LENGTHS mm.

150 | 300 | 500

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

3000K

▼ DIMMABLE OPTIONS

-

▲ LIGHT DISTRIBUTION

UP - DOWN

LUMINAIRE INCLUDES

Wall surface mounting kit

ALUMINIUM PC | 0° | 0° | CRI ≥90 | IK06 | IP20 | LIFE 50000H | DIM OPTIONAL | INTEGRATED | INDOOR | 220-240 V 50-60 Hz | CE

KAPI

REF 9000.WS

.WS
WALL SURFACE

9000 KAPI | WS
Pag. 778

IKI	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	9011	**.01**	**.WH-WH**	**LED**	**.OP**	**.ST**	**.9**	**.30**	120	6	300	-	

Reference order | 9011.01.WS.XX.OP.ST.9.XX

FINISHES

● COLORS

□

DIMENSIONS

⬟ SIZES

.01

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

80

COLOR TEMPERATURE

3000K

▼ DIMMABLE OPTIONS

-

▲ LIGHT DISTRIBUTION

UP - DOWN

LUMINAIRE INCLUDES

Wall surface mounting kit

INSTALLATIONS

IKI

REF 9011.WS

.WS
WALL SURFACE

9011 IKI | WS
Pag. 780

OKUMA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	8105	.01	.WH-WH .BK-BK .SA-SA	LED	.OP	.ST	.9	.27	130	3	700	-	
								.30	140				
								.40	150				

Reference order | 8105.01.WS.XX.OP.ST.9.XX

FINISHES

● COLORS

DIMENSIONS

⬟ SIZES

.01

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

-

▲ LIGHT DISTRIBUTION

ADJUSTABLE

LUMINAIRE INCLUDES

Wall surface mounting kit

WALL SURFACE

INSTALLATIONS

OKUMA

REF 8105.WS

.WS
WALL SURFACE

8105 OKUMA | WS
Pag. 782

ELENA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POW-ER	CRI	K	LUMEN	WATT	mA	DIMM * ▼	SKETCH
	8106	.01	.WH-WH .BK-BK	LED	.OP	.ST	.8	.30	269	3	700	-	

Reference order | 8106.01.WS.XX.OP.ST.9.30

FINISHES

● COLORS

□ ■

DIMENSIONS

⬟ SIZES

.01

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

80

COLOR TEMPERATURE

3000

▼ DIMMABLE OPTIONS

-

▲ LIGHT DISTRIBUTION

AJUSTABLE

LUMINAIRE INCLUDES

Wall surface mounting kit

.WS

WALL SURFACE

INSTALLATIONS

ELENA

REF 8106.WS

.WS
WALL SURFACE

8106 ELENA | WS
Pag. 784

FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

307 | 447 | 588

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Wall surface mounting kit
Cover Kit

ON DEMAND

Emergency Lighting*
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

ALBA

REF 10160.WS

.PN
PENDANT

·10160 ALBA | PN
Pag. 230

.WS
WALL SURFACE

·10160 ALBA | WS
Pag. 786

.TK
TRACK

·10160 ALBA | TK
Pag. 760

.SR
SURFACE

·10160 ALBA | SR
Pag. 230

.RF
RECESSED FRAME

·10160 ALBA | RF
Pag. 444

.TR
TRIMLESS

·10160 ALBA | TR
Pag. 644



REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
10160	.01	307	●	.OP .MP	.ST	.9	765	795	825	1900-1970	6	13	.DA .PU .D1
	.02	447					1148	1193	1238	2850-2955	9	19,5	
	.03	588					1530	1590	1650	3800-3940	12	26	

REF.	DIMENSION ⬟	MM	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
10160	.01	307	●	.OP .MP	.HI	.9	1530	1589	1652	12	.DA .PU .D1
	.02	447					2295	2384	2478	18	
	.03	588					3060	3178	3304	24	

Reference order | 10160.XX.WS.XX.XX.XX.9.XX.XX

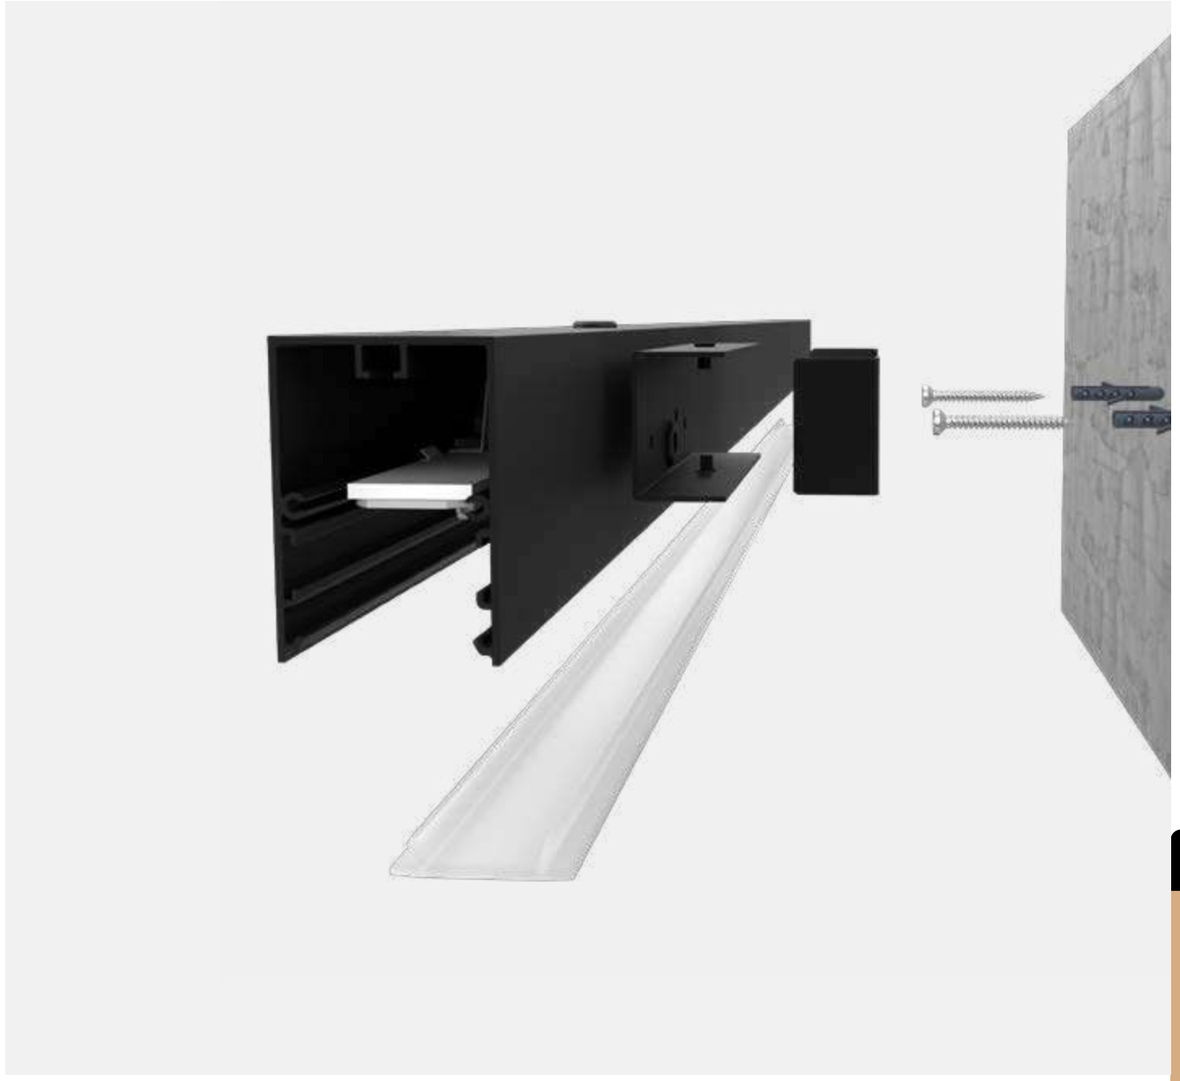

WALL SURFACE

- Select finish



ALBA

REF 10160.WS

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED



COVER KIT WALL SURFACE MOUNTING KIT

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700*mA.
*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

327 | 468 | 608

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

UP - DOWN

LUMINAIRE INCLUDES

Wall surface mounting kit
Cover Kit

ON DEMAND

Emergency Lighting*
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80
HI power

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

ALBA
DOUBLE

REF 10215.WS

.PN
PENDANT

·10215 ALBA DOUBLE | PN
Pag. 238

.WS
WALL SURFACE

·10215 ALBA DOUBLE | WS
Pag. 790

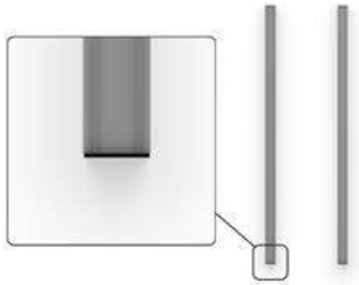

REF.	DIMENSION ⬟	MM	FINISH	DIFFUS-ER ■	POWER	CRI	DOWNLIGHT *2 | LUMEN .27	.30	.40	.TW *1	WATT K	TW	UPLIGHT *2 | LUMEN .27	.30	.40	.TW *1	WATT K	TW	DIMM ▼
10215	.01	327	●	.OP .MP	.ST	.9	725	795	825	1900-1970	18	38	725	795	825	1900-1970	18	38	.DA .PU .D1
	.02	468					1088	1193	1238	2850-2955	27	57	1088	1193	1238	2850-2955	27	57	
	.03	608					1450	1590	1650	3800-3940	36	76	1450	1590	1650	3800-3940	36	76	

Reference order | 10215.XX.WS.XX.XX.ST.9.XX.XX

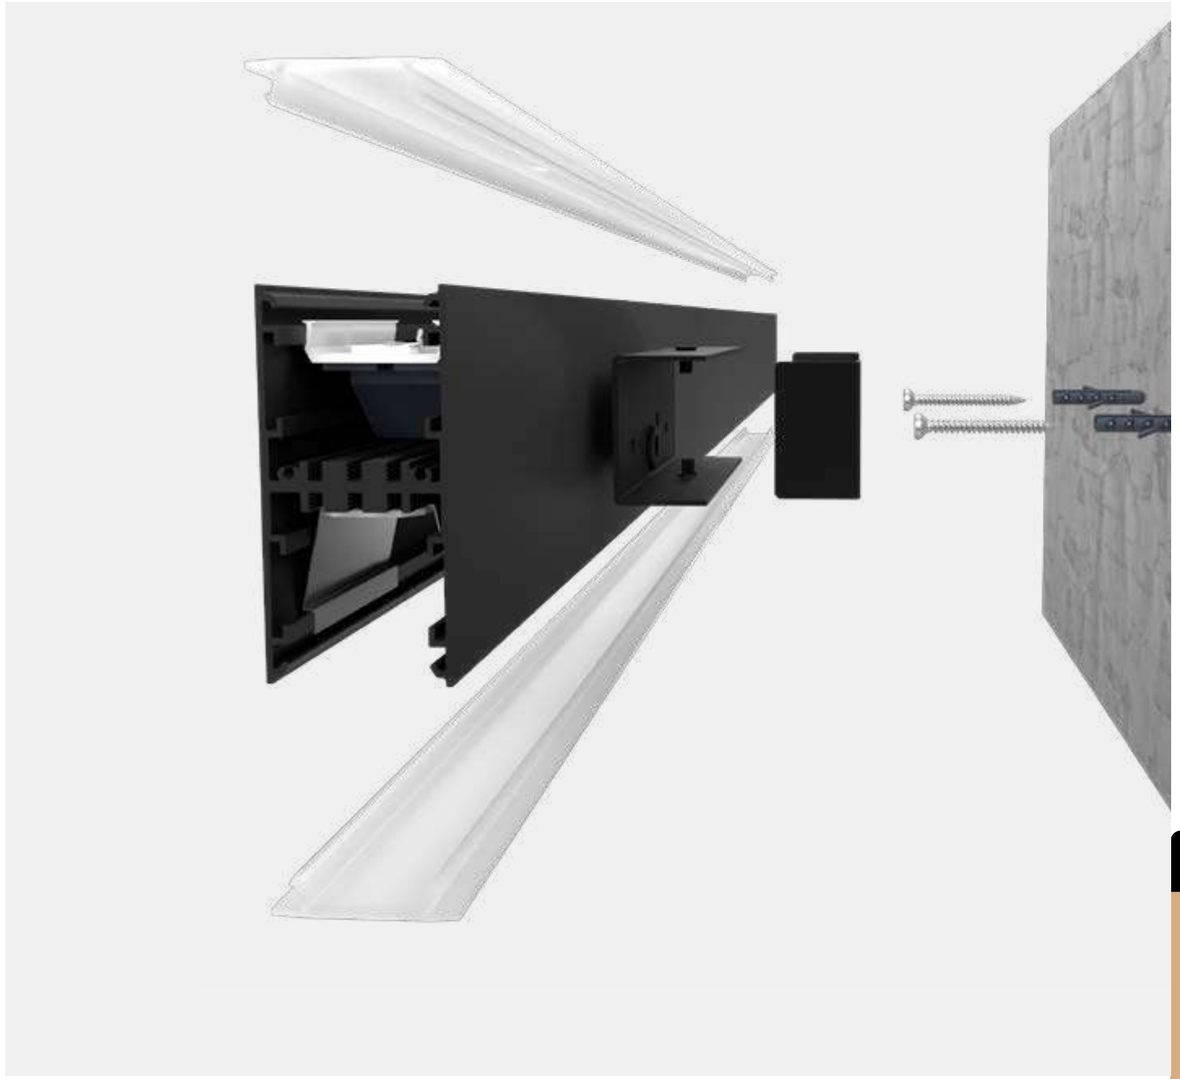

WALL SURFACE

.WS

- Select finish

ALBA DOUBLE

REF 10215.WS

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED



COVER KIT WALL SURFACE MOUNTING KIT

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700mA.*

*2 Down light (direct light) and up light (.UP) work at 500mA. *La luz directa e indirecta (.UP) trabaja a 500mA.*

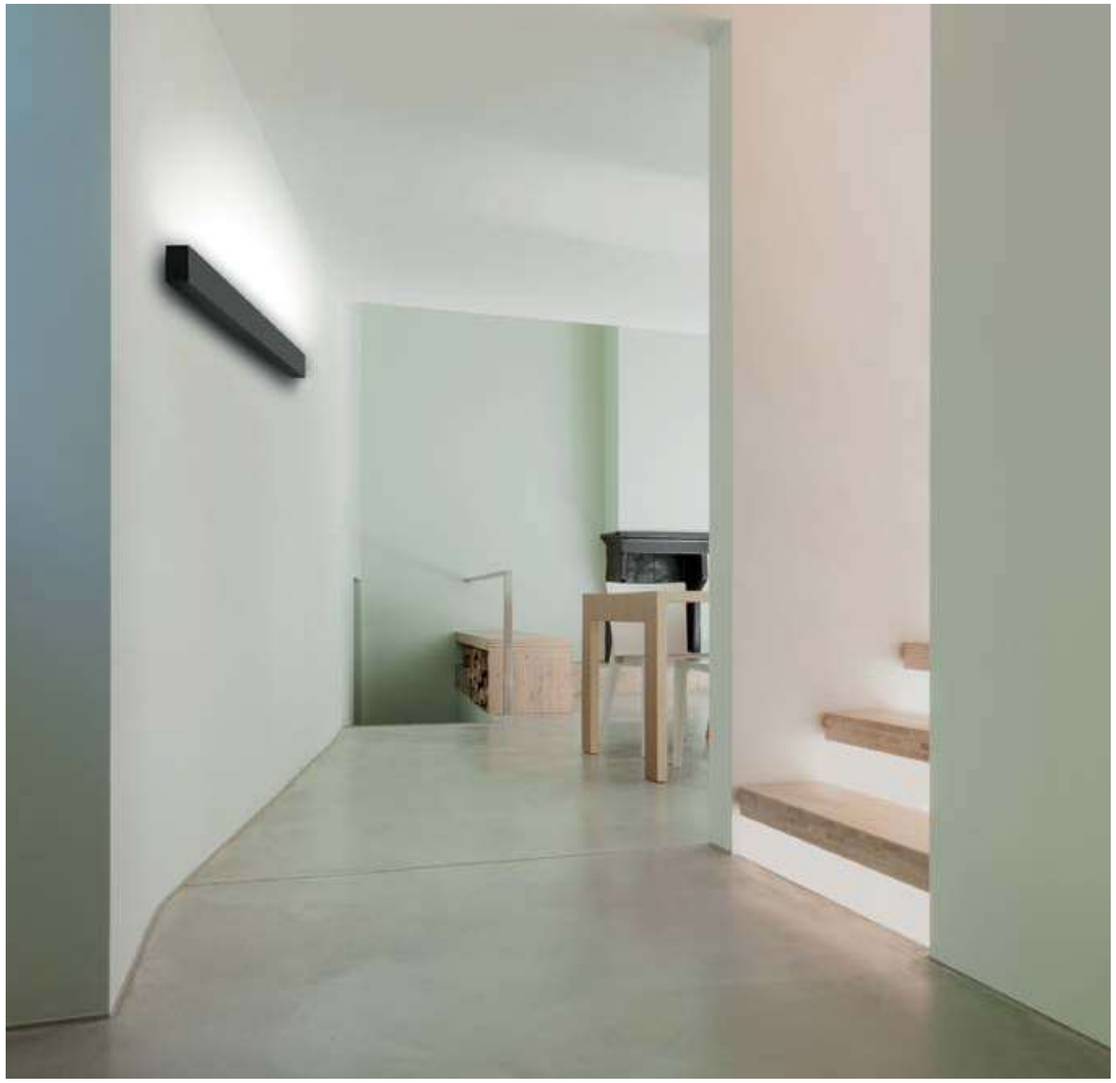

FINISHES

● EXTERNAL COLOR

INTERNAL COLOR

⬟ LENGTHS mm.

307 | 447 | 588

LIGHTING OPTIONS

■ DIFFUSERS

TRANSPARENT

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

ASYMETRIC DOWN

LUMINAIRE INCLUDES

Wall surface mounting kit
Cover Kit

ON DEMAND

Emergency Lighting*
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

.WS
WALL SURFACE

INSTALLATIONS

ALBA
ASIMETRIC

REF 210009.WS

.PN
PENDANT

·210009 ALBA ASIMETRIC
| PN - Pag. 242

.WS
WALL SURFACE

·210009 ALABA ASIMETRIC
| WS - Pag. 794

.SR
SURFACE

·210009 ALBA ASIMETRIC
| SR - Pag. 242

.RF
RECESSED FRAME

·210009 ALBA ASIMETRIC
| RF - Pag. 448

.TR
TRIMLESS

·210009 ALBA ASIMETRIC
| TR - Pag. 648



REF.	DIMENSION ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	.TW*2	WATT K	TW	DIMM ▼
210009	.01	307	●	.TP	.ST	.9	765	795	825	1900-1970	6	13	.DA .PU .D1
	.02	447					1148	1193	1238	2850-2955	9	20	
	.03	588					1530	1590	1650	3800-3940	12	26	

REF.	DIMENSION ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
210009	.01	307	●	.TP	.HI	.9	1530	1589	1652	12	.DA .PU .D1
	.02	447					2295	2384	2478	18	
	.03	588					3060	3178	3304	24	

Reference order | 210009.XX.WS.XX.XX.XX.9.XX.XX

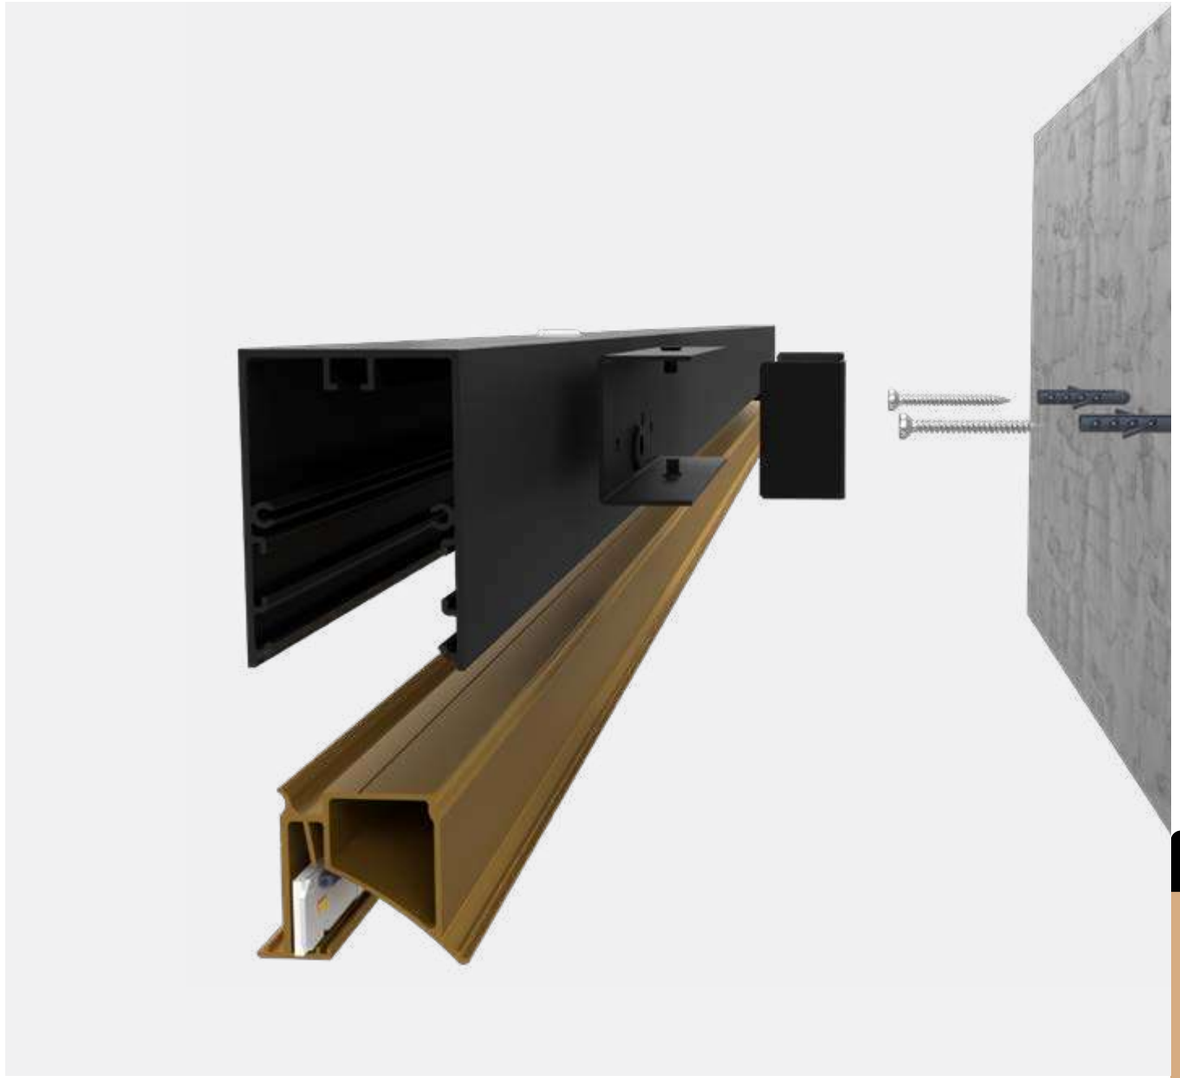

WALL SURFACE

- Select finish

ALBA
ASIMETRIC

REF 210009.WS

PHOTOMETRY

TRANSPARENT PC

INCLUDED

COVER KIT



WALL SURFACE MOUNTING KIT

PROFILE



*1 Tunable White (.TW) values correspond to 2700K and 6500K - .TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. *Los valores del blanco dinámico (.TW) corresponden a 2700K y 6500K. -.TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700*mA.
*2 Down light (direct light) works at 500mA. *La luz directa trabaja a 500mA.*

FINISHES

● COLORS

DIMENSIONS

⬟ LENGTHS mm.

307 | 447 | 588

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

UP

LUMINAIRE INCLUDES

Wall surface mounting kit
Cover Kit

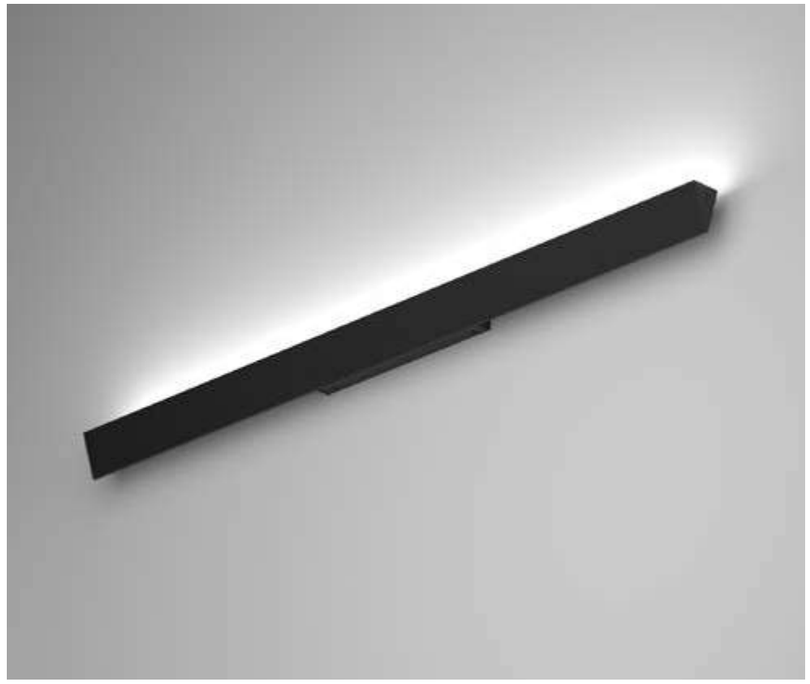

ON DEMAND

Emergency Lighting *
Motion Detection
Well-Certified LED Boards
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

ALZIRA

REF 10169.WS

.PN
PENDANT

·10169 ALZIRA | PN
Pag. 266

.WS
WALL SURFACE

·10169 ALZIRA | WS
Pag. 798



REF.	DIMENSION ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
10169	.01	307	●	.OP .MP	.ST	.9	765	795	825	6	.DA .PU .D1
	.02	447					1148	1193	1238	9	
	.03	588					1530	1590	1650	12	

REF.	DIMENSION ⬟	MM	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT | LUMEN .27	.30	.40	WATT	DIMM ▼
10169	.01	307	●	.OP .MP	.HI	.9	1530	1589	1652	12	.DA .PU .D1
	.02	447					2295	2384	2478	18	
	.03	588					3060	3178	3304	24	

Reference order | 10169.XX.WS.XX.XX.XX.9.XX.XX

● Select finish

.WH-WH .BK-BK .GC-GC .BM-BM .BS-BS .BC-BC .CR-CR .CB-CB .GY-GY .MG-MG .VC-VC .YM-YM

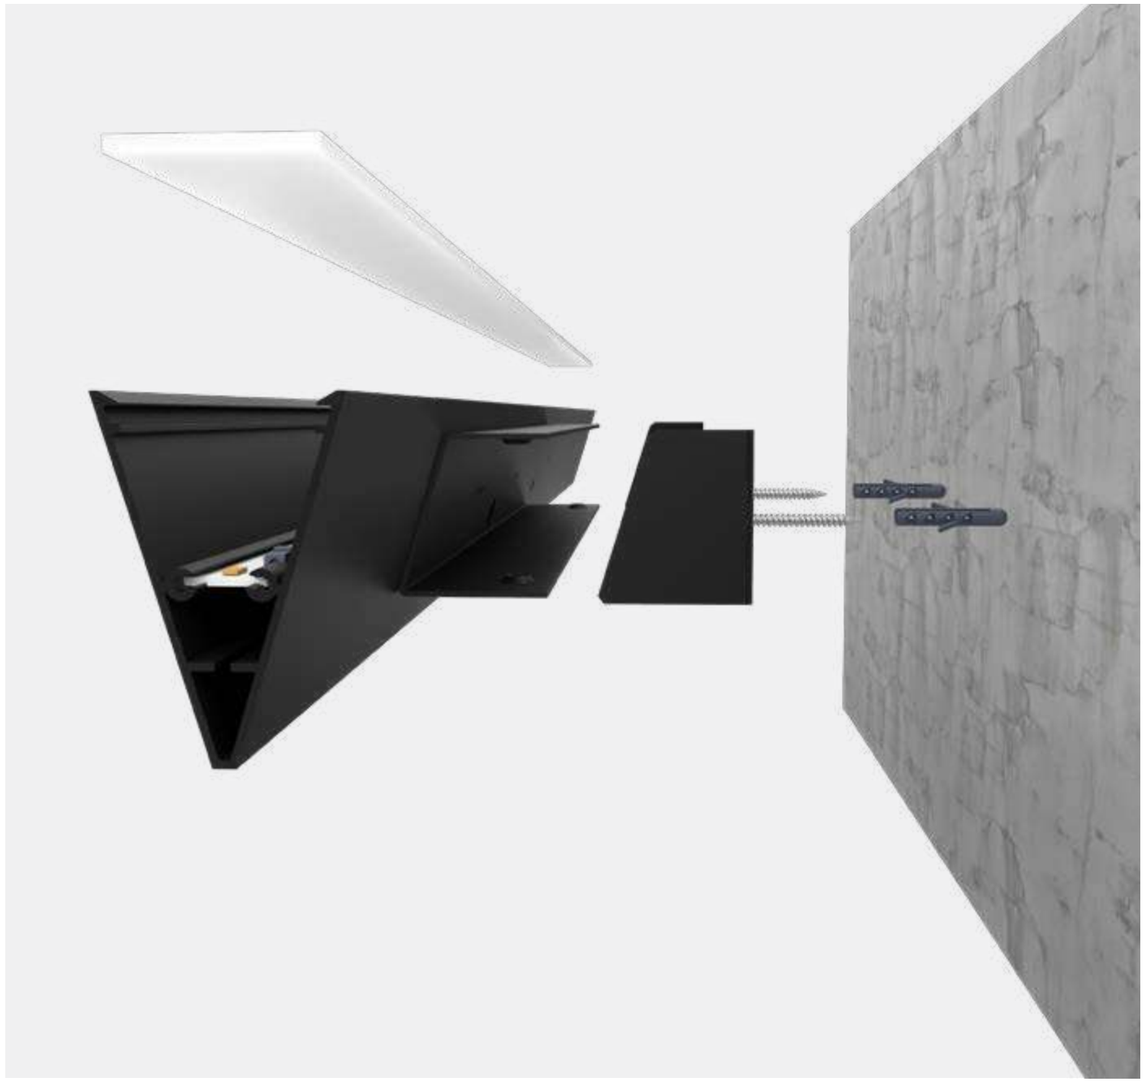

ALUMINIUM PC · 0° · 0° · CRI ≥90 · IK06 · IP40 · LIFE 50000H · DIM OPTIONAL · INTEGRATED · INDOOR · 220-240 V 50-60 Hz

ALZIRA

REF 10169.WS

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED

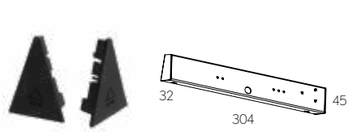

COVER KIT WALL SURFACE MOUNTING KIT

PROFILE



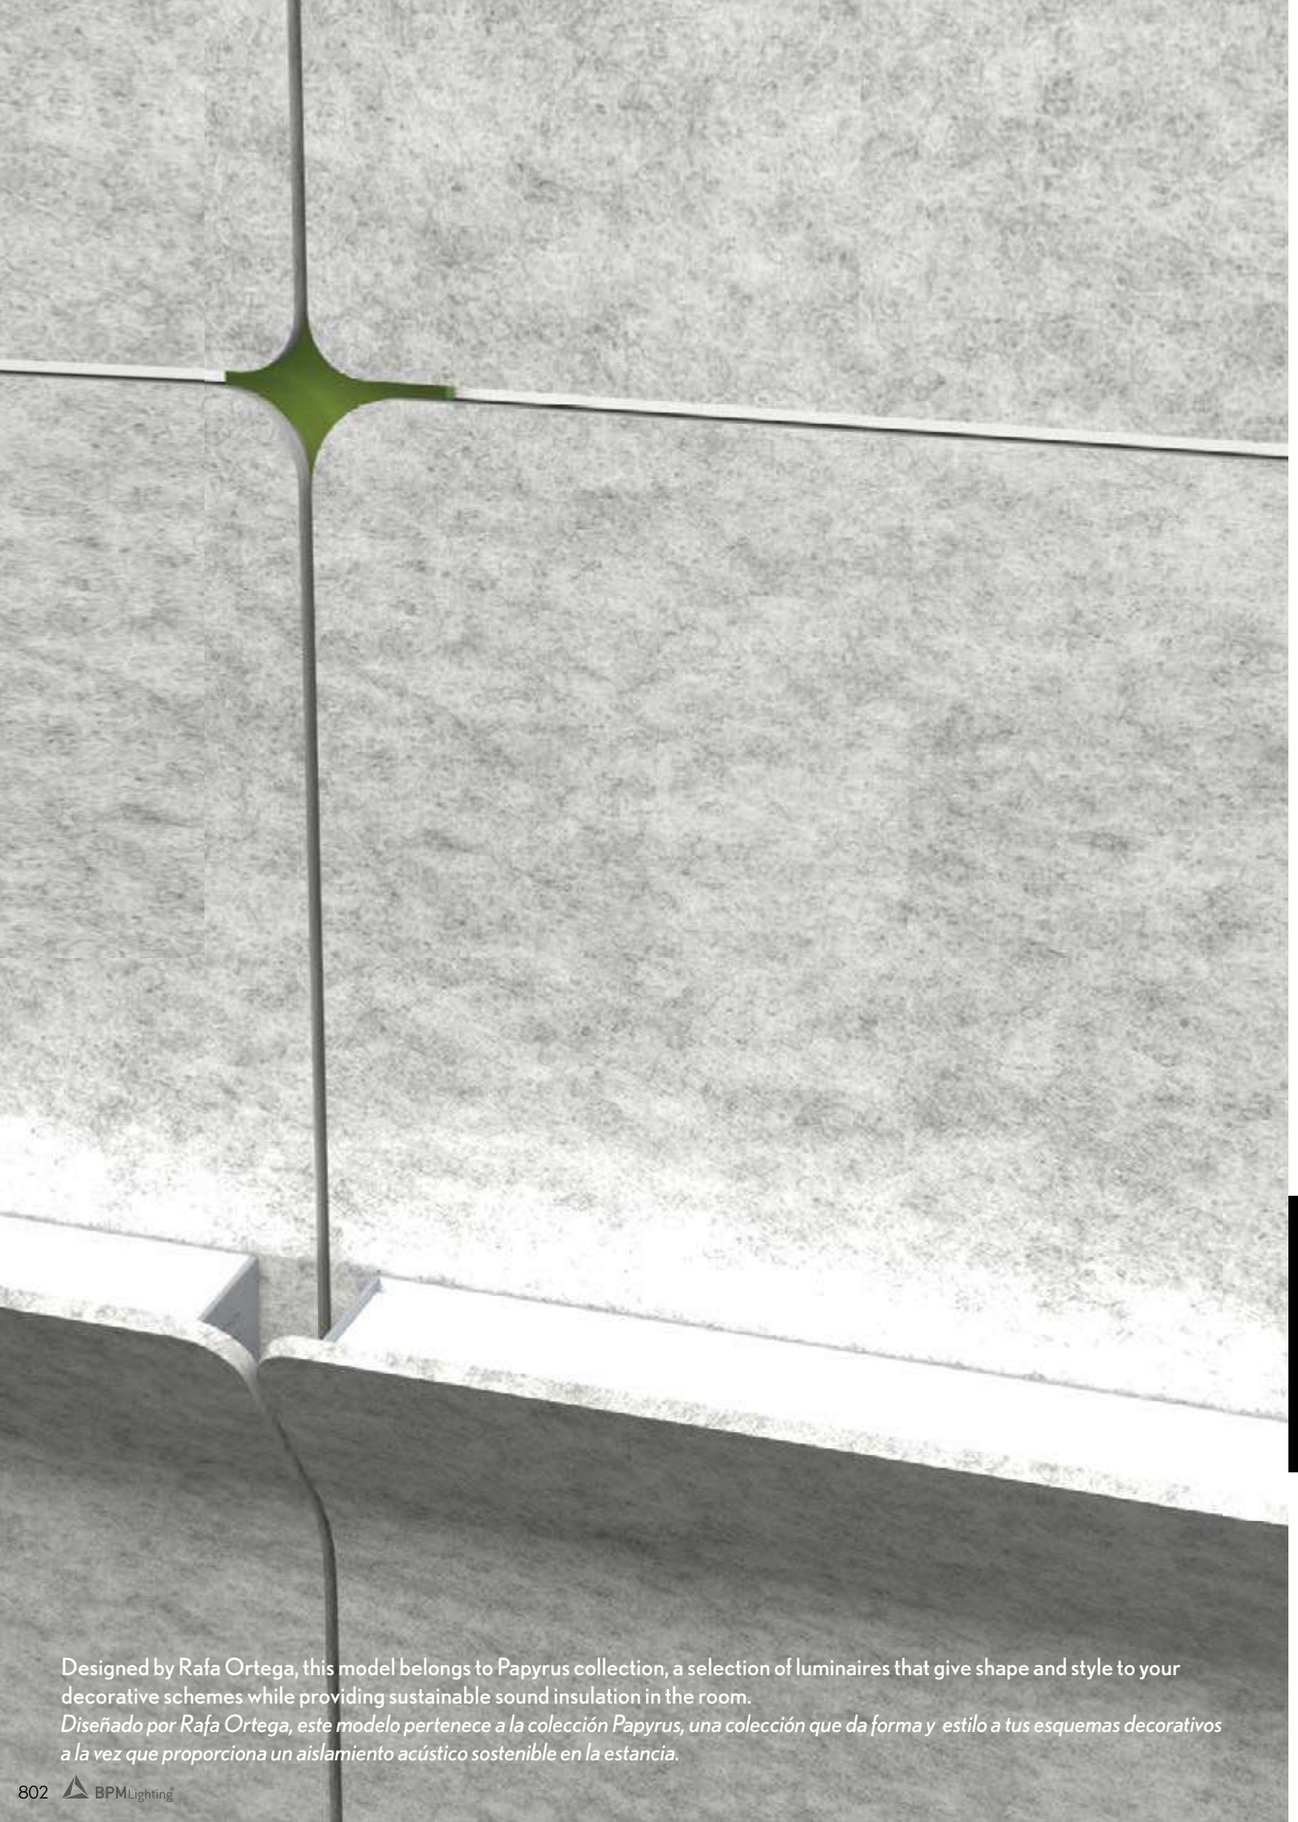

Designed by Rafa Ortega, this model belongs to Papyrus collection, a selection of luminaires that give shape and style to your decorative schemes while providing sustainable sound insulation in the room.
Diseñado por Rafa Ortega, este modelo pertenece a la colección Papyrus, una colección que da forma y estilo a tus esquemas decorativos a la vez que proporciona un aislamiento acústico sostenible en la estancia.

FINISHES

● ACOUSTIC COLORS

● PROFILE COLORS

DIMENSIONS

⬟ LENGTHS mm.

1200

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

Up

LUMINAIRE INCLUDES

Wall surface mounting kit
Cover Kit

new

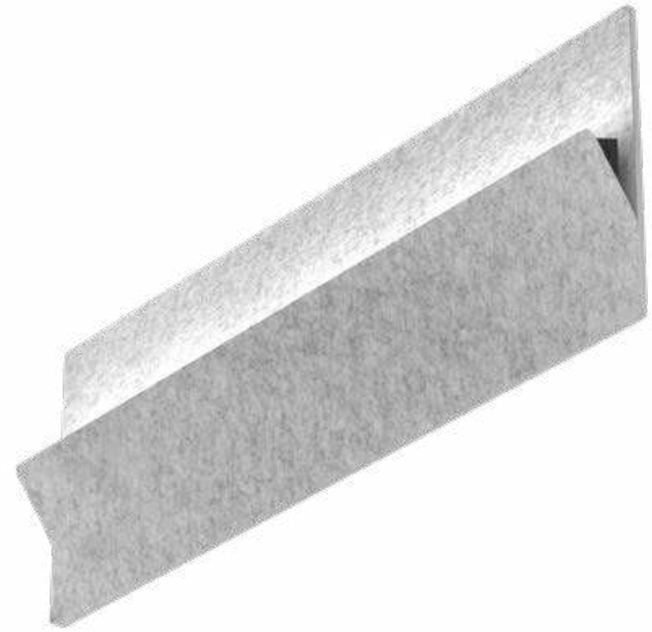

ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

WALL SURFACE

ACOUSTIC ALZIRA WS

Designed by Rafa Ortega

REF 230002.WS

REF.	DIMENSION ⬟	FINISH ●		DIFFUSER ■	POWER	CRI	DOWNLIGHT * | LUMEN .27	.30	.40	WATT K	TW	DIMM ▼
230002	**.01** 1200mm	**.50** **.51**	**WH** **BK**	**.OP** **.MP**	.ST	.9	3060	3180	3300	24	51	**.DA** **.PU** **.D1**

Reference order | 230002.01.WS.XX-XX.XX.XX.9.XX.XX

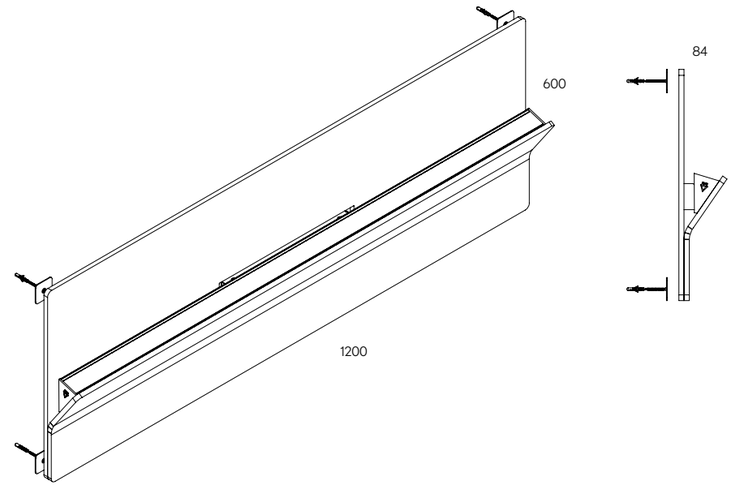

- Select Acoustic finishes



.50 .51

- Select Profile finishes

.WH .BK

ACOUSTIC ALZIRA WS

Designed by Rafa Ortega

REF 230002.WS

ACOUSTIC PROPERTIES

ENVIRONMENTAL:	Comply with the requirements detailed in the BREEAM International, BREEAM-NOR v6.0 and LEED v4.1. Standards
FIRE TEST:	Classification B-s1, d0 and CTEDB-SI Compliant
BAFFLE THIKNESS:	12mm
BABBLE DENSITY:	190 Kg/m^3
SOUND ABSORPTION COEFFICIENT:	0,92 αw

PHOTOMETRY



OPAL MICROPRISMATIC

INCLUDED

COVERT KIT

PROFILE



new

FINISHES

- ACOUSTIC COLORS

DIMENSIONS

- SIZES mm.

Ø800	Ø1000	Ø1200
800x800	1000x1000	1200x1200

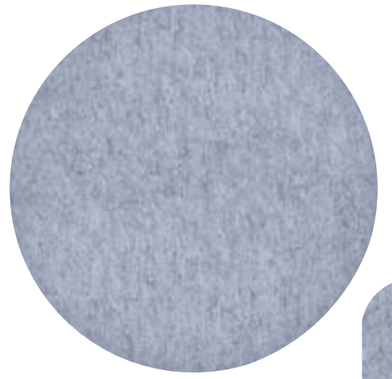



.WS



.WS

RD PANEL	REF.	DIMENSION ⬟	FINISH	SKETCH
	AC.RD	.01	●	Ø800
		.02		Ø1000
		.03		Ø1200

Reference order AC.RD.XX.WS.XX

SQ PANEL	REF.	DIMENSION ⬟	FINISH	SKETCH
	AC.SQ	.01	●	800x800
		.02		1000x1000
		.03		1200x1200

Reference order AC.SQ.XX.WS.XX

WALL SURFACE

ACOUSTIC ACCESORIES
RD | SQ PANEL

REF AC.RD | AC.SQ

Ø800mm

800x800mm

Ø1000mm

1000x1000mm

Ø1200mm

1200x1200mm

new

FINISHES

- COLORS

DIMENSIONS

- DIAMETERS mm.

300x1200	600x1200



.WS

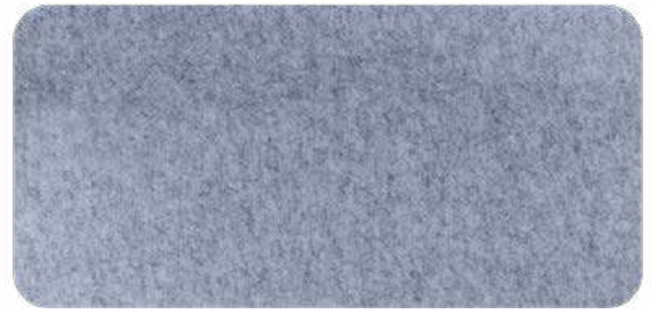

FL PANEL	REF.	DIMENSION ⬟	FINISH	SKETCH
	AC.FL	.01	●	300 / 1200
		.02		600 / 1200

Reference order | AC.FL.XX.WS.XX

WALL SURFACE

ACOUSTIC ACCESORIES
FL PANEL

REF AC.FL

300 x 1200mm

600 x 1200mm

WALL METIS	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10098	.01	●	GU5.3		GU5.3	-			8	-		
				GU10	.GU	GU10							
				LED	.40 .60	.ST BPM50	.9	.27	526	8	350	.DA .PU .D1	
								.30	570				
								.40	711				
						.HI BPM300		.27	707	10	500		
								.30	927				
								.40	767				

With opal optic cover.
Con difusor opal.

LUMINAIRE INCLUDES

Wall surface mounting kit

Reference order | 10098.01.WS.XX.XX.XX.X.XX.XX

• FINISHES

⬟ DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE / LAMP

40º | 60º | GU5.3 | GU10

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

UP

CRISMOSIL

WALL SURFACE

● Select finishes

.WH-WH

CRISMOSIL | 0° | 0° | CRI ≥90 | IK06 | IP20 | LIFE 50000H | DIM OPTIONAL | | INTEGRATED | INDOOR | | 220-240 V 50-60 Hz | CE

WALL METIS

REF 10098.WS

PHOTOMETRY

40º 60º

WALL ELARA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10097	.01	●	LED	.OP	.ST	.9	.27	837	8	350	.DA .PU .D1	
								.30	930				
								.40	1020				
						.HI		.27	1745	16	700		
								.30	1938				
								.40	2077				

LUMINAIRE INCLUDES

With opal optic cover.
Con difusor opal.

Wall surface mounting kit

Reference order | 10097.01.WS.XX.XX.XX.9.XX.XX

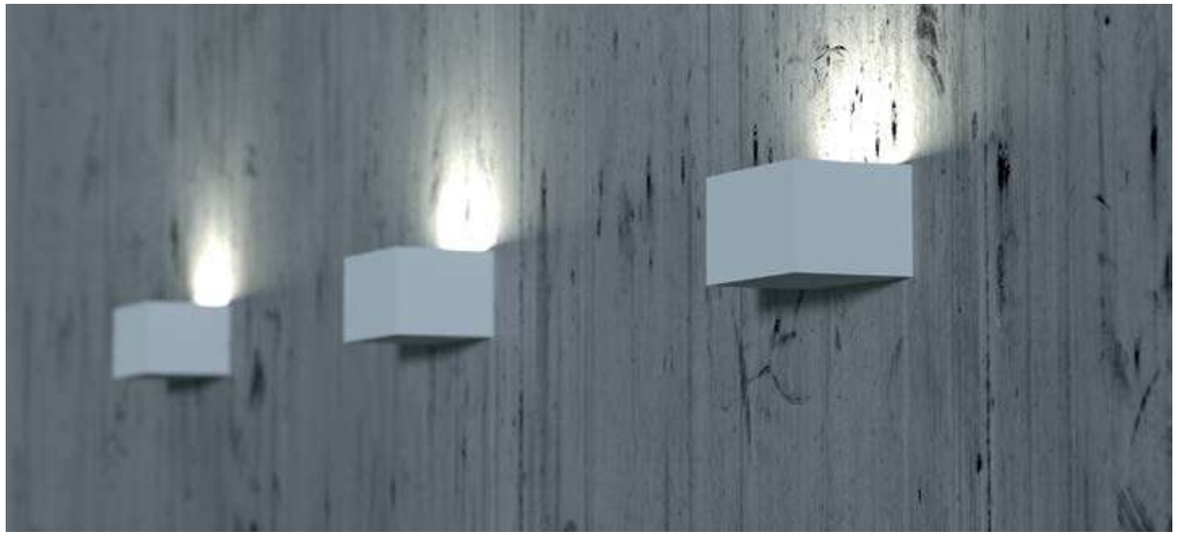

• FINISHES

□

⬟ DIMENSIONS

.01

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

UP

CRISMOSIL

.WS

WALL SURFACE

● Select finishes

.WH-WH

WALL
ELARA

REF 10097.WS

WALL TEBE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10096	**.01**	●	**LED**	**.OP**	.ST	.9	.27	387	3	500	**.DA .PU .D1**	
								.30	430				
								.40	450				
						.HI		.27	783	6	500		
								.30	870				
								.40	910				

WALL TEBE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10096	**.02**	●	**LED**	**.OP**	.ST	.9	.27	387	3	500	**.DA .PU .D1**	
								.30	430				
								.40	450				
						.HI		.27	783	6	500		
								.30	870				
								.40	910				

WALL TEBE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10096	**.03**	●	**LED**	**.OP**	.ST	.9	.27	820	6	500	**.DA .PU .D1**	
								.30	870				
								.40	910				
						.HI		.27	1640	12	500		
								.30	1730				
								.40	1817				

Con difusor opal. / *2700K sólo disponible en 10094.
*With opal optic cover. / *2700K only available in 10094.*

LUMINAIRE INCLUDES

Wall surface mounting kit

Reference order | 10096.XX.WS.XX.XX.XX.9.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

UP

CRISMOSIL

.WS

WALL SURFACE

● Select finishes

.WH-WH

WALL TEBE

REF 10096.WS

WALL LEDA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10051	**.01**	●	**LED**	**.OP**	.ST	.9	**.27**	820	6	500	**.DA .PU .D1**	
								.30	870				
								.40	910				
						.HI		**.27**	1640	12	500		
								.30	1730				
								.40	1817				

WALL LEDA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10051	**.02**	●	**LED**	**.OP**	.ST	.9	**.27**	1640	12	500	**.DA .PU .D1**	
								.30	1740				
								.40	1820				
						.HI		**.27**	3280	24	500		
								.30	3460				
								.40	3634				

WALL LEDA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10051	**.03**	●	**LED**	**.OP**	.ST	.9	**.27**	2460	18	500	**.DA .PU .D1**	
								.30	2610				
								.40	2730				
						.HI		**.27**	4920	36	500		
								.30	5190				
								.40	5452				

LUMINAIRE INCLUDES

Con difusor opal.
With opal optic cover.

Wall surface mounting kit

Reference order | ⬟ ● ■ ▼ 10051.XX.WS.XX.XX.XX.9.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

UP

● Select finishes

.WH-WH

WALL LEDA

REF 10051.WS

WALL ARCE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10055	.01	●	LED	.OP	.ST	.9	.27	820	6	500	.DA .PU .D1	
								.30	870				
								.40	910				
						.HI		.27	1640	12	500		
								.30	1730				
								.40	1817				

WALL ARCE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10055	.02	●	LED	.OP	.ST	.9	.27	1640	12	500	.DA .PU .D1	
								.30	1740				
								.40	1820				
						.HI		.27	3280	24	500		
								.30	3460				
								.40	3634				

WALL ARCE	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10055	.03	●	LED	.OP	.ST	.9	.27	2460	18	500	.DA .PU .D1	
								.30	2610				
								.40	2730				
						.HI		.27	4920	36	500		
								.30	5190				
								.40	5452				

LUMINAIRE INCLUDES

Wall surface mounting kit

Con difusor opal.
With opal optic cover.

Reference order | 10055.XX.WS.XX.XX.XX.9.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

UP

WALL SURFACE

.WS

● Select finishes

.WH-WH

WALL ARCE

REF 10055.WS

WALL CARPO	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10059	.01	●	LED	.OP	.ST	.9	.27	2x820	6+6	500	.DA .PU .D1	
								.30	2x870				
								.40	2x910				
						.HI		.27	2x1640	12+12	500		
								.30	2x1730				
								.40	2x1817				

WALL CARPO	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10059	.02	●	LED	.OP	.ST	.9	.27	2x1640	12+12	500	.DA .PU .D1	
								.30	2x1740				
								.40	2x1820				
						.HI		.27	2x3280	24+24	500		
								.30	2x3460				
								.40	2x3634				

WALL CARPO	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10059	.03	●	LED	.OP	.ST	.9	.27	2x2460	18+18	500	.DA .PU .D1	
								.30	2x2610				
								.40	2x2730				
						.HI		.27	2x4920	36+36	500		
								.30	2x5190				
								.40	2x5452				

LUMINAIRE INCLUDES

Con difusor opal.
With opal optic cover.

Wall surface mounting kit

Reference order | 10059.XX.WS.XX.XX.XX.9.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

UP-DOWN

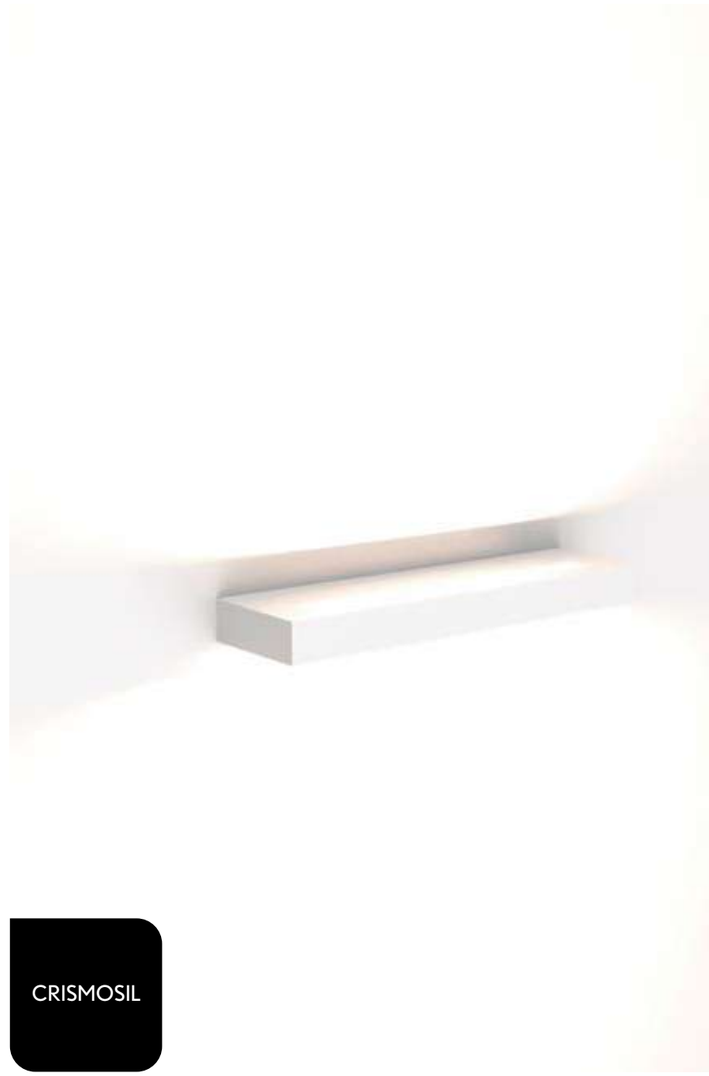

CRISMOSIL

WALL SURFACE

.WS

● Select finishes

.WH-WH

WALL CARPO

REF 10059.WS

WALL RECESSED

VISUAL INDEX

WALL LIGHTS

MAGRIT

20127 PAG. 820

KLEE

20128 PAG. 820

KLEE SQ

20129 PAG. 820

ADIMA

8104 PAG. 822

ADIMA SQ

8103 PAG. 822

FLOOR WASHER

TYRA

10561 PAG.824

LYRA

10560 PAG. 826

MYRA

10564 PAG. 828

ORBIT

ORBIT

10091 PAG. 830

ORBIT SQ

10090 PAG. 831

ORBIT NADIR

10113 PAG. 832

ORBIT NADIR SQ

10114 PAG. 834

ORBIT ARA

10006 PAG. 836

DRACO

DRACO

10119 PAG. 838

DRACO TUCANA

10008 PAG. 840

DRACO ZAHARA

10009 PAG. 842

DRACO ORION

10011 PAG. 844

MAGRIT	REF.	DIMEN-SION ⬟	FINISH	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20127	**.01**	●	**.25**	.ST	.9	.30	118	2.5	500	-	

Reference order | ⬟ ● ■ 20127.01.WR.XX.25.ST.9.30

KLEE	REF.	DIMEN-SION ⬟	FINISH	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20128	**.01**	●	**.25**	.ST	.9	.30	118	2.5	500	-	

Reference order | ⬟ ● ■ 20128.01.WR.XX.25.ST.9.30

KLEE SQ	REF.	DIMEN-SION ⬟	FINISH	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	20129	**.01**	●	**.25**	.ST	.9	.30	118	2.5	500	-	

Reference order | ⬟ ● ■ 20129.01.WR.XX.25.ST.9.30

• FINISHES

COLORS

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

25º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

3000K

▼ DIMMABLE OPTIONS

-

▲ LIGHT DISTRIBUTION

SIDE

WALL RECESSED

.WR

● Select external-internal finishes

.WH-WH .BK-BK .GC-GC

MAGRIT | KLEE | SQ

REF 20127.WR | 20128.WR | 20129.WR

PHOTOMETRY

25º

ADIMA	REF.	DIMEN-SION ⬟	FINISH	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	8104	**.01**	●	**.25**	.ST	.9	.30	154	3	700	-	

Reference order ⬟ ● ■ 8104.01.WR.XX.25.ST.9.30

ADIMA SQ	REF.	DIMEN-SION ⬟	FINISH	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	8103	**.01**	●	**.25**	.ST	.9	.30	154	3	700	-	

Reference order ⬟ ● ■ 8103.01.WR.XX.25.ST.9.30

• FINISHES

COLORS

□ ■

DIMENSIONS

⬟ View in family specifications

.01

LIGHTING OPTIONS

■ BEAM ANGLE

25º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

3000K

▼ DIMMABLE OPTIONS

-

▲ LIGHT DISTRIBUTION

SIDE

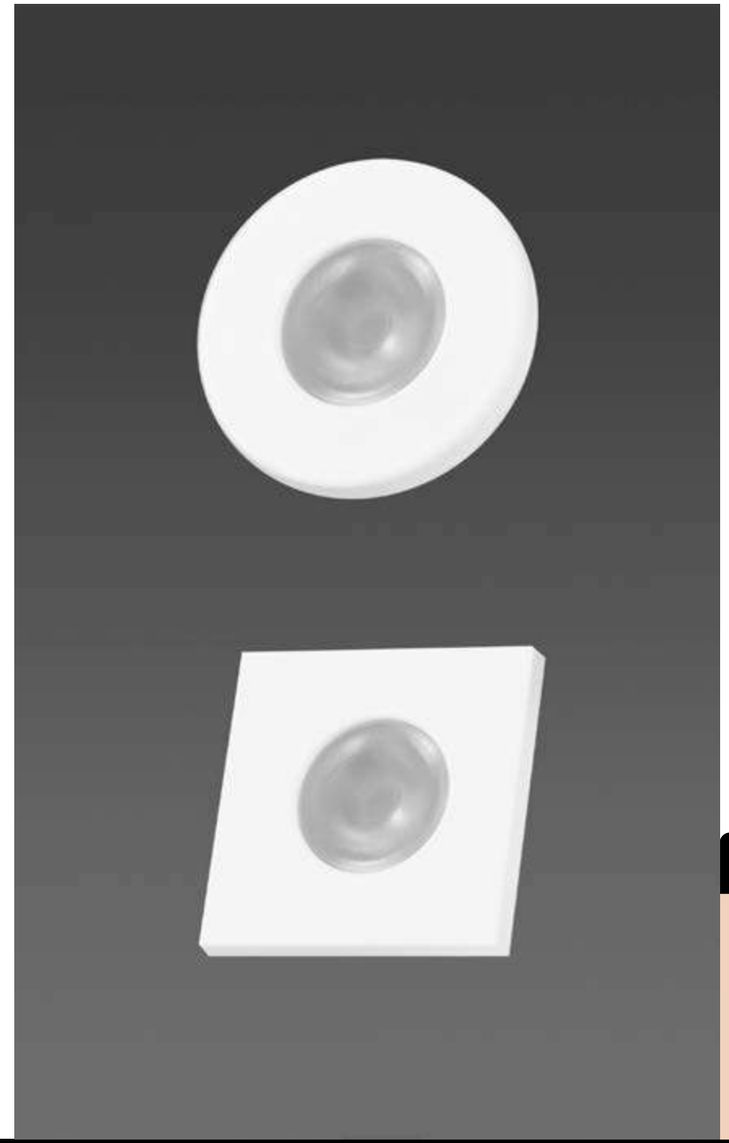

● Select finishes

.WH-WH .BK-BK

ADIMA
ADIMA SQ

REF 8104.WR | 8103.WR

PHOTOMETRY

25º

TYRA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	10561	**.01**	●	**LED**	**.25**	**.ST**	**.9**	**.27**	237	3	700	**.DA .PU .D1**	
								.30	246				
								.40	261				
	10561	**.02**	●	**LED**	**.25**	**.ST**	**.9**	**.27**	237	3	700	**.DA .PU .D1**	
								.30	246				
								.40	261				
	10561	**.03**	●	**LED**	**.25**	**.ST**	**.9**	**.27**	237	3	700	**.DA .PU .D1**	
								.30	246				
								.40	261				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed mounting kit

Reference order | 10561.XX.WR.XX.25.ST.9.XX.XX

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

□

• DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ BEAM ANGLE

25º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

.WR

WALL RECESSED

● Select finishes

.WH-WH

TYRA

REF 10561.WR







LYRA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10560	.01	●	LED	.OP	.ST	.9	.27	680	7	350	.DA .PU .D1	
								.30	750				
								.40	780				
						.HI		.27	713	10	500		
								.30	750				
								.40	825				
	10560	.02	●	LED	.OP	.ST	.9	.27	680	7	350	.DA .PU .D1	
								.30	750				
								.40	780				
						.HI		.27	713	10	500		
								.30	750				
								.40	825				
	10560	.03	●	LED	.OP	.ST	.9	.27	680	7	350	.DA .PU .D1	
								.30	750				
								.40	780				
						.HI		.27	713	10	500		
								.30	750				
								.40	825				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed mounting kit

Reference order | 10560.XX.WR.XX.OP.XX.9.XX.XX

• FINISHES

□

• DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD | HI

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

.WR

WALL RECESSED

● Select finishes

.WH-WH

LYRA

REF 10560.WR

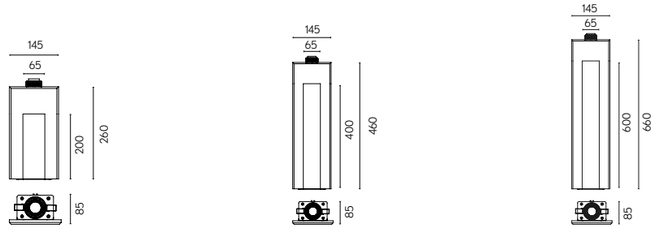

MYRA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	VdC	DIMM ▼	SKETCH
	10564	**.01**	●	**LED**	**.OP**	.ST	.9	.27	188	3	24	**.DA .PU .D1**	275x150 · 100 · 145 · 270 · 85
								.30	195				
								.40	248				
						.HI		.27	403	6	24		
								.30	417				
								.40	530				
	10564	**.02**	●	**LED**	**.OP**	.ST	.9	.27	376	6	24	**.DA .PU .D1**	475x150 · 100 · 145 · 470 · 85
								.30	390				
								.40	495				
						.HI		.27	806	12	24		
								.30	834				
								.40	1061				
	**10564**	**.03**	●	**LED**	**.OP**	.ST	.9	.27	500	9	24	**.DA .PU .D1**	675x150 · 100 · 145 · 670 · 85
								.30	584				
								.40	743				
						.HI		.27	1210	18	24		
								.30	1252				
								.40	1591				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed mounting kit

Reference order | 10564.XX.WR.XX.OP.XX.9.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02 | .03

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD | HI

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

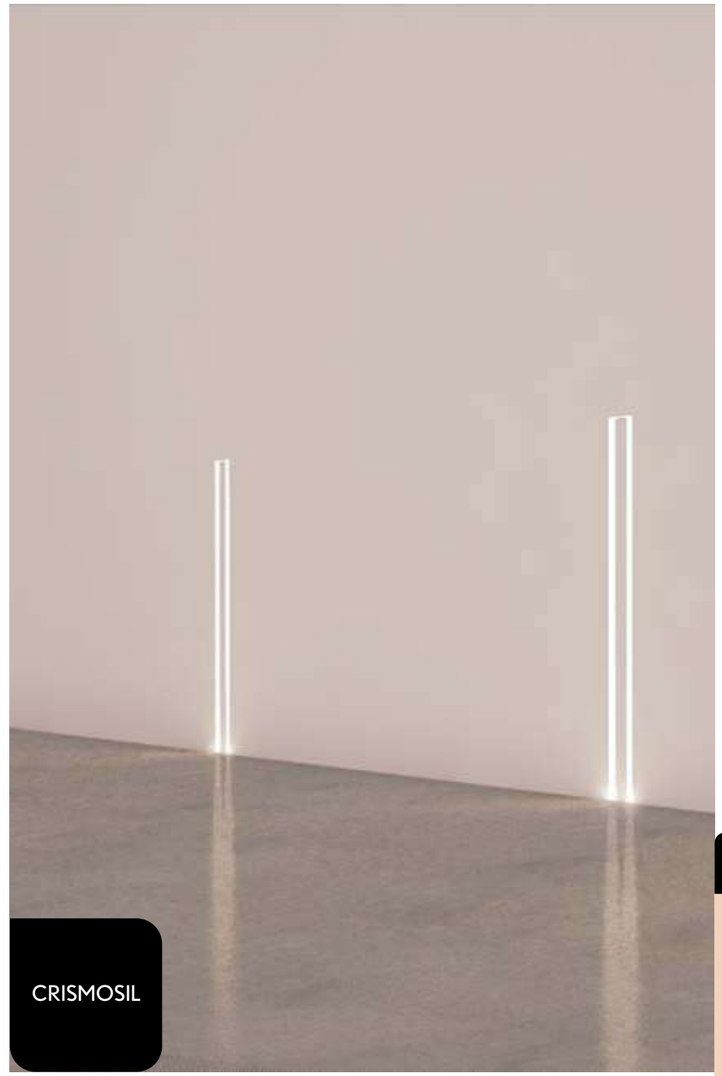

.WR

WALL RECESSED

● Select finishes

.WH-WH

CRISMOSIL · 0° · 90° · CRI ≥90 · IK06 · IP20 IP23 · LIFE 50000H · DIM OPTIONAL · INTEGRATED · INDOOR · 220-240 V 50-60 Hz · CE

MYRA

REF 10564.WR

145 · 65 · 210 · 270 · 85

145 · 65 · 410 · 470 · 85

145 · 65 · 610 · 670 · 85

• FINISHES

□

• DIMENSIONS

.01

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ORBIT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	10091	.01	.WH-WH	LED	.OP	.ST	.9	.27	295	3	350	.DA .PU .D1	
								.30	305				
								.40	320				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed mounting kit

Reference order | 10091.01.WR.XX.OP.ST.9.XX.XX

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*



ORBIT

REF 10091.WR



• FINISHES

□

• DIMENSIONS

.01

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

ORBIT SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	10090	.01	.WH-WH	LED	.OP	.ST	.9	.27	295	3	350	.DA .PU .D1	
								.30	305				
								.40	320				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed mounting kit

Reference order | 10090.01.WR.XX.OP.ST.9.XX.XX

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*



ORBIT SQ

REF 10090.WR



ORBIT NADIR	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	10113	.01	●	LED	.25	.ST	.9	.27	237	3	700	.DA .PU .D1	
								.30	246				
								.40	261				

ORBIT NADIR	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	10113	.02	●	LED	.25	.ST	.9	.27	237	3	700	.DA .PU .D1	
								.30	246				
								.40	261				

LUMINAIRE INCLUDES

Recessed mounting kit

Reference order ⬟ ● ■ ▼

10113.XX.WR.XX.25.ST.9.XX.XX

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

□

⬟ DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

25º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

CRISMOSIL

.WR

WALL RECESSED

● Select finishes

.WH-WH

ORBIT NADIR

REF 10113.WR







ORBIT NADIR SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	10114	.01	●	LED	.25	.ST	.9	.27	237	3	700	.DA .PU .D1	
								.30	246				
								.40	261				

ORBIT NADIR SQ	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	10114	.02	●	LED	.25	.ST	.9	.27	237	3	700	.DA .PU .D1	
								.30	246				
								.40	261				

LUMINAIRE INCLUDES

Recessed mounting kit

Reference order | ⬟ ● ■ ▼ 10114.XX.WR.XX.25.ST.9.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

25º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

CRISMOSIL

.WR

WALL RECESSED

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

● Select finishes

.WH-WH

ORBIT
NADIR SQ

REF 10114.WR







ORBIT ARA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	10006	**.01**	●	**LED**	**.25**	**.ST**	**.9**	**.27**	237	3	700	**.DA .PU .D1**	
								.30	246				
								.40	261				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed mounting kit

Reference order | ⬟ ● ■ ▼ 10006.01.WR.XX.25.ST.9.XX.XX

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

• FINISHES

□

⬟ DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE

25º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

CRISMOSIL

.WR

WALL RECESSED

● Select finishes

.WH-WH

ORBIT ARA

REF 10006.WR

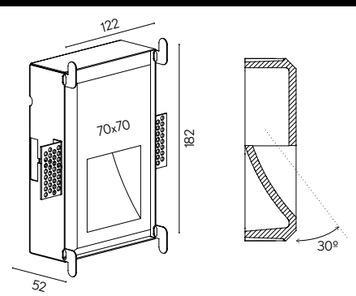

DRACO	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	10119	**.01**	●	**LED**	**.25**	**.ST**	**.9**	**.27**	237	3	700	**.DA .PU .D1**	
								.30	246				
								.40	261				

DRACO	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	10119	**.02**	●	**LED**	**.25**	**.ST**	**.9**	**.27**	237	3	700	**.DA .PU .D1**	
								.30	246				
								.40	261				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed mounting kit

Reference order | 10119.XX.WR.XX.25.ST.9.XX.XX

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

● Select finishes

.WH-WH





● FINISHES

□

⬟ DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

25º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

CRISMOSIL

.WR

WALL RECESSED

DRACO

REF 10119.WR

DRACO TUCANA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM *1 ▼	SKETCH
	10008	**.01**	●	**LED**	**.OP**	.ST	.9	.27	387	3	500	**.DA .PU .D1**	
								.30	430				
								.40	450				
						.HI		.27	783	6	500		
								.30	870				
								.40	910				

DRACO TUCANA	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10008	**.02**	●	**LED**	**.OP**	.ST	.9	.27	387	3	500	**.DA .PU .D1**	
								.30	430				
								.40	450				
						.HI		.27	783	6	500		
								.30	870				
								.40	910				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed mounting kit

Reference order | 10008.XX.WR.XX.OP.XX.9.XX.XX

*1 Remote driver when dimmable. *Driver remoto cuando es dimable.*

● Select finishes

.WH-WH





• FINISHES

□

⬟ DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD | HI

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

UP

CRISMOSIL

.WR

WALL RECESSED

DRACO TUCANA

REF 10008.WR

DRACO ZAHARA	REF.	DIMENSIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10009	.01	●	LED	.OP	.ST	.9					.DA .PU .D1	
								.30	430	3	500		
								.40	450				
						.HI							
								.30	870	6	500		
								.40	910				

DRACO ZAHARA	REF.	DIMENSIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10009	.02	●	LED	.OP	.ST	.9	.27	387			.DA .PU .D1	
								.30	430	3	500		
								.40	450				
						.HI		.27	783				
								.30	870	6	500		
								.40	910				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed mounting kit

Reference order | ⬟ ● ■ ▼ | 10009.XX.WR.XX.OP.XX.9.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD | HI

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

UP

CRISMOSIL

.WR

WALL RECESSED

• Select finishes

.WH-WH

DRACO ZAHARA

REF 10009.WR





DRACO ORION	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10011	.01	●	LED	.OP	.ST	.9	.27	387	9	500	.DA .PU .D1	
								.30	430				
								.40	490				
						.HI		.27	783	18	500		
								.30	870				
								.40	980				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed mounting kit

Reference order | 10011.XX.WR.XX.OP.XX.9.XX.XX

• FINISHES

□

⬟ DIMENSIONS

.01

LIGHTING OPTIONS

■ DIFFUSER

OPAL

POWER

STANDARD | HI

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

UP

CRISMOSIL

.WR

WALL RECESSED

● Select finishes

.WH-WH

DRACO ORION

REF 10011.WR

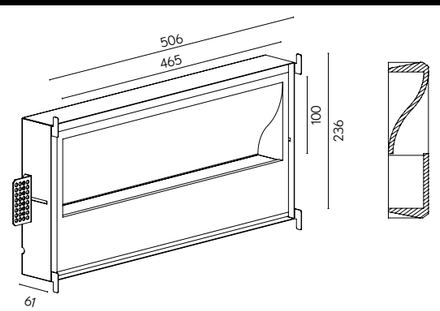

OUTDOOR

VISUAL INDEX

WALL ZEN

WALL ZEN OUT

11600 PAG. 852

WALL ZEN SQ OUT

11601 PAG. 854

WALL OUT

WALL ARA OUT

10006 PAG. 856

WALL ZAHARA OUT

10009 PAG. 857

WALL DRACO OUT

10119 PAG. 858

NOCTUA OUT

NOCTUA SQ OUT

10099 PAG.860

WALL ZEN OUT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	11600	**.01**	**.CEM**	**LED**	**.38**	**.ST**	**.9**	**.27**	358	9	400	-	
								.30	511				
								.40	505				

WALL ZEN OUT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	11600	**.02**	**.CEM**	**LED**	**.38**	**.ST**	**.9**	**.27**	716	18	400	-	
								.30	1022				
								.40	1366				

LUMINAIRE INCLUDES

Con difusor opal.
With opal optic cover.

Surface mounting kit

Reference order | 11600.XX.OUT.WS.XX.OP.XX.9.XX

• FINISHES

⬟ DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

38º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

-

▲ LIGHT DISTRIBUTION

UP | UP-DOWN (.02)

new

OUTDOOR

CEMENT · 0° · 0° · CRI ≥90 · IK06 · IP65 · LIFE 50000H · DIM OPTIONAL · INTEGRATED · INDOOR · 220-240 V 50-60 Hz · CE

WALL
ZEN OUT

REF 11600.OUT.WS

WALL ZEN SQ OUT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	11601	.01	.CEM	LED	.38	.ST	.9	.27	358	9	400	-	
								.30	511				
								.40	683				

WALL ZEN SQ OUT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	11601	.02	.CEM	LED	.38	.ST	.9	.27	716	18	400	-	
								.30	1022				
								.40	1366				

LUMINAIRE INCLUDES

Con difusor opal.
With opal optic cover.

Surface mounting kit

Reference order | ⬟ ● ■ 11601.XX.OUT.WS.CEM.38.ST.9.XX

• FINISHES

⬟ DIMENSIONS

.01 | .02

LIGHTING OPTIONS

■ BEAM ANGLE

38º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

-

▲ LIGHT DISTRIBUTION

UP | UP-DOWN (.02)

new

OUTDOOR

CEMENT · 0° · 0° · CRI ≥90 · A+ · IP65 · LIFE 50000H · DIM OPTIONAL · INC. · INDOOR · CE

WALL
ZEN SQ OUT

REF 11601.OUT.WS

• FINISHES

• DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE

38º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

new

WALL ARA OUT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10006	.01	.CEM	LED	.38	.ST	.9	.27	226	7	310	-	
								.30	238				
								.40	273				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed mounting kit

Reference order | 10006.01.OUT.WR.CEM.38.ST.9.XX

WALL
ARA OUT

REF 10006.OUT.WR

• FINISHES

• DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE

38º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1..10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

new

WALL ZAHARA OUT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10009	.01	.CEM	LED	.38	.ST	.9	.27	484	11	470	-	
								.30	510				
								.40	534				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed mounting kit

Reference order | 10009.01.OUT.WR.CEM.38.ST.9.XX

WALL
ZAHARA OUT

REF 10009.OUT.WR

OUTDOOR

new

• FINISHES

■

• DIMENSIONS

.01

LIGHTING OPTIONS

■ BEAM ANGLE

38º

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

WALL DRACO OUT	REF.	DIMENSIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10119	.01	.CEM	LED	.38	.ST	.9	.27	392	6	290	-	
								.30	413				
								.40	600				

Con difusor opal.
With opal optic cover.

LUMINAIRE INCLUDES

Recessed mounting kit

Reference order | 10119.01.OUT.WR.CEM.38.ST.9.XX

WALL
DRACO OUT

REF 10119.OUT.WR

OUTDOOR

NOCTUA SQ OUT	REF.	DIMEN-SIONS ⬟	FINISHES ●	LAMP	OPTIC OPTIONS ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10099	.01	CEM	LED	.40	.ST	.8	.30	653	13	550	-	
								.40	786				

LUMINAIRE INCLUDES

Surface mounting kit

Reference order | ⬟ ● ■ 10099.01.OUT.SR.CEM.40.ST.8.XX

• FINISHES

⬟ DIMENSIONS

.03

LIGHTING OPTIONS

■ BEAM ANGLE

40º

POWER

STANDARD

CRI

80

COLOR TEMPERATURE

3000K | 4000K

▼ DIMMABLE OPTIONS

-

▲ LIGHT DISTRIBUTION

DOWN

new

OUTDOOR

OUTDOOR

NOCTUA SQ OUT

REF 10099.OUT.SR

PHOTOMETRY

40º 60º

How to create a Reference Order

Como crear la Referencia

When ordering a Florida SQ luminaire, diameter 350 mm, pendant mounting, black external-internal finish, standard power, CRI 90, 2700 K, DALI dimming and indirect light.
Si deseas pedir una luminaria Florida SQ de diámetro 350 mm, suspendida en acabado interior y exterior negro, potencia standard, CRI 90, 2700 K, regulación DALI y con luz indirecta.

FLORIDA SQ	REF.	DIMEN-SION ⬟	FINISH ●	DIFFUS-ER ■	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲.UP *1		DIMM ▼	SKETCH
								LUMEN	WATT	mA	LUMEN	WATT		
	10191	**.35**	**.BK-BK**	**.OP**	**.ST**	**.9**	**.27**	2706	27	700	470	7	**.DA**	

REF.35.PN.BK-BK.OP.ST.9.27.DA.UP
1 2 3 4 5 6 7 8 9 10

1 Select Luminaire's reference
Selecciona la referencia de la luminaria

⬟ **2** Choose Luminaire's dimensions | See luminaire to confirm dimension criteria
Elije las dimensiones de la luminaria | Ver luminaria para confirmar criterio de dimensiones

3 Confirm Luminaire's Installation
Confirma la instalación de la luminaria

.PN Pendant | *Suspendida*
.RF Recessed with Frame | *Empotrado con marco*
.SR Surface | *Superficie*
.TK Tracklight | *Proyector de carril*
.TR Trimless | Empotrado
.WR Wall Recessed | Empotrado en pared
.WS Wall Surface | Aplique de pared

● **4** Pick available finish options
Escoge los acabados de la luminaria

ALUMINIUM | *ALUMINIO*
.BK Black | *Negro*
.BM Blue Mint | *Azul Menta*
.BS Blue Stone | *Azul Piedra*
.BC Brown Coffee | *Marrón Café*
.CR Copper Rose | *Cobre Rosado*
.CB Coral Bronze | *Bronce Coral*
.GC Gold Cava | *Oro Cava*
.GY Gray | *Gris*
.MG Military Green | *Verde Militar*
.VC Violet Chiffon | *Violeta Chifón*
.WH White | *Blanco*
.YM Yellow Mustard | *Amarillo Mostaza*

■ **5** Select optic options
Selecciona las opciones ópticas

DIFFUSERS | *DIFUSORES*
.MP Microprismatic | *Microprismático*
.OP Opal | *Opal*
.SI Silicone | *Silicona*
.TP Transparent | *Transparente*

BEAM ANGLES | *ÁNGULOS HAZ DE LUZ*
Refer to Luminaire's light distribuition options and choose from a narrow spot to a wider flood
Consulte las opciones de distribución de la luz de las luminarias desde un punto angosto hasta una inundación más amplia

ACOUSTIC | *ACÚSTICO*
.50 Acoustic Gray | *Gris Acústico*
.51 Acoustic Dark Gray | *Gris Oscuro Acústico*
.52 Acoustic Camel | *Camel Acústico*
.53 Acoustic Light Blue | *Azul Claro Acústico*
.54 Acoustic Dark Blue | *Azul Oscuro Acústico*
.55 Acoustic Green | *Verde Acústico*
.56 Acoustic White | *Blanco Acústico*
.57 Acoustic Black | *Negro Acústico*
.60 Acoustic Yellow | *Amarillo Acústico*
.61 Acoustic Red | *Rojo Acústico*

6 Choose Power options
Elige las opciones de Potencia

.HI High | *Alta*
.ST Standard | *Estándar*

7 Confirm CRI (color rendering index)
Confirma las opciones de CRI (color rendering index)

.8 80
.9 90

8 Pick Kelvin degrees
Escoge grados Kelvin

.27 2700
.30 3000
.40 4000
.TW Tunable white

CEMENT | *CEMENTO*
.CEM Cement | *Cemento*

CRISMOSIL
.WH White | *Blanco*

OTHERS | *OTROS*
.SA Striped Aluminum | *Aluminio Rayado*
.CH Chrome | *Cromo*
.MS Matt Silver | *Plata Mate*
.GF Graphite | *Grafito*

▼ **9** Select dimmable options
Selecciona opciones regulación

.D1 1..10
.DA DALI
.PU PUSH / *PULSADOR*

▲ **10** Indirect light
Luz indirecta

.UP Uplight | *Luz indirecta*

STEP BY STEP

FINISHES

ALUMINIUM | *ALUMINIO*

.BK Black | *Negro*

.BC Brown Coffee | *Marrón Café*

.GC Gold Cava | *Oro Cava*

.YM Yellow Mustard | *Amarillo Mostaza*

.BM Blue Mint | *Azul Menta*

.CR Copper Rose | *Cobre Rosado*

.GY Gray | *Gris*

.VC Violet Chiffon | *Violeta Chifón*

.BS Blue Stone | *Azul Piedra*

.CB Coral Bronze | *Bronce Coral*

.MG Military Green | *Verde Militar*

.WH White | *Blanco*

ACOUSTIC | *ACÚSTICO*



.50
Acoustic Gray
Gris Acústico



.51
Acoustic Dark Gray
Gris Oscuro Acústico

.52
Acoustic Camel
Camel Acústico

.53
Acoustic Light Blue
Azul Claro Acústico

.54
Acoustic Dark Blue
Azul Oscuro Acústico

.55
Acoustic Green
Verde Acústico

.56
Acoustic White
Blanco Acústico

.57
Acoustic Black
Negro Acústico

.60
Acoustic Yellow
Amarillo Acústico

.61
Acoustic Red
Rojo Acústico



CEMENT | *CEMENTO*

.CEM
Cement | *Cemento*

ALUMINIUM | *ALUMINIO*

.SA
Striped Aluminum | *Aluminio Rayado*

STRUCTURAL

.WH
White | *Blanco*

Rectangular cut.
Agujero de corte rectangular.

Circular cut.
Agujero de corte circular.

Luminaire not suitable to be covered with thermal insulating material.
Luminaria no adecuada para cubrirse con aislante térmico.

Recessed luminaire suitable for installation on normally inflammable surfaces.
Luminaria empotrada adecuada para montaje en superficies normalmente inflamables.

Surface luminaire suitable for installation on normally inflammable surfaces.
Luminaria superficial adecuada para montaje en superficies normalmente inflamables.

IP20 / IP40
Luminaire with two different IP degrees of protection at the top and bottom.
Grado IP de la luminaria tanto por la parte superior e inferior del empotramiento de la luminaria.

220-240 V 50-60 Hz
AC input for luminaire is 220-240V / 50-60Hz.
Input AC de luminaria a 220-240V/50-60Hz.

48 V remote
DC output for luminaire is 48 V DC.
Output DC de trabajo de luminaria a 48 V DC.

REMOTE
Driver remote.
Driver remoto.

INTEGRATED
Driver integrated inside the luminaire.
Driver integrado dentro de la luminaria.

DIM OPTIONAL
Optional dimmer.
Regulador opcional.

DIM OPTIONAL
Optional remote dimmer.
Regulador remoto opcional.

Class I: Luminaire in which the protection against electric shocks falls into a protective conductor grounded.
Clase I: Luminaria en que la protección contra los choques eléctricos recae a un conductor de protección puesto a tierra.

Class II: Luminaire in which the protection against electric shocks includes additional safety features such as double insulation or reinforced insulation.
Clase II: Luminaria en que la protección contra los choques eléctricos, comprende medidas de seguridad suplementarias, tales como el doble aislamiento o el aislamiento reforzado.

Class III: Luminaire in which the protection against electric shocks falls on the power supply with very low safety voltage (SELV) and in which no voltages higher than the very low safety voltage are generated.
Clase III: luminaria en la que la protección contra los choques eléctricos recae en la alimentación con muy baja tensión de seguridad (MTBS) y en la que no se generan tensiones superiores a la muy baja tensión de seguridad.

(mm)
Luminaire's total length.
Longitud total de la luminaria.

UGR <19
Unified Glare Rating.
Índice de Deslumbramiento Unificado.

ALUMINIUM
Luminaire is made of aluminum.
Luminaria fabricada de aluminio.

ALUMINIUM SILICONE
Luminaire is made of aluminum and silicone.
Luminaria fabricada de aluminio y silicona.

STRUCTURAL
Luminaire is manufactured with trademarked material Crismosil that combines gypsum, fibreglass and acrylic resins.
La luminaria está fabricada con Crismosil, un material registrado que combina un yeso especial con fibra de vidrio y resinas acrílicas.

CEMENT
Luminaire is made out of cement.
La luminaria está fabricada con cemento.

Lamp not included.
Lámpara no incluída.

According to european directives and EN 60598.
Conforme a las directivas europeas y la norma EN 60598.

.SR
Surface.
Superficie.

.PN
Pendant.
Colgante.

.RF
Recessed with frame.
Empotrado con marco.

Only for indoor use.
Solo para uso interior.

Only for outdoor use.
Solo para uso exterior.

Indoor / outdoor use.
Uso interior / exterior.

Minimum height of the false ceiling.
Altura mínima del falso techo.

ROTATION
Rotation degrees.
Grados de giro.

ROTATION
Tilting degree.
Grados de basculación.

IK06
Protection rate against external mechanical impacts.
Grado de resistencia contra golpes mecánicos externos.

50000H
Luminaire's Lifetime.
Vida útil de la luminaria.

.TR
Trimless.
Empotrado sin marco.

.WS
Wall surface.
Aplique de pared.

.WR
Wall recessed.
Empotrado en pared.

.TK
Tracklight.
Proyector de carril.

ICON FLASH

Connecting
your equipment...

Cómo conecto?

SEVERAL FIXTURES CONNECTION TO A SINGLE CONSTANT CURRENT DRIVER

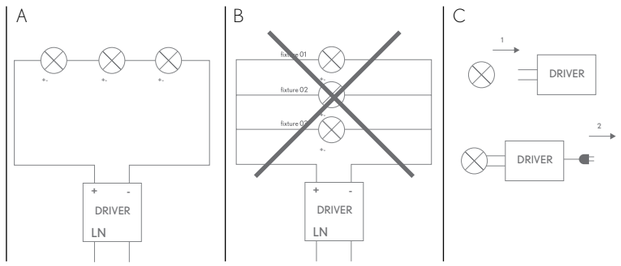

Does

When using a single driver, wire all lighting fixtures in series.
LED strips must be wired in parallel.

Dont's

Lighting fixtures must always be connected in no-voltage conditions.
The driver must not be connected to the power supply when connecting the lighting fixtures.
If there are intermediate connections, follow this diagram to avoid damaging your lighting fixtures. (Diagram)
Lighting fixtures must not be connected directly to the AC power source without a driver. Never expose lighting fixtures to heat sources or other electronic equipment.

Consideraciones

Todas nuestras luminarias cuando usan un solo driver se cablearán en serie. Las tiras de led se deberán de cablear en paralelo entre sí.

Advertencias

Las luminarias se deben de conectar siempre apagadas. No se debe de tener el driver conectado a la red encendido al conectar las luminarias. En caso de tener conexiones intermedias se debe de seguir el siguiente esquema para no dañar las luminarias. (Esquema)
No se debe de conectar la luminaria directamente al AC sin driver.
No se deben de colocar las luminarias cerca de fuentes de calor ni de otros aparatos electrónicos.

Wiring - EM converter LED BASIC with a standard LED Driver and one LED module for main and emergency operation

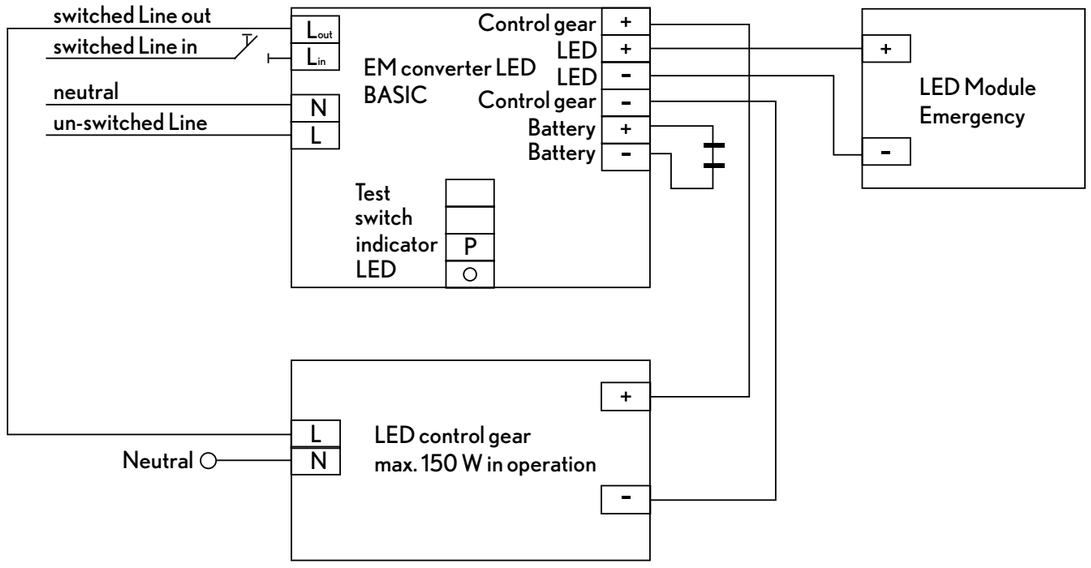

Emergency kit

There are two types of emergency lighting:
Centralised and single emergency lighting

Centralised emergency lighting

A large battery or generator supplies energy to the emergency lighting fixtures via a specially protected power supply.
In this case, the drivers have a DC recognition function that uses the input voltage to detect the emergency mode.
The driver automatically turns on the DC mode and controls the light to the set DC level.
The DC lighting level is generally 15% of nominal. When the installation enters DC mode, all the sensors stop working.

What do I need?

You only need one DC-ready driver in addition to AC-mode, which is used during normal operation of the lighting fixture. An additional battery or generally must be installed to connect the light fixture driver.

Decentralised emergency lighting

This does not have its own mains supply. An emergency kit consisting of emergency lighting equipment, a battery and LED indicator is required.

How does the emergency kit work?

The emergency kits supplied by BPM are for permanent use, and work normally with your driver and when the general mains network fails.
The emergency kit driver detects there is voltage in the network and allows the lighting fixture driver work under normal conditions. In case of a power failure in the grid, the emergency kit driver releases the energy in the battery to power the LEDs.

What do I need?

You need a lighting fixture, its driver and LEDs and an emergency kit. The battery in the emergency kit must be installed separately from the lighting fixture and there must be a space to locate it.

How many emergency kits do I need?

An emergency kit can supply one driver with less than 150W.
If the lighting fixture has more than one driver and full lighting is required, you need the same number as emergency kits as drivers in the light fixture.
If only one kit is fitted, only the part of the lighting fixture that is associated with the driver will light up.

Kit de emergencia

Existen dos tipos de iluminación de emergencia:
Iluminación de emergencia de alimentación centralizada y descentralizada

Emergencia Centralizada

Una batería grande o generador suministran la energía necesaria para la iluminación de emergencia a través de una red de suministro con una protección especial.
En este caso los drivers tienen una función de reconocimiento DC que usa el voltaje de entrada para detectar el modo de emergencia. El driver automáticamente enciende el modo DC y regula la luz al nivel definido DC. Generalmente el nivel DC de iluminación es del 15% del nominal. Cuando la instalación entra en modo DC todos los sensores dejan de funcionar.

¿Qué necesito?

Sólo se necesita un driver preparado para trabajar en modo DC además de en modo AC, que será el que se use durante el funcionamiento habitual de la luminaria. La instalación debe de estar preparada con una batería o generador adicional donde conectar el driver de la luminaria.

Emergencia Descentralizada.

No cuenta con una red de alimentación propia. Se necesita de kit de emergencia compuesto por un equipo de iluminación de emergencia, una batería y un indicador LED.

¿Cómo funciona el Kit de emergencia?

Los Kit de emergencia suministrados por BPM son de uso permanente, es decir, funciona normalmente con su driver y además cuando falla la red general.
El driver del Kit de emergencia comprueba que hay tensión en la red dejando que el driver de la luminaria trabaje en condiciones normales de utilización. Cuando hay un fallo de suministro eléctrico en la red,
el driver del kit de emergencia permite liberar la energía acumulada en la batería alimentando los LEDs.

¿Qué necesito?

Se necesita la luminaria compuesta de su driver y LEDs y un kit de emergencia. En cualquier caso, la batería de los Kit de emergencia debe de ir externa a la luminaria por lo que se debe de prever un espacio para su alojamiento

¿Cuántos kit de emergencia necesito?

Con un kit de emergencia se puede dar servicio a un solo driver de potencia inferior a 150W.
Si una luminaria lleva más de un driver y se requiere que se ilumine completamente se necesitarán tantos kits de emergencia como drivers lleve la luminaria. En este caso si sólo se coloca un kit se iluminará únicamente la parte de la luminaria que lleve asociado el driver con el kit de emergencia.

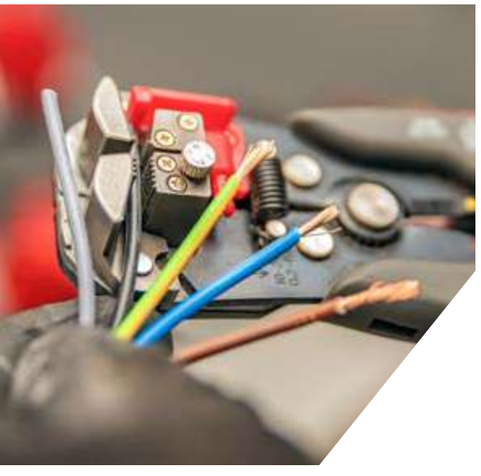

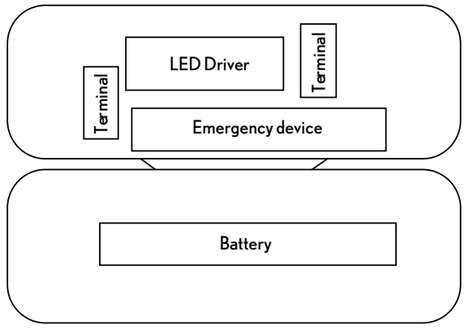

Are BPM light fixtures approved according to standard?

Please note that BPM Lighting luminaires are not in any case, emergency luminaires approved according to the EN-60598-2.22. Our emergency kits provide low anti-panic lighting for between one and three hours in case of a ma in power failure (see ref. ACKITLED1H and ref. ACKITLED3H).

¿Son las luminarias de BPM homologadas según la norma?

Las luminarias de BPM que llevan kit de emergencia en ningún caso son luminarias de emergencia homologadas según la norma
EN-60598-2-22. Los kits de emergencia suministrados permiten mantener una iluminación reducida antipánico, durante 1 o 3 horas en caso de fallos de suministro eléctrico de la red (ver ref. ACKITLED1H y ref. ACKITLED3H).

DIMMING OPTIONS

1..10V

How does it work?
The driver generates a 1V (minimum) to 10V (maximum) analogue signal a dimmer switch controller.
Dimming from 1 to 100%.
What do I need?
You need an L and N power source plus two control cables with + and – polarity and a compatible 1. 10V controller.
To switch off, install an ON-OFF switch with a 0.10V driver.
Can I dim the lights in more than one place?
It is not possible to control your lights from more than one point when you install a controller. A conventional switch can be used to switch on and off from several points, but only one of them can be a dimmer.

PHASE CUT

How does it work?
Lights are dimmed by cutting the mains voltage at the beginning (leading) or the end (trailing) of the phase.
Dimming: 10/20-100% depending on driver.
The driver may make a noise when dimmed and flickering can occur at the lowest levels.
What do I need?
You only need an L and N power source. An additional control cable is not required, but a phase cut-off regulator is.
The dimmer switch must be LED compatible. Always consider the compatibility of the dimmer switch with the driver and whether it is cutting at the trailing or leading end of the phase. The dimmer switch supplier can advise on compatibility.
Can I dim the lights in more than one place?
No. You cannot have more than one dimmer switch. You can only have one from a conventional ON-OFF switch (on and off only).

PUSH

How do they work?
The lights are dimmed with a switch, which is usually on. Press the push button quickly to turn the light on or off, and hold it in for the dimming function.
The range is from 1-5% to 100%.
Lighting may go out of synch when a single push button is used. It can usually be synchronised again by holding the button in for a specific time or using a pulse sequence determined by the driver.
What do I need?
All you need is a conventional push button without a pilot light.
No additional control pads are required.
PUSH dimmer switches require an L and N power supply plus an additional cable back to the push button. In some cases the driver needs an additional neutral input which must be bridged with the installation neutral.
Can I control my lights from more than one push button?
You can install several push buttons in a row for multi-point control. In this case, the wire back to the button must enter each driver in parallel and must not be bridged from driver to driver.
You can connect numerous lights to a single button, but the more lights you connect, the greater the risk of loss of synchronisation. The number of devices controlled by a push button depends on the driver (ask the technical team).

DALI

How does it work?
The Digital Addressable Lighting Interface (DALI) system allows you to control each DALI device. By device, we mean the driver and the sensor (not the luminaire). It uses a low-voltage bidirectional communication protocol to send and receive messages. DALI digitally controlled by a standard lighting control protocol under the IEC 62356 standard. Control from 1-5% to 100%
DALI keeps your lighting in sync.
Features:
DALI devices per BUS: 64
Number of DALI groups per BUS: 16
Number of DALI scenarios per BUS: 16
DALI Voltage: 9.5-22.5v, typically 16V
DALI system current: Max. 250 mA.
Maximum cable length: 300 m with a cross-section of 1.5 mm2
What do I need?
You need an L and N power supply plus two control signal wires. These control cables must be powered by a DALI BUS.
You also need regulators with DALI protocol support.
Can I dim the lights in more than one place?
There are two options: By means of DALI panels/interfaces directly connected to the DALI BUS that consume a DALI address for each panel placed and must be programmed; or through DALI dimmer switches that are connected to 230Vac and work by means of short presses to turn on/off and long presses to dim.

CÓMO REGULO?

1..10V

¿Cómo funciona?
El driver genera una señal analógica de 1V (mínimo) a 10V (máximo que llega a un controlador que regula la intensidad lumínica).
Regulación del 1 al 100%.
¿Qué necesito?
Se necesita una alimentación L y N más dos cables de control con polaridad + y – y un controlador compatible 1..10V
Si se quiere apagar se necesita colocar un regulador con ON-OFF o bien regular mediante driver 0..10V.
¿Puedo regular desde varios puntos?
No es posible regular desde varios puntos cuando se coloca un controlador. Se puede utilizar un interruptor convencional conmutado de manera que se pueda encender y apagar desde varios puntos pero sólo uno de ellos podrá regular.

CORTE DE FASE

¿Cómo funciona?
La regulación se realiza mediante corte de la onda de la tensión de red al inicio (leading) o al final (trailing) de la fase.
Regulación: 10/20-100% dependiendo del driver.
Puede generar ruido en el driver y al regular la intensidad al mínimo puede general flickering.
¿Qué necesito?
Sólo necesita alimentación L y N. No necesita cable adicional de control, pero sí un regulador de corte de fase.
El regulador debe de ser compatible con LED. Se debe de tener en cuenta la compatibilidad del regulador con el driver y si es corte por trailing o leading. Dicha compatibilidad la dará el proveedor del regulador.
¿Puedo regular desde varios puntos?
No se puede regular desde varios puntos. Sólo se puede regular desde un punto y conmutar el ON-OFF desde el interruptor convencional (sólo para encender y apagar).

PUSH

¿Cómo funciona?
Regulación a través de un pulsador normalmente abierto. La regulación se realiza con pulsaciones cortas para apagar/encender
y una pulsación mantenida para el control de la intensidad lumínica.
Regulación del 1-5% al 100%.
Puede aparecer desincronización en la regulación de las luminarias con un solo pulsador. Se suele re-sincronizar generalmente
con una pulsación mantenida durante un tiempo determinado o con una secuencia de pulsación determinada según el driver.
¿Qué necesito?
Se requiere de pulsadores convencionales sin piloto de luz y no necesita ningún tipo de pastilla de regulación adicional.
La regulación PUSH necesita de alimentación L y N más un cable adicional de vuelta al pulsador. En algunos casos el driver
puede necesitar una entrada adicional de neutro que debe de puentearse con el neutro de la instalación.
¿Puedo regular desde varios puntos?
Es posible colocar varios pulsadores en paralelo para control desde varios puntos. En este caso, el cable de vuelta al pulsador debe entrar a cada driver en paralelo y no se debe de puentear de un driver a otro.
Es posible colocar varios equipos a un mismo pulsador, pero a mayor cantidad de equipos mayor riesgo de desincronización.
El número de equipos soportados por un pulsador dependerá del driver (Consultar con el equipo técnico).

DALI

¿Cómo funciona?
El sistema de regulación DALI (Digital Adresable Lighting Interface) permite el control de cada dispositivo DALI. Se entiende por dispositivo el driver y el sensor (no la luminaria). Utiliza un protocolo de comunicación bidireccional de bajo voltaje que permite enviar y recibir mensajes.
Se regula de forma digital mediante un protocolo estándar de control de iluminación bajo el estándar IEC 62356. Regulación del 1-5% al 100%
Con DALI se evita cualquier tipo de desincronización.
Características:
Dispositivos DALI por cada BUS: 64
Cantidad de grupos DALI por cada BUS: 16
Cantidad de escenas DALI por cada BUS: 16
Tensión DALI: 9.5-22.5v, normalmente 16V
Corriente del sistema DALI: máx. 250mA.
Máxima longitud del cable: 300m con una sección transversal de 1.5mm2
¿Qué necesito?
Necesita alimentación L y N más dos cables de señal de control.
Estos cables de control deben de estar alimentados mediante un BUS DALI.
Además, son necesarios reguladores que deben de indicar su compatibilidad con protocolo DALI.
¿Puedo regular desde varios puntos?
Existen dos opciones: Mediante paneles/interfaces DALI conectados directamente al BUS DALI que consumen una dirección DALI por cada panel colocado y que deben de ser programados; o a través de interruptores reguladores DALI que van conectados a 230VaC y funcionan mediante pulsaciones cortas para encender/ apagar y pulsaciones mantenidas para regular.

TECH RECOMENDATIONS
RECOMENDACIONES TÉCNICAS

PUSH: OPTION 1



PUSH: OPTION 2

DALI



1-10 V



PHASE CUT

As IEC 60529 standard says, the IP protection degree specifies the different protection levels provided by the containers that protect the components in electrical or electronic equipment. The greater the IP protection degree, the more protected the equipment is.
An IP XY protection degree indicates the following:

Según la Norma IEC 60529, el grado de protección IP especifica los diferentes niveles de protección aportados por los contenedores que resguardan los componentes de los equipos eléctricos o electrónicos. Cuanto mayor es el grado de protección IP, más protegido está el equipamiento. Un grado de protección IP XY indica lo siguiente:

X: Describes the level of protection against dust and other particles / Describe el nivel de protección contra polvo y otras partículas

X	**Protection grade against dust /** *Grado de protección contra polvo*
0	Without protection / *Sin protección*
1	Protected against solids bigger than 50 mm / *Protegida contra sólidos de más de 50 mm*
2	Protected against solids bigger than 12 mm / *Protegida contra sólidos de más de 12 mm*
3	Protected against solids bigger than 2,5 mm / *Protegida contra sólidos de más de 2,5 mm*
4	Protected against solids bigger than 1 mm / *Protegida contra sólidos de más de 1 mm*
5	Protection against the entrance of dust / *Protegida contra la entrada de polvo*
6	Full protected against dust / *Totalmente protegida del polvo*

Y: Describes the level against liquids / Describe el nivel de protección contra líquidos

Y	**Protection grade against liquids /** *Grado de protección contra líquidos*
0	Without protection / *Sin protección*
1	Protected against drops of water falling vertically / *Protegida contra la caída vertical de gotas de agua*
2	Protected against drops of water falling at a maximum inclination of 15º *Protegida contra la caída de gotas de agua con una inclinación máxima de 15º*
3	Protected against sprayed water / *Protegida contra agua pulverizada*
4	Protected against splashes of water / *Protegida contra las proyecciones de agua*
5	Protected against jets of water / *Protegida contra los chorros de agua*
6	Protected against hide tide / *Protegida contra mar gruesa*
7	Protected against pluning effects / *Protegida contra los efectos de la inmersión*
8	Protected against long inmersion / *Protegida contra la inmersión prolongada*

*Specialized cleaning procedures are not covered by IP ratings. It is recommended that manufacturers provide, if necessary, adequate information regarding cleaning procedures. This is in accordance with the recommendations contained in IEC 60529 for special cleaning procedures.

**Los procedimientos especializados de limpieza no están cubiertos por los grados de protección IP. Se recomienda que los fabricantes suministren, si es necesario, una adecuada información en lo referente a los procedimientos de limpieza. Esto está de acuerdo con las recomendaciones contenidas en la Norma IEC 60529 para los procedimientos de limpieza especiales.*

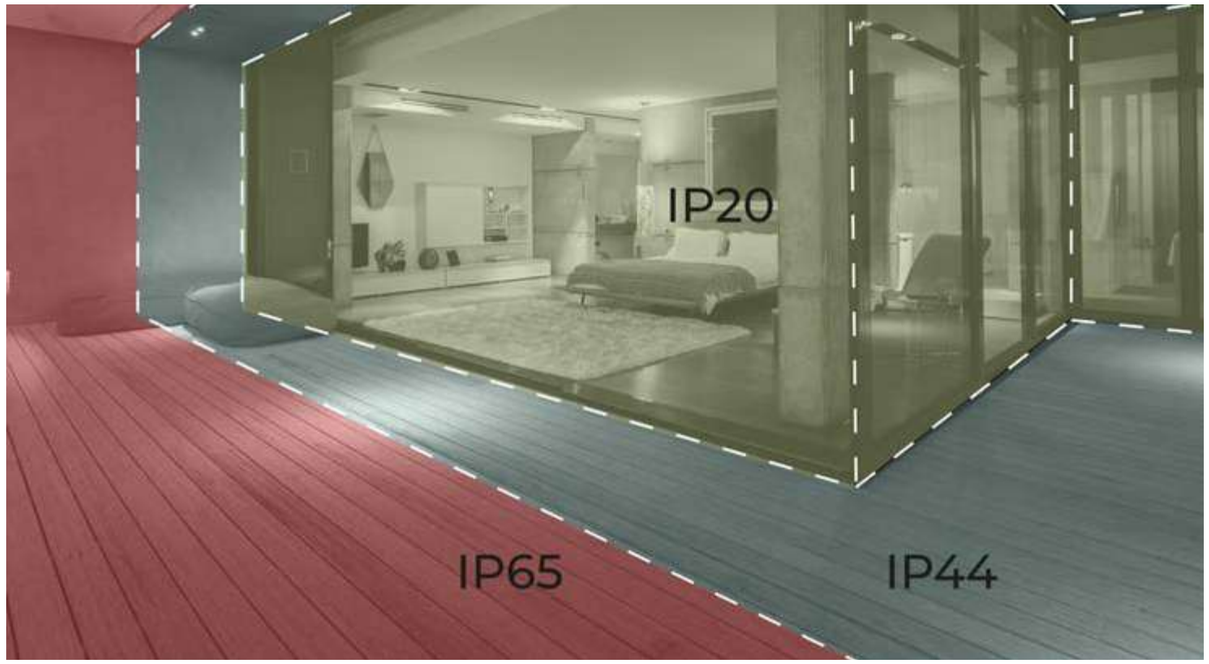

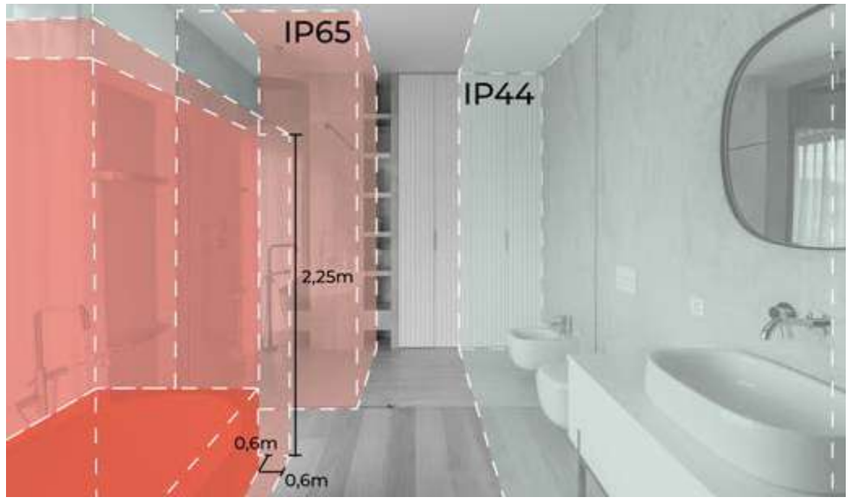

IP DEGREE OF PROTECTION
GRADO DE PROTECCIÓN IP

TECH RECOMENDATIONS
RECOMENDACIONES TÉCNICAS

IK DEGREE
GRADO IK

The degree of protection IK is an international numerical classification for the degrees of protection provided by enclosures of electrical equipment against external mechanical impacts. This provides a means of specifying the ability of an enclosure to protect its contents from shock.

El grado de protección IK es una clasificación numérica internacional para los grados de protección proporcionados por las envolventes de materiales eléctricos contra los impactos mecánicos externos. Esto proporciona un medio para especificar la capacidad de un recinto para proteger su contenido de los golpes.

IK DEGREE *GRADO IK*	PROTECTION AGAINST EXTERNAL MECHANICAL IMPACTS *PROTECCIÓN CONTRA IMPACTOS MECÁNICOS EXTERNOS*	DESCRIPTION *DESCRIPCIÓN*
IK00	No protection / *Sin proteger*	
IK01	Protected against 0.150J impact. *Protegido contra impacto de energía 0.150J.*	Resistant against an impact of an object of 200 grs launched from a distance of 7.5 cm. *Resistente contra un impacto de un objeto de 200 grs lanzado desde una distancia de 7,5 cm.*
IK02	Protected against 0.200J impact. *Protegido contra impacto de energía 0.200J.*	Resistant against an impact of an object of 200 grs launched from a distance of 10 cm. *Resistente contra un impacto de un objeto de 200 grs lanzado desde una distancia de 10 cm.*
IK03	Protected against 0.350J impact. *Protegido contra impacto de energía 0.350J.*	Resistant against an impact of an object of 200 grs launched from a distance of 17.5 cm. *Resistente contra un impacto de un objeto de 200 grs lanzado desde una distancia de 17,5 cm.*
IK04	Protected against 0.500J impact. *Protegido contra impacto de energía 0.500J.*	Resistant against an impact of an object of 200 grs launched from a distance of 25 cm. *Resistente contra un impacto de un objeto de 200 grs lanzado desde una distancia de 25 cm.*
IK05	Protected against 0.700J impact. *Protegido contra impacto de energía 0.700J.*	Resistant against an impact of an object of 200 grs launched from a distance of 35 cm. *Resistente contra un impacto de un objeto de 200 grs lanzado desde una distancia de 35 cm.*
IK06	Protected against 1.00J impact. *Protegido contra impacto de energía 1.00J.*	Resistant against an impact of an object of 500 grs launched from a distance of 20 cm. *Resistente contra un impacto de un objeto de 500 grs lanzado desde una distancia de 20 cm.*
IK07	Protected against 2.00J impact. *Protegido contra impacto de energía 2.00J.*	Resistant against an impact of an object of 500 grs launched from a distance of 40 cm. *Resistente contra un impacto de un objeto de 500 grs lanzado desde una distancia de 40 cm.*
IK08	Protected against 5.00J impact. *Protegido contra impacto de energía 5.00J.*	Resistant against an impact of an object of 1,7 kg launched from a distance of 29,5 cm. *Resistente contra un impacto de un objeto de 1,7 kg lanzado desde una distancia de 29,5 cm.*
IK09	Protected against 10.00J impact. *Protegido contra impacto de energía 10.00J.*	Resistant against an impact of an object of 5 kg launched from a distance of 20 cm. *Resistente contra un impacto de un objeto de 5 kg lanzado desde una distancia de 20 cm.*
IK10	Protected against 20.00J impact. *Protegido contra impacto de energía 20.00J.*	Resistant against an impact of an object of 5 kg launched from a distance of 40 cm. *Resistente contra un impacto de un objeto de 5 kg lanzado desde una distancia de 40 cm.*

CLASS PROTECTION
CLASES DE PROTECCIÓN



Class I:

Light fittings in which protection against electric shocks does not depend solely on the mains insulation, but instead contain an extra safety measure in the form of a circuit from the accessible conductive parts with an grounded protective conductor forming part of the installation's fixed wiring, so that the accessible conductive parts do not become dangerous should there be a defect in the mains insulation. Ground conductor is coloured green&yellow in most countries, and just green in the U.S., Canada and Japan.

Clase I:

Luminarias en la que la protección contra los choques eléctricos no recae exclusivamente sobre el aislamiento principal, sino que comprende una medida de seguridad suplementaria bajo la forma de medios de conexión de las partes conductoras accesibles con un conductor de protección puesto a tierra, formando parte del cableado fijo de la instalación, de tal manera que las partes conductoras accesibles no puedan llegar a ser peligrosas, en caso de defecto del aislamiento principal. La toma tierra es de color amarillo y verde en la mayoría de los países, y verde en los Estados Unidos, Canadá y Japón.



Class II:

A Class II or double insulated electrical appliance is one which has been designed in such a way that it does not require a safety connection to electrical ground. The basic requirement is that no single failure can result in dangerous voltage becoming exposed so that it might cause an electric shock and that this is achieved without relying on an earthed metal casing. This is achieved having two layers of insulating material surrounding live parts or by using reinforced insulation.

Clase II:

Dispositivo de Clase II o aparato con doble aislamiento eléctrico es uno que ha sido diseñado de tal forma que no requiere una toma a tierra de seguridad eléctrica. El requisito básico es que un fallo simple no puede dar lugar a tensiones peligrosas que puedan causar una descarga eléctrica. Esto se consigue mediante dos capas de material aislante rodeando las partes con tensiones peligrosas o utilizando un aislamiento reforzado.



Class III:

A Class III appliance is designed to be supplied from a separated/safety extra-low voltage (SELV) power source. The voltage from a SELV supply is low enough that under normal conditions a person can safely come into contact with it without risk of electrical shock. The extra safety features built into Class I and Class II appliances are therefore not required. For medical devices compliance with Class III is not considered sufficient protection.

Clase III:

Un aparato de Clase III está diseñado para ser alimentado por una fuente de alimentación SELV (por sus siglas en inglés: "Separated or Safety Extra-Low Voltage"). La tensión de una fuente de SELV es lo suficientemente baja para que, en condiciones normales, una persona puede entrar en contacto con ella sin correr el riesgo de descarga eléctrica. Por tanto, no es necesario incorporar la seguridad que llevan los aparatos de Clase I y Clase II. Para el cumplimiento de los dispositivos médicos la Clase III no se considera suficiente para su protección.

GENERAL TERMS AND CONDITIONS OF SALE

All orders must be placed with BPM Iluminación S.L in writing by email, and customers hereby accept the terms and conditions detailed below. Goods supplied by the Company shall remain the property of BPM Iluminación S.L until payment is received, even if the goods have been sold to a third party. Delivery times are approximate and non-binding. BPM Iluminación S.L will not accept claims for damages due to late delivery. BPM Iluminación S.L reserves the right to amend, supplement or delete, without prior warning, the characteristics or designs of the products in this catalogue, as well as the corresponding prices. Therefore, customers are advised to contact BPM Iluminación S.L directly for the latest information. BPM Iluminación S.L is not responsible for the loss or damage of goods during transport by agencies. In accordance with Article 1 of Royal Decree 5/1997 of 14 January, complaint forms are available to our customers at the Company's registered office.

CANCELLING AN ORDER

Orders must be cancelled in writing and sent to BPM Iluminación S.L by email. If the order has already been dispatched, please request a refund, in accordance with the terms and conditions detailed in the following section.

RETURNING GOODS BPM

Lighting reserves the right to accept or reject return requests received. Returns must be made within 2 weeks of the invoice date, and a minimum depreciation rate of 5% will be applied to cover handling costs.

RETURN TERMS AND CONDITIONS

Return requests must be made in writing by email. Please send all returns correspondence to the following email address: info@bpmlighting.com. In order to submit a request, please use the returns form provided by BPM Iluminación S.L, stating, at the very least, the reason for the return, article reference number(s), quantity, item condition, date and invoice number. If the return is authorised: The item must be returned in its original packaging and in perfect condition. BPM Iluminación S.L must receive the goods within a maximum of 10 days after the return has been authorised. Any costs for returning the goods are the responsibility of the customer. Returned goods will not be accepted in the case of discontinued or customised items (manufactured specifically for the customer). Please send the item, together with the documentation required by the Sales Department, to the following address: Partida Madrigueres Sud, 11, 03700 Dénia (Alicante), Spain.

WARRANTY

BPM Iluminación S.L guarantees its luminaires and all the components it distributes.

1. BPM Iluminación S.L products are guaranteed against any manufacturing defects (components and labor) for a period of 5 years from the date of purchase.

2. On the basis of this warranty, BPM Iluminación S.L. is only obligued to repair or replace the product or defective part returned to BPM Iluminación S.L.

3. In any case, the guarantee does not include installation, assembly or disassembly costs....

The warranty period starts from the date of issue of the original invoice from BPM Iluminación S.L, and under no circumstances shall it be renewed by replacing a component in a repair or by replacing the complete item.

WARRANTY TERMS AND CONDITIONS

Incident claims (for products that are damaged, faulty, incorrect, or any other cause for complaint upon delivery) must be made in writing by email. Please send all incident claims to the following email address: info@bpmlighting.com. In order to submit an incident claim, please use the incident form provided by BPM Iluminación S.L, stating, at the very least, the reason for the incident, article reference number(s), quantity, date and invoice number. If the incident claim is authorised by invoking the warranty: The Sales Department will provide an incident code to process the claim. Please send the item, together with the documentation required by the Sales Department and the incident code, to the following address: Partida Madrigueres Sud, 11, 03700 Dénia (Alicante), Spain. Once BPM Iluminación S.L has authorised the collection of the item due to an incident, and once the Technical Department has verified that BPM Iluminación S.L is responsible for the source of the incident, the postage will be covered by BPM Iluminación S.L. These warranty terms and conditions do not affect the consumer's statutory rights under the current applicable legislation.

WARRANTY INVALIDATION CLAUSES

Improper use, handling or maintenance of a device, luminaire or component by the customer.
Improper repair, modification or extension of a luminaire or device by the customer.
Deterioration, removal or concealment of the BPM Iluminación S.L identification label by the customer. In any event, the warranty shall not be valid for items with obvious signs of improper handling.
Defects and damage caused by external events, accidents (in particular electrical accidents), wear and tear, and use not in accordance with BPM Iluminación S.L's instructions are excluded from any warranty.
BPM Iluminación S.L is not responsible for any product errors or breakages during shipping. - If a defect or breakage is not approved by BPM Iluminación S.L's Technical Department, the item will be returned cash on delivery.

SALES CONDITIONS

CONDICIONES GENERALES DE VENTA

Todos los pedidos deberán ser formulados a BPM Iluminación S.L. por escrito vía e-mail, quedando aceptadas por el cliente las condiciones escritas a continuación.
La mercancía suministrada por la Empresa, será propiedad de BPM Iluminación S.L. hasta el momento de pago, aunque dicha mercancía hubiese sido vendida a un tercero.
Los plazos de entrega son aproximados y sin compromiso. BPM Iluminación S.L. no aceptará demandas por daños y perjuicios por la demora en la entrega.
BPM Iluminación S.L. se reserva el derecho de modificar, complementar o suprimir, sin previo aviso, las características o diseños de los productos presentes en este catálogo, así como sus correspondientes tarifas. Por este motivo, se recomienda al cliente ponerse en contacto directamente con BPM Iluminación S.L. para obtener una información actualizada.
La pérdida o deterioro de la mercancía durante el transporte por agencia no es responsabilidad de BPM Iluminación S.L.
De acuerdo con el art. 1 del RD 5/1997 14 Enero, existen a disposición de nuestros clientes hojas de reclamación en el domicilio social de la Empresa.

ANULACIÓN DE PEDIDOS

Las anulaciones de pedidos deberán hacerse por escrito y notificarse a BPM Iluminación S.L. vía e-mail. En caso de que el pedido ya se hubiese enviado, deberá solicitarse la devolución del mismo, acogiéndose a las condiciones detalladas en el siguiente apartado.

DEVOLUCIÓN DE MERCANCÍA

BPM Iluminación S.L. se reserva el derecho de autorizar y aceptar las solicitudes de devolución recibidas. En cualquier caso, se requerirá que no hayan transcurrido 15 días desde la fecha de la factura, y se aplicará una depreciación mínima del 5% por los costes de gestión.

CONDICIONES DE DEVOLUCIÓN

La solicitud de devolución deberá formalizarse por escrito vía e-mail.
Las devoluciones deberán tramitarse en la siguiente dirección de correo: info@bpmlighting.com.

Para presentar la solicitud deberá utilizarse el formulario de devolución habilitado por BPM Iluminación S.L., donde se hará constar, al menos, el motivo de la devolución, referencia de artículo/s, cantidad, estado del material, fecha y número de factura.
En el caso de que la devolución fuera autorizada:
El material deberá devolverse en su embalaje original y en perfecto estado de conservación.
BPM Iluminación S.L. deberá recibir la mercancía en un plazo máximo de 10 días desde la autorización de la devolución.
Los portes de la devolución serán asumidos por el cliente.
No se admitirán devoluciones de mercancía en el caso de material descatalogado o customizado (fabricado expresamente para el cliente).
El material deberá ser enviado, junto con la documentación requerida por el Área Comercial, a la siguiente dirección: Partida Madrigueres Sud, 11, 03700 Dénia (Alicante).

GARANTÍA

BPM Iluminación S.L. garantiza sus luminarias, así como los equipos que distribuye.

1 - Los productos de BPM Iluminación, S.L. están garantizados contra cualquier defecto de fabricación (componentes y mano de obra) durante un periodo de 5 años a partir de la fecha de compra.

2 - En razón de esta garantía, sólo incumbe a BPM Iluminación, S.L. la obligación de reparar o reemplazar el producto, o la pieza reconocidos como defectuosos y devueltos a BPM Iluminación, S.L.

3 - En cualquier caso, la garantía no incluye los gastos de instalación, montaje o desmontaje....

El plazo de garantía se inicia a partir de la fecha de emisión de factura originaria de BPM Iluminación S.L., no pudiendo ser renovado en ningún caso por sustitución de un componente en una reparación o reposición del artículo completo.

CONDICIONES DE GARANTÍA

La reclamación por incidencia (que el producto se entregue deteriorado, averiado, equivocado, o cualquier otra causa susceptible de reclamación), deberá formalizarse por escrito vía e-mail.
Las reclamaciones por incidencia deberán tramitarse en la siguiente dirección de correo: info@bpmlighting.com.

Para presentar la reclamación de incidencia deberá utilizarse el formulario de incidencia habilitado por BPM Iluminación S.L., donde se hará constar, al menos, el motivo de la incidencia, referencia de artículo/s, cantidad, fecha y número de factura.
En el caso de que la reclamación por incidencia fuera autorizada invocando la garantía:

El Área Comercial proporcionará un código de incidencia para la tramitación. El material deberá ser enviado, junto con la documentación requerida por el Área Comercial, con referencia al código de incidencia facilitado, a la siguiente dirección: Partida Madrigueres Sud, 11, 03700 Dénia (Alicante).

Autorizada por BPM Iluminación S.L. la recogida del material por incidencia, y una vez verificada por el Área Técnica la responsabilidad del origen de la incidencia de BPM Iluminación S.L. , los portes serán asumidos por BPM Iluminación S.L. .
Estas condiciones de garantía no afectan a los derechos estatutarios del consumidor amparados por la legislación vigente aplicable.

CLÁUSULAS DE ANULACIÓN DE LA GARANTÍA

Incorrecta utilización, manipulación o mantenimiento por parte del cliente de un equipo, luminaria o componente.
Incorrecta reparación, modificación o ampliación por parte del cliente de una luminaria o un equipo.
Deterioro, eliminación u ocultación, por parte del cliente, de la etiqueta identificativa de BPM Iluminación S.L.
En cualquier caso, no se asumirá la garantía del material con muestras evidentes de una manipulación incorrecta.
Quedan excluidos de toda garantía los defectos y deterioros producidos por hechos externos, accidentes, principalmente accidentes eléctricos, por desgaste y por utilización no conforme a las instrucciones de BPM Iluminación S.L.
BPM Iluminación S.L. no se responsabiliza de los errores o roturas producidas en el envío del producto.
En caso de defecto o rotura no validada por el Área Técnica de BPM Iluminación S.L., se procederá a la devolución del material a portes debidos.

CONDICIONES DE VENTA

Let's get brighter, let's co-create, let us support you step by step, because our goal is to help you design the perfect lighting solution for your project.

Co-creemos, déjanos ayudarte con lo que mejor sabemos hacer, luz, porque nuestro objetivo es diseñar la perfecta solución lumínica para tu proyecto.

BPMLighting®

ALARIK SLIM COMPOSITION | BUSINESS HUB VISUALIZATION
ARCHITECTURE: IN COLLABORATION WITH CRYSTALZOO

Scan to find out more detail about our products
Escanea y descubre todo sobre nuestros productos

BPM Lighting S.L. reserves the right to reproduce total or partially this catalogue as Copyright owner.
The content its up to date at the day of print, nevertheless, due to continuous product development and improvement, BPM Lighting reserves the right to alter it without prior notice.
Last catalogue version in **bpmlighting.com**

BPM Lighting S.L. se reserva el derecho de reproducción total o parcial de este catálogo como propietario del Copyright.
El contenido está actualizado en la fecha de impresión, sin embargo, debido al continuo desarrollo y mejora de los productos, BPM Lighting se reserva el derecho de modificarlo sin previo aviso.
Última versión de catálogo en **bpmlighting.com**

BPM Lighting Copyright © 2022

Design and layout / Diseño y maquetación
BPM Lighting Team / Equipo BPM Lighting

BPMLighting®