

# OUTDOOR LIGHTING



**Z** Zambelis  
LIGHTS

# INDEX



01. PORTABLE | p.008-019

02. FLOOR & WALL | p.020-077

03. WALL | p.078-129

04. SPIKES | p.130-163

05. STEP | p.164-185

06. CEILING | p.186-199

07. INGROUND | p.200-213

08. WALL WASHER | p.214-221



## OUTDOOR LIGHTING



**Zambelis**  
LIGHTS

OUTDOOR LIGHTING



**E370** p.10



**E314** p.12



**E400** p.14



**E401** p.15



**E291** p.16



**E193** p.18



**E368** p.22



**E297** p.24



**E351** p.26



**E345** p.28



**E354** p.30



**E356** p.32



**E357** p.34



**E367** p.36



**E355** p.36



**E325** p.38



**E249** p.40



**E384** p.42



**E192** p.44



**E254** p.46



**E336** p.48



**E335** p.48



**E204** p.50



**E298** p.52



**E302** p.54



**E295** p.56



**E132** p.58



**E277** p.60



**E348** p.62



**E339** p.64



**E208** p.66



**E206** p.68



**E256** p.70



**E211** p.70



**E337** p.72



**E235-12D** p.74



**E250-12D** p.76



**E315** p.80



**E317** p.81



**E287** p.82



**E273** p.84



**E278** p.85



**E238** p.86



**E274** p.88



**E272** p.89



**E197** p.90



**E199** p.91



**E243** p.92



**E245** p.92



**E318** p.94



**E114** p.95



**E195** p.96



**E261** p.98



**E227** p.99



**E156** p.100



**E159** p.101



**E149** p.102



**E124** p.104



**E122** p.104



**E306** p.106



**E150** p.106



**E186** p.108



**E305** p.110



**E168** p.112



**E216** p.112



**E343** p.114



**E341** p.116



**E275** p.116



**E342** p.118



**E263** p.120



**E202** p.122



**E296** p.122



**E268** p.124



**E271** p.124



**E266** p.126



**E267** p.128



**E372** p.132



**E329** p.134



**E350** p.136



**E349** p.136



**E404** p.138



**E286** p.140



**E285** p.140



**E284** p.142

OUTDOOR LIGHTING



**E153** p.144



**E152** p.145



**E177-B** p.146



**E292** p.148



**E293** p.149



**E281** p.150



**E283** p.152



**E279** p.154



**E299** p.156



**E280** p.158



**E312** p.160



**E310** p.162



**E217** p.162



**E321** p.166



**E320** p.166



**E319** p.166



**E322** p.168



**E301** p.170



**E288** p.170



**E324** p.172



**E347** p.174



**E247-G** p.176



**E246-W** p.176




**E241-G** p.178



**E242-W** p.178



**E294** p.179



**E229** p.180



**E184** p.182



**E181** p.182



**E187** p.184



**E248** p.185



**E333** p.188



**S131** p.190



**S113** p.192



**E340** p.192



**E220** p.194



**E309** p.194



**E270** p.196



**E327** p.198



**E363** p.202



**E362** p.202



**E364** p.204



**Z69058-B** p.204



**E178** p.206



**E180** p.206



**E361** p.208



**E360** p.208




**E359** p.210



**E189** p.210



**E366** p.212



**E365** p.212



**E380** p.216



**E379** p.216



**E382** p.216



**E377** p.218





**E375** p.218

OUTDOOR LIGHTING



PORTABLE | p.008-019



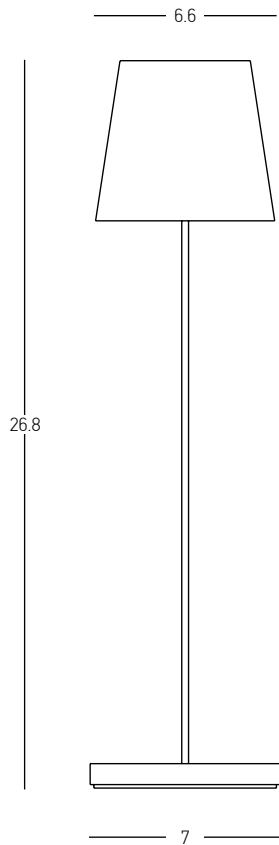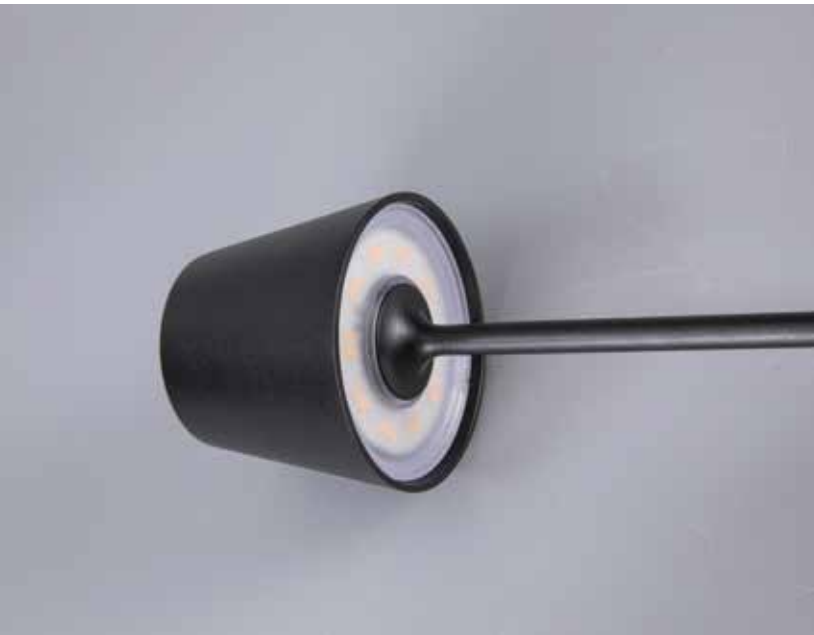

Power 1.5W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 125Lm  
Cri 80  
IP 54  
Dimensions Ø: 6.6cm H: 26.8cm  
3 Steps Dimming 10%, 50%, 100%  
Material Aluminium - PC Diffuser  
Special Feature Shade Ø: 6.6cm H: 5.9cm  
Portable Table Lamp  
Charging Base with USB Cable Included


Color Black / **Code E369**  
Color Brick / **Code E370**  
Color Sand / **Code E371**





Power 2W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 99Lm  
Cri 80  
IP 54  
Dimensions Ø: 12cm H: 32cm  
3 Steps Dimming 10%, 50%, 100%  
Material Aluminium - PC Diffuser  
Special Feature Portable Table Lamp  
USB Cable & Adaptor Included


Color Sandy Black / **Code E314**  
Color Sandy White / **Code E313**

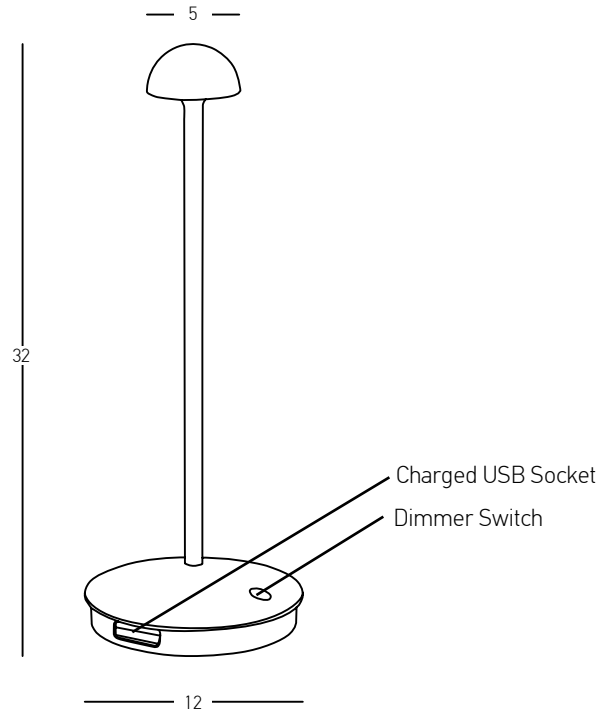



Power 2W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 168Lm  
Cri 80  
IP 44  
Dimensions Ø: 5.5cm H: 26.5cm  
3 Steps Dimming 10%, 50%, 100%  
Material Aluminium - PC Diffuser  
Special Feature Portable Table Lamp  
Charging Base with USB Cable Included

Color White / **Code E398**  
Color Black / **Code E399**  
Color Green / **Code E400**




Power 2W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 142Lm  
Cri 80  
IP 44  
Dimensions Ø: 11.8cm H: 10cm  
Shade Ø: 11.8cm H: 2cm  
3 Steps Dimming 10%, 50%, 100%  
Material Plastic  
Special Feature Portable Table Lamp  
USB Cable Included

Color White / **Code E401**  
Color Black / **Code E402**







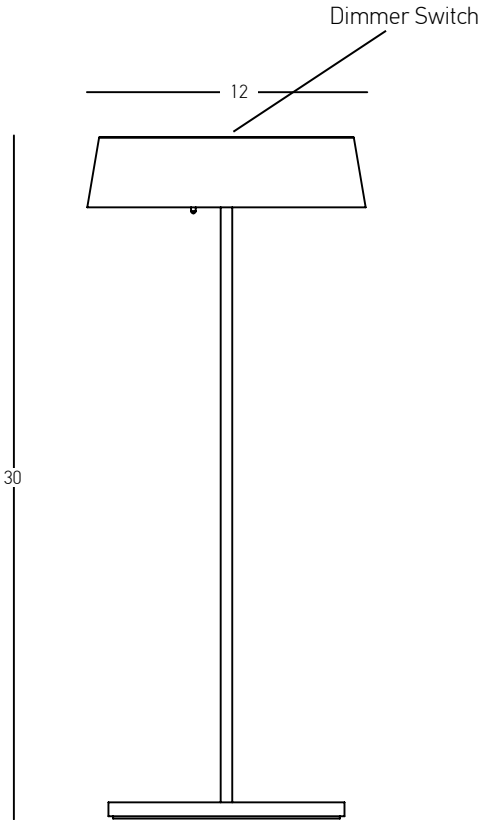

|                   |                                                                             |
|-------------------|-----------------------------------------------------------------------------|
| Power             | 2.2W                                                                        |
| Input             | 220-240V, 50/60Hz                                                           |
| Color Temperature | 3000K                                                                       |
| Lumen             | 210Lm                                                                       |
| Cri               | 80                                                                          |
| IP                | 54                                                                          |
| Dimensions        | Ø: 12cm H: 30cm                                                             |
| 3 Steps Dimming   | 10%, 50%, 100%                                                              |
| Material          | Aluminium - PC Diffuser                                                     |
| Special Feature   | Shade Ø: 12cm H: 5cm<br>Portable Table Lamp<br>USB Cable & Adaptor Included |
| Color             | Sandy Black / <b>Code E289</b>                                              |
| Color             | Sandy White / <b>Code E290</b>                                              |
| Color             | Gold Matt / <b>Code E291</b>                                                |





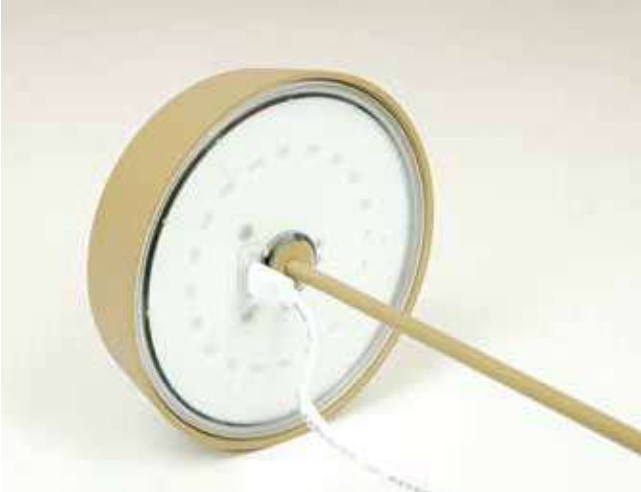







Power 2W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 260Lm  
Cri 80  
IP 54  
Dimensions Ø: 10.5cm H: 38cm  
Shade Ø: 11cm H: 11cm  
3 Steps Dimming 10%, 50%, 100%  
Material Aluminium - PC Diffuser  
Special Feature Portable Table Lamp  
USB Cable & Adaptor Included


Color Sandy White / **Code E193**  
Color Sandy Black / **Code E194**

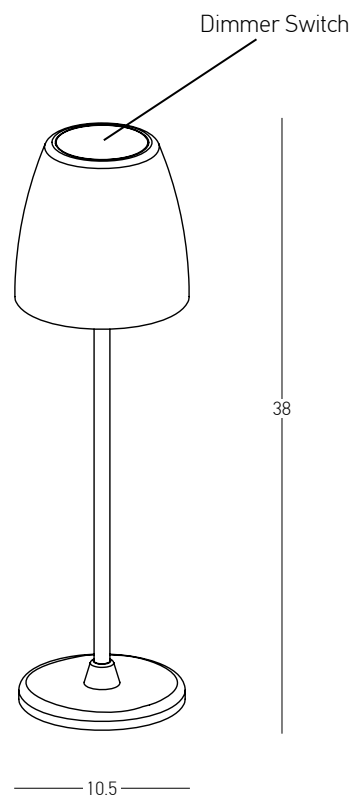

FLOOR & WALL | p.020-077




Power 13W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 638Lm  
Cri 80  
IP 65  
Dimensions L: 4.7cm W: 16.4cm H: 20cm  
Material Aluminium - Tempered Glass  
Color Graphite / **Code E353**

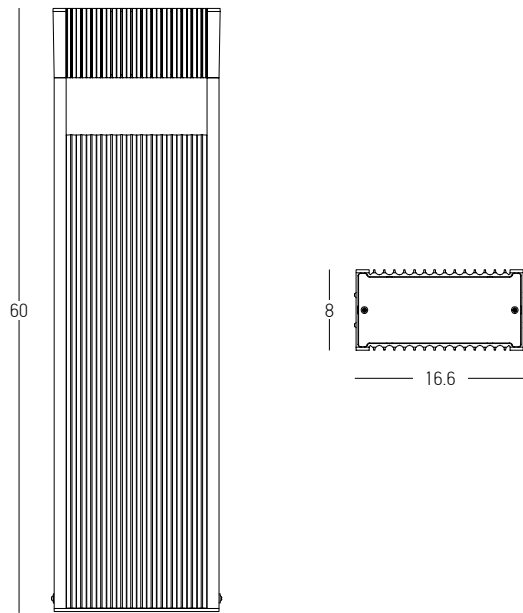


Power 30W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 986Lm  
Cri 80  
IP 65  
Dimensions L: 8m W: 16.6cm H: 60cm  
Material Aluminium - Tempered Glass  
Special Feature Double Sided Lighting  
Color Graphite / **Code E368**



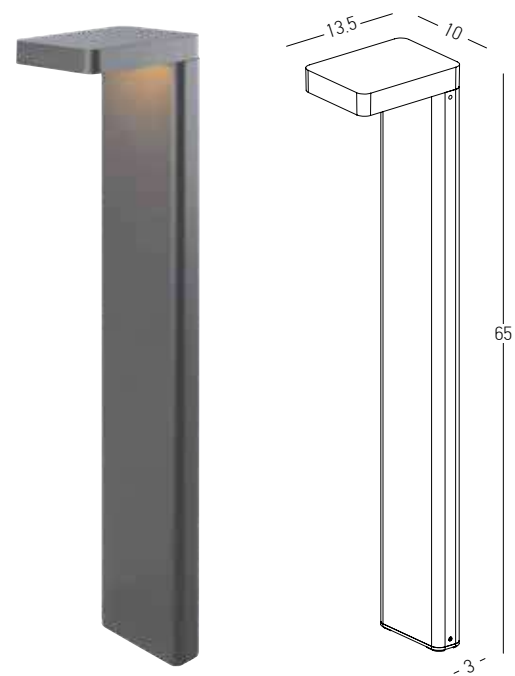


|                   |                             |
|-------------------|-----------------------------|
| Power             | 9W                          |
| Input             | 220-240V, 50/60Hz           |
| Color Temperature | 3000K                       |
| Lumen             | 710Lm                       |
| Cri               | 80                          |
| IP                | 54                          |
| Dimensions        | L: 13.5cm W: 10cm H: 65cm   |
| Beam Angle        | 120°                        |
| Material          | Aluminium - Tempered Glass  |
| Color             | Graphite / <b>Code E297</b> |






Power 13W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 767Lm  
Cri 80  
IP 65  
Dimensions L: 10cm W: 9cm H: 9cm  
Material Aluminium  
Special Feature Up - Down Lighting  
Color Graphite / **Code E352**

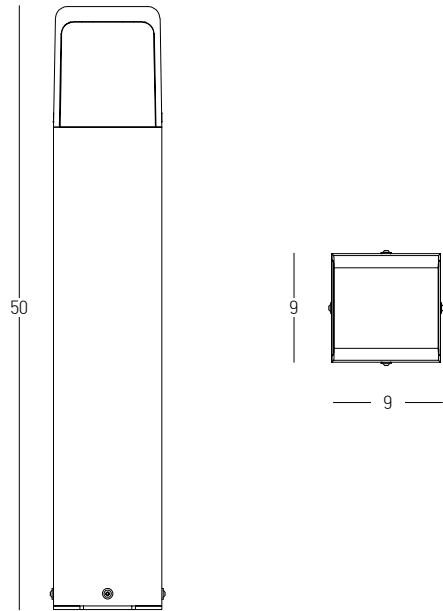


Power 13W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 767Lm  
Cri 80  
IP 65  
Dimensions L: 9cm W: 9cm H: 50cm  
Material Aluminium  
Special Feature Double Sided Lighting  
Color Graphite / **Code E351**



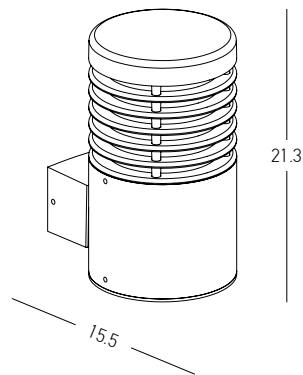


Power 10W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 919Lm  
Cri 80  
IP 65  
Dimensions Ø: 12cm L: 15.5cm H: 21.3cm  
Material Aluminium - PC Diffuser  
Color Graphite / **Code E344**

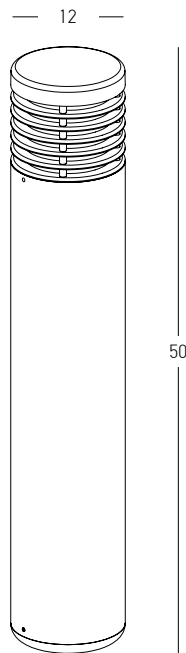


Power 10W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 923Lm  
Cri 80  
IP 65  
Dimensions Ø: 12cm H: 50cm  
Material Aluminium - PC Diffuser  
Color Graphite / **Code E345**



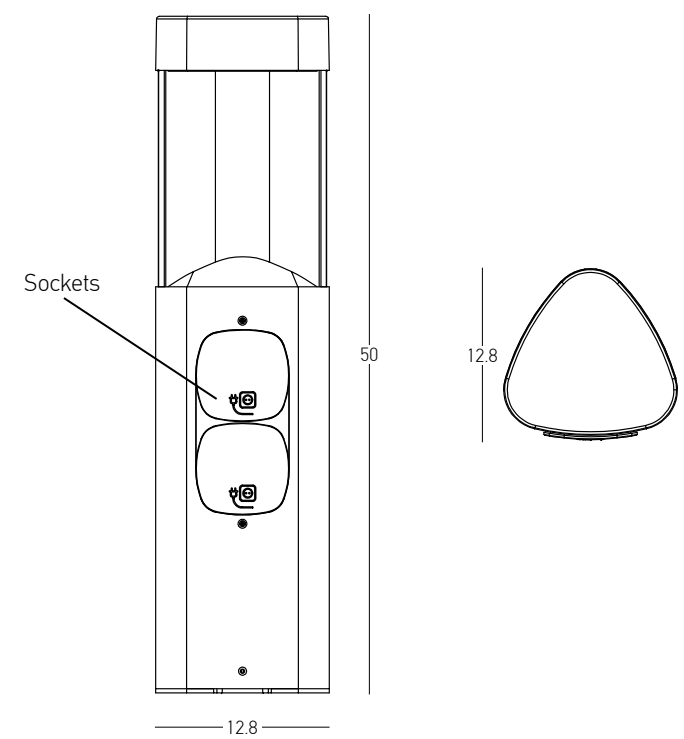



Power 7W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 639Lm  
Cri 80  
IP 54  
Dimensions L: 12.8cm W: 12.8cm H: 50cm  
Material Aluminium - PC Diffuser  
Special Feature 2 European Sockets 220-240V  
Color Graphite / **Code E354**



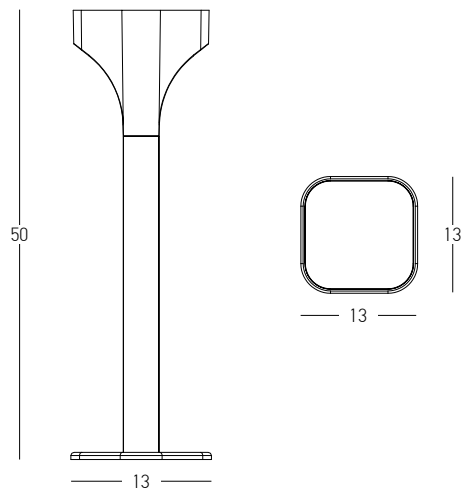


Power 11W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 993Lm  
Cri 80  
IP 65  
Dimensions L: 13cm W: 13cm H: 50cm  
Beam Angle 120°  
Material Aluminium - PC Diffuser  
Special Feature Double Sided Lighting  
Color Graphite / **Code E356**



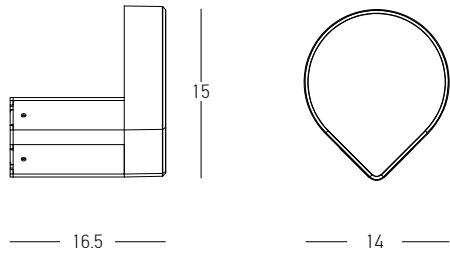


Power 13W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 1035Lm  
Cri 80  
IP 65  
Dimensions L: 16.5cm W: 14cm H: 15cm  
Beam Angle 120°  
Material Aluminium - PC Diffuser  
Color Graphite / **Code E358**

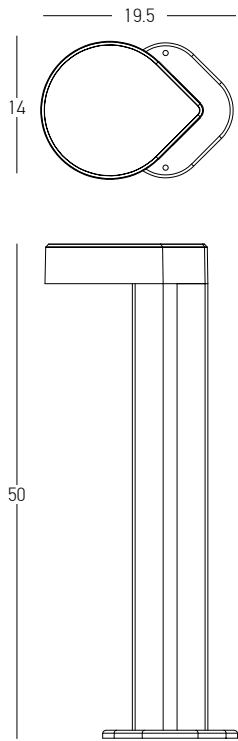


Power 13W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 1035Lm  
Cri 80  
IP 65  
Dimensions L: 19.5cm W: 14cm H: 50cm  
Beam Angle 120°  
Material Aluminium - PC Diffuser  
Color Graphite / **Code E357**



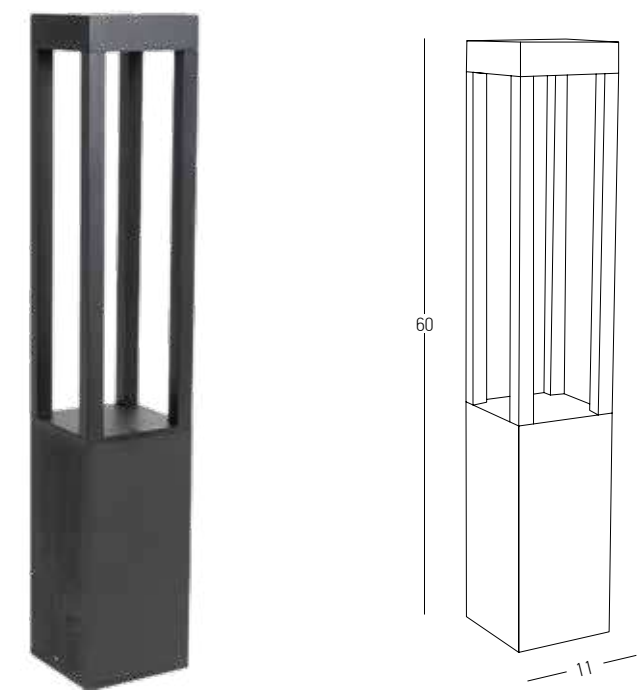


Power 7W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 658Lm  
Cri 80  
IP 67  
Dimensions L: 11cm W: 11cm H: 60cm  
Beam Angle 120°  
Material Aluminium - Clear Glass  
Color Graphite / **Code E367**

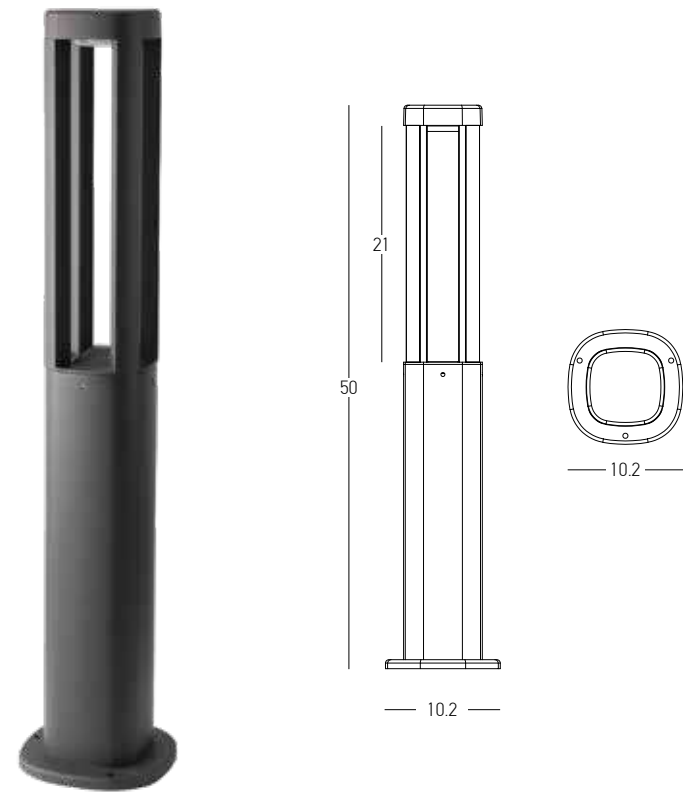


Power 7W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 533Lm  
Cri 80  
IP 54  
Dimensions L: 10.2cm W: 10.2cm H: 50cm  
Beam Angle 120°  
Material Aluminium - PC Diffuser  
Color Graphite / **Code E355**



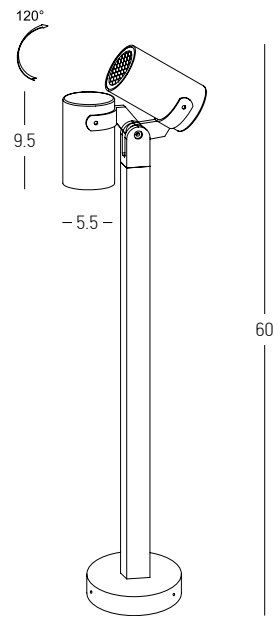


Bulb 1x GU10  
Power 15W MAX  
Input 220-240V, 50/60Hz  
IP 54  
Dimensions L: 11.5cm W: 5.5cm H: 60cm  
Base Ø: 11.5cm H: 3cm  
Spot Dimensions Ø: 5.5cm L: 9.5cm  
Material Aluminium - Tempered Glass  
Special Feature Movable Spot  
Honeycomb Included  
Color Graphite / **Code E325**






Power 12W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 920Lm  
Cri 80  
IP 54  
Dimensions Ø: 15cm L: 5.5cm  
Material Aluminium - PC Diffuser  
Color Graphite / **Code E237**




Power 11W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 792Lm  
Cri 80  
IP 65  
Dimensions Ø: 15cm H: 100cm  
Material Aluminium - PC Diffuser  
Color Graphite / **Code E249**



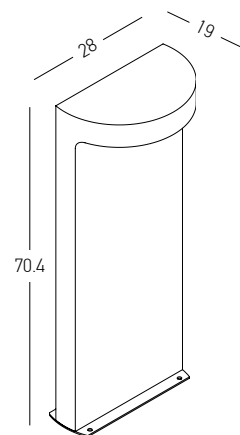


Power 8W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 490Lm  
Cri 80  
IP 65  
Dimensions L: 19cm W: 28cm H: 70.4cm  
Material Concrete  
Color Natural Concrete / **Code E383**

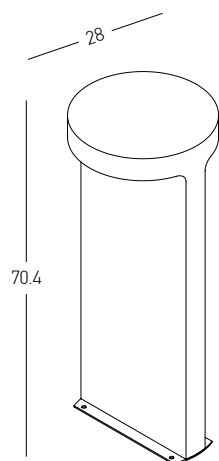


Power 2x 8W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 780Lm  
Cri 80  
IP 65  
Dimensions Ø: 28cm H: 70.4cm  
Material Concrete  
Color Natural Concrete / **Code E384**







Power 8W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 490Lm  
Cri 90  
IP 54  
Dimensions L: 15cm W: 16cm H: 30cm  
Base L: 21cm W: 23cm  
Material Concrete  
Color Natural Concrete / **Code E191**

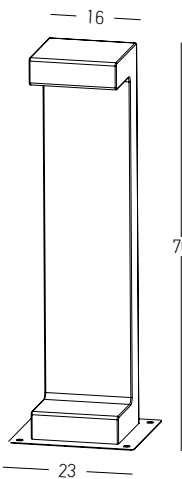


Power 8W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 490Lm  
Cri 90  
IP 54  
Dimensions L: 15cm W: 16cm H: 70cm  
Base L: 21cm W: 23cm  
Material Concrete  
Color Natural Concrete / **Code E192**




Power 8W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 490Lm  
Cri 90  
IP 54  
Dimensions L: 10cm W: 28cm H: 35cm  
Base L: 19cm W: 37cm  
Material Concrete  
Color Natural Concrete / **Code E190**






Power 4W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 340Lm  
Cri 80  
IP 65  
Dimensions L: 9.7cm W: 9.1cm H: 10.5cm  
Beam Angle 36°  
Dimmable Triac   
Material Concrete - Aluminium  
Color Natural Concrete / **Code E253**




Power 2x 4W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 600Lm  
Cri 80  
IP 65  
Dimensions L: 9.7cm W: 9.1cm H: 20cm  
Beam Angle 36°  
Dimmable Triac   
Material Concrete - Aluminium  
Color Natural Concrete / **Code E254**




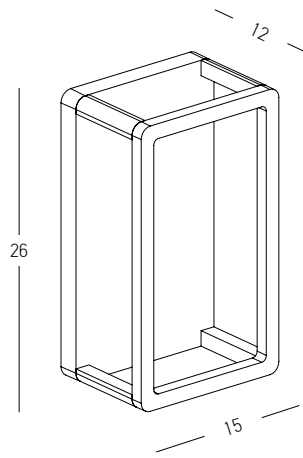


Power 8W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 481Lm  
Cri 80  
IP 65  
Dimensions L: 12cm W: 15cm H: 26cm  
Material Aluminium - PC Diffuser  
Color Graphite / **Code E336**




Power 8W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 587Lm  
Cri 80  
IP 65  
Dimensions L: 8.5cm W: 23cm H: 20cm  
Material Aluminium - Clear Glass  
Color Graphite / **Code E334**

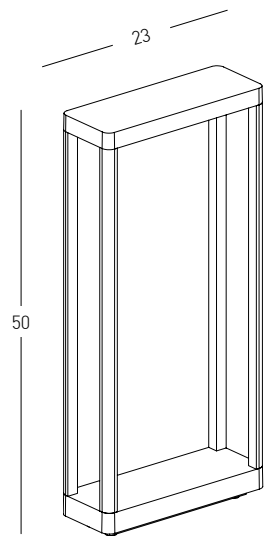

Power 8W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 587Lm  
Cri 80  
IP 65  
Dimensions L: 8.5cm W: 23cm H: 50cm  
Material Aluminium - Clear Glass  
Color Graphite / **Code E335**

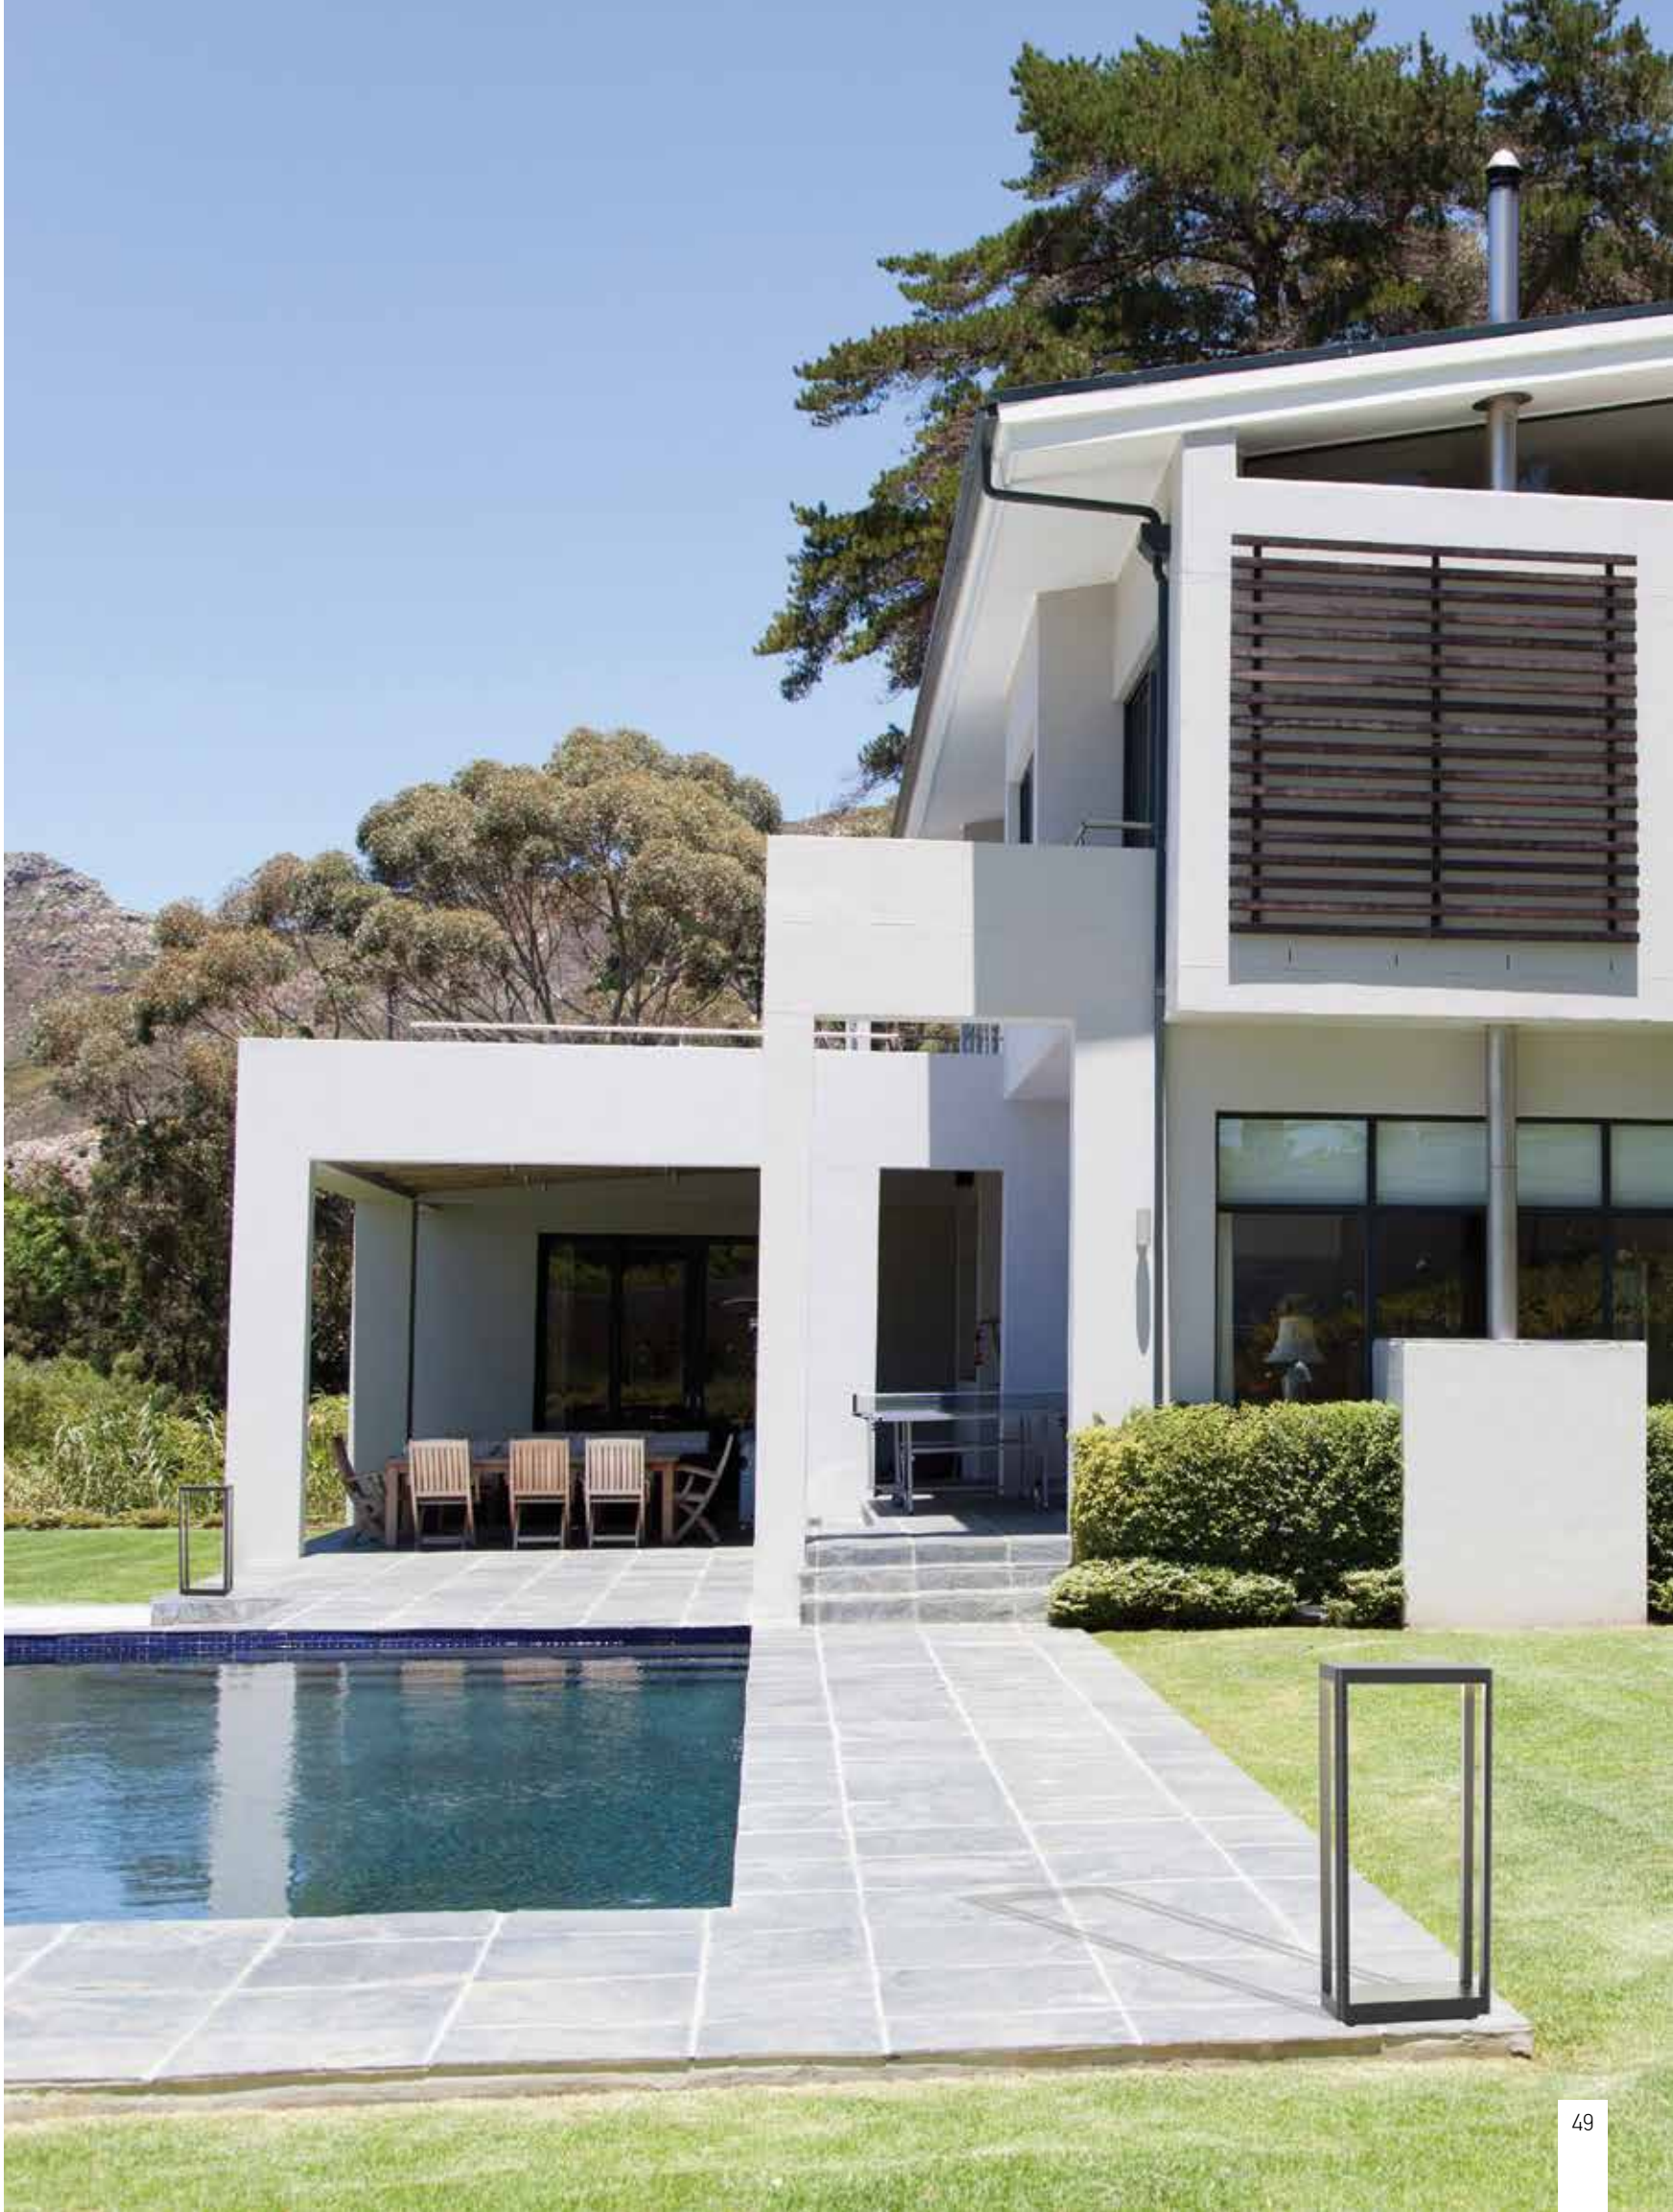




Power 9W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 704Lm  
Cri 80  
IP 54  
Dimensions L: 18cm W: 18cm H: 23cm  
Material Aluminium - Tempered Glass  
Color Graphite / **Code E203**



Power 9W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 704Lm  
Cri 80  
IP 54  
Dimensions L: 18cm W: 18cm H: 80cm  
Material Aluminium - Tempered Glass  
Color Graphite / **Code E204**



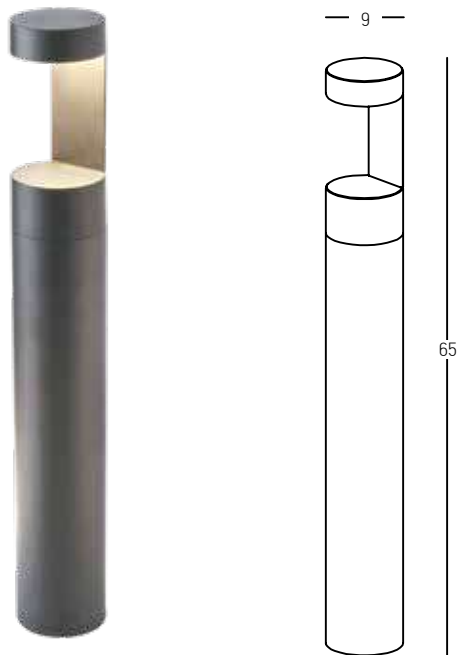


|                   |                             |
|-------------------|-----------------------------|
| Power             | 9W                          |
| Input             | 220-240V, 50/60Hz           |
| Color Temperature | 3000K                       |
| Lumen             | 1180Lm                      |
| Cri               | 90                          |
| IP                | 54                          |
| Dimensions        | Ø: 9cm H: 65cm              |
| Beam Angle        | 120°                        |
| Material          | Aluminium - Tempered Glass  |
| Color             | Graphite / <b>Code E298</b> |



IP 54


LED



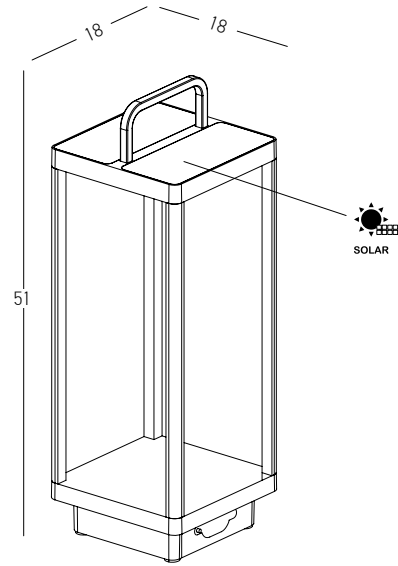


Power 3W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 390Lm  
Cri 80  
IP 54  
Dimensions L: 18cm W: 18cm H: 51  
Switch 1 Switch On/Off  
Material Aluminium - Tempered Glass  
Special Feature Solar Panel  
Portable Lamp  
USB Cable Included  
Color Graphite / **Code E302**



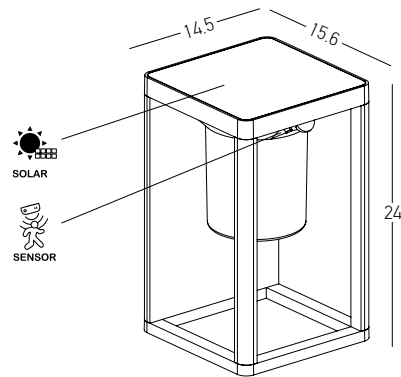


Power 2W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 210Lm  
Cri 80  
IP 65  
Dimensions L: 15.6cm W: 14.5cm H: 24cm  
Material Aluminium - PC Diffuser  
Special Feature Solar Panel  
3 Different Ways of Lighting  
Sense Distance 3 - 5m  
Color Graphite / **Code E295**







Power 12W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 867Lm  
Cri 80  
IP 54  
Dimensions Ø: 11cm H: 25cm  
Material Aluminium  
Color Graphite / **Code E133**




Power 3x 5W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 1117Lm  
Cri 80  
IP 54  
Dimensions Ø: 12cm H: 45cm  
Material Aluminium  
Color Graphite / **Code E132**



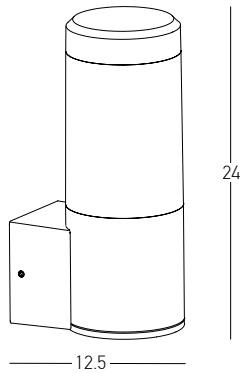


Power 10W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 990Lm  
Cri 80  
IP 54  
Dimensions L: 12.5cm W: 9cm H: 24cm  
Material Aluminium - PC Diffuser  
Color Graphite / **Code E276**

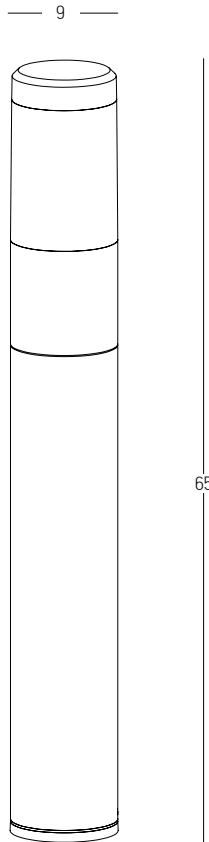


Power 10W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 993Lm  
Cri 80  
IP 54  
Dimensions Ø: 9cm H: 65cm  
Material Aluminium - PC Diffuser  
Color Graphite / **Code E277**






Power 17W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 1488Lm  
Cri 80  
IP 65  
Dimensions Ø: 16cm H: 220cm  
Material Aluminium - PC Diffuser  
Color Graphite / **Code E348**



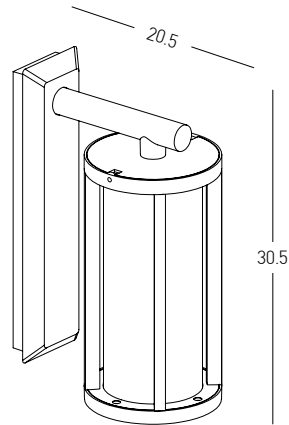


Bulb 1x E27  
Power 15W MAX  
Input 220-240V, 50/60Hz  
IP 65  
Dimensions L: 20.5cm W: 12.5cm H: 30.5cm  
Base L: 3cm W: 7.5cm H: 28.5cm  
Shade Dimensions Ø: 12.5cm H: 24cm  
Material Aluminium - Clear Diffuser  
Color Sandy Black / **Code E338**

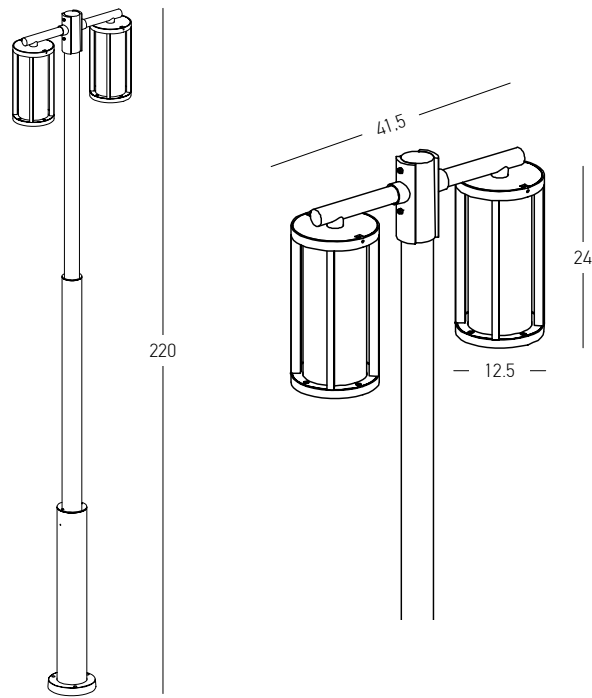


Bulb 2x E27  
Power 15W MAX  
Input 220-240V, 50/60Hz  
IP 65  
Dimensions L: 12.5cm W: 41.5cm H: 220cm  
Base Ø: 14.5cm H: 3cm  
Shade Dimensions Ø: 12.5cm H: 24cm  
Material Aluminium - Clear Diffuser  
Color Sandy Black / **Code E339**






Power 10W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 700Lm  
Cri 80  
IP 54  
Dimensions L: 12cm W: 15cm H: 5.5cm  
Material Aluminium - PC Diffuser  
Color Graphite / **Code E207**

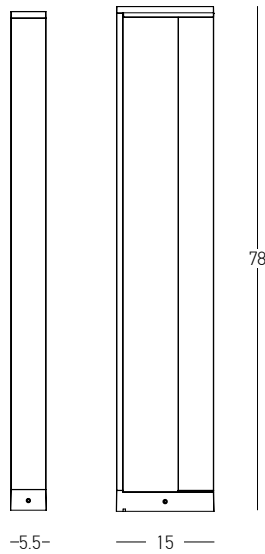


Power 9W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 653Lm  
Cri 80  
IP 54  
Dimensions L: 15cm W: 5.5cm H: 78cm  
Material Aluminium - PC Diffuser  
Color Graphite / **Code E208**






Power 9W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 785Lm  
Cri 80  
IP 54  
Dimensions L: 19.5cm W: 6cm H: 20.7cm  
Material Aluminium - PC Diffuser  
Color Graphite / **Code E205**

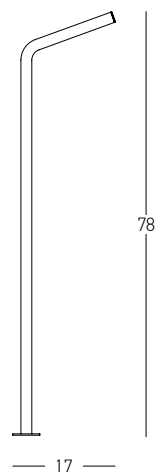


Power 9W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 785Lm  
Cri 80  
IP 54  
Dimensions L: 17cm W: 6cm H: 78cm  
Base W: 10cm L: 10cm  
Material Aluminium - PC Diffuser  
Color Graphite / **Code E206**




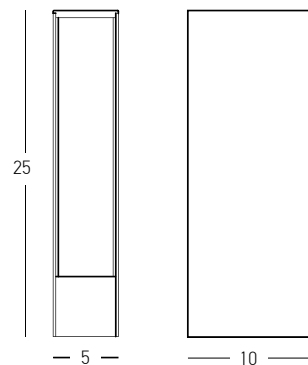

Power 6W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 480Lm  
Cri 80  
IP 65  
Dimensions L: 5cm W: 10cm H: 25  
Material Aluminium - PC Diffuser  
Color Rusty Brown / **Code E256**

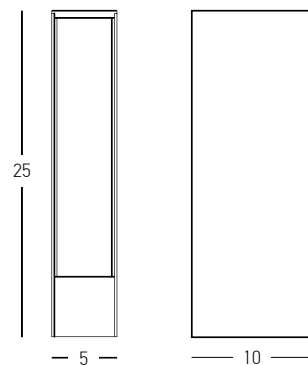


Power 9W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 720Lm  
Cri 80  
IP 65  
Dimensions L: 5cm W: 10cm H: 25  
Material Aluminium - PC Diffuser  
Special Feature Double Side Lighting  
Color Graphite / **Code E257**

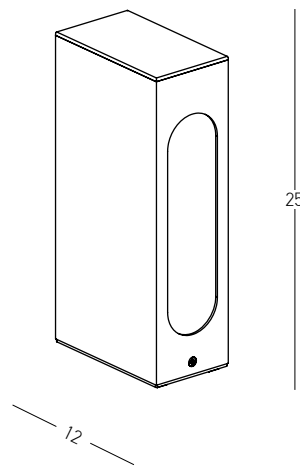


Power 7W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 560Lm  
Cri 80  
IP 54  
Dimensions L: 12cm W: 7cm H: 25cm  
Material Aluminium  
Color Graphite / **Code E211**



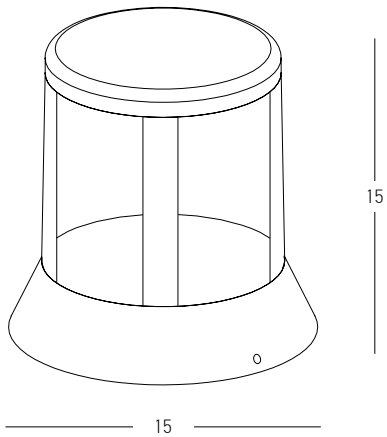

Power 8W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 557Lm  
Cri 80  
IP 65  
Dimensions Ø: 15cm H: 15cm  
Material Aluminium - Clear Diffuser  
Color Graphite / **Code E337**




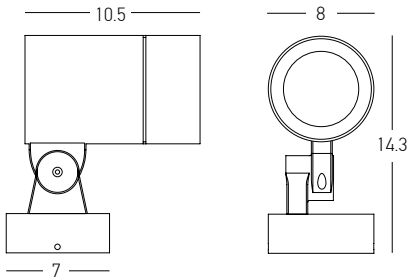

Bulb 1x GU10  
Power 11W MAX  
Input 220-240V, 50/60Hz  
IP 65  
Dimensions Ø: 8cm L: 14.3cm  
Base Ø: 7cm  
Material Aluminium - Tempered Glass  
Color Graphite / **Code E236**




Power 15W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 1243Lm  
Cri 80  
IP 65  
Dimensions Ø: 8cm L: 16.2cm  
Base Ø: 7cm  
Optic 32°  
Material Aluminium - Tempered Glass  
Color Graphite / **Code E235**

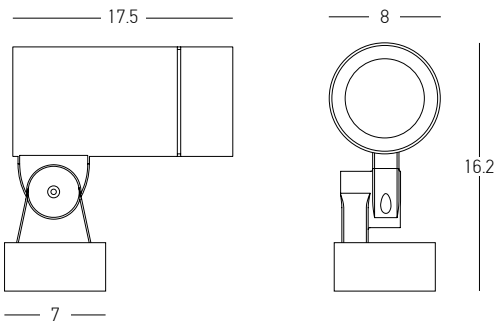

Power 15W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 1243Lm  
Cri 80  
IP 65  
Dimensions Ø: 8cm L: 16.2cm  
Base Ø: 7cm  
Optic 12°  
Material Aluminium - Tempered Glass  
Color Graphite / **Code E235-12D**





Power 4x 2.5W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 720Lm  
Cri 80  
IP 54  
Dimensions L: 17cm W: 5.5cm H: 9cm  
Optic 38°  
Material Aluminium - Tempered Glass  
Color Dark Grey / **Code E250**




Power 4x 2.5W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 720Lm  
Cri 80  
IP 54  
Dimensions L: 17cm W: 5.5cm H: 9cm  
Optic 12°  
Material Aluminium - Tempered Glass  
Color Dark Grey / **Code E250-12D**




**Wall / Ground Base**  
Material Aluminium  
Color Dark Grey / **Code E251**




WALL | p.078-129

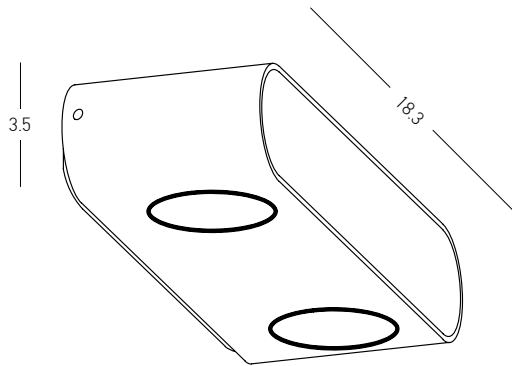

Power 10W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 775Lm  
Cri 90  
IP 54  
Dimensions L: 6.5cm W: 18.3cm H: 3.5cm  
Material Aluminium - Tempered Glass  
Special Feature Up - Down Lighting  
Color Graphite / **Code E315**

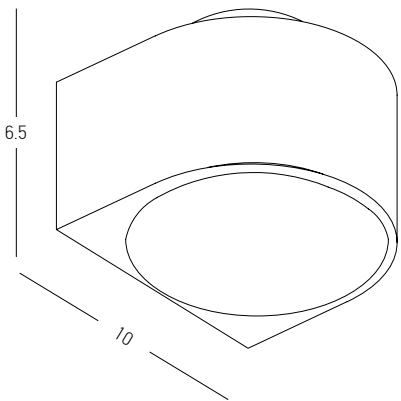


Power 2x 5W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 929Lm  
Cri 90  
IP 54  
Dimensions L: 11cm W: 10cm H: 6.5cm  
Material Aluminium - Tempered Glass  
Special Feature Up - Down Lighting  
Color Graphite / **Code E317**

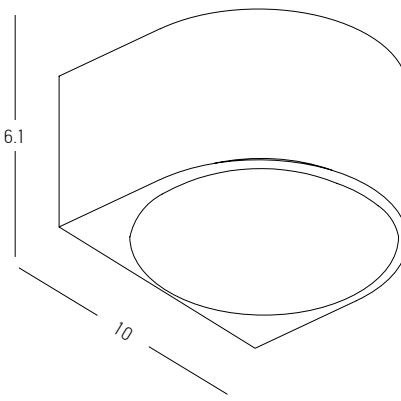


Power 5W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 544Lm  
Cri 90  
IP 54  
Dimensions L: 11cm W: 10cm H: 6.1cm  
Material Aluminium - Tempered Glass  
Color Graphite / **Code E316**



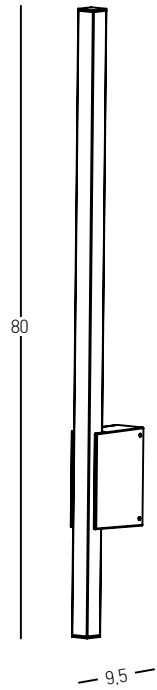


Power 12W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 1187Lm  
Cri 80  
IP 65  
Dimensions L: 9.5cm W: 4.5cm H: 80cm  
Base L: 9cm W: 4.5cm H: 12.5cm  
Material Aluminium - PC Diffuser  
Color Graphite / **Code E287**



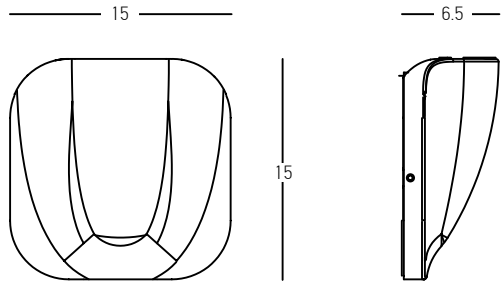


Power 9W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 572Lm  
Cri 80  
IP 54  
Dimensions L: 6.5cm W: 15cm H: 15cm  
Beam Angle 45°  
Material Aluminium - Tempered Glass  
Color Graphite / **Code E273**

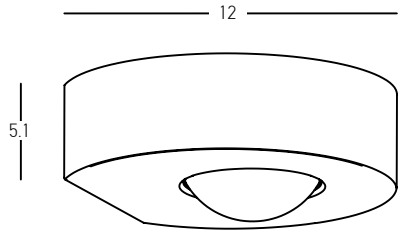


Power 9W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 752Lm  
Cri 80  
IP 54  
Dimensions L: 12cm W: 13cm H: 5.1cm  
Beam Angle 120°  
Material Aluminium - PC Diffuser  
Color Graphite / **Code E278**







Power 2x 3W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 480Lm  
Cri 80  
IP 65  
Dimensions L: 3.1cm W: 11cm H: 9cm  
Material Aluminium - Tempered Glass  
Special Feature Up - Down Lighting  
Color Graphite / **Code E238**




Power 2x 6W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 960Lm  
Cri 80  
IP 65  
Dimensions L: 3.1cm W: 17.5cm H: 9cm  
Material Aluminium - Tempered Glass  
Special Feature Up - Down Lighting  
Color Graphite / **Code E239**

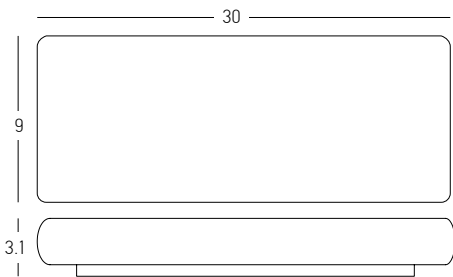


Power 2x 10W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 1600Lm  
Cri 80  
IP 65  
Dimensions L: 3.1cm W: 30cm H: 9cm  
Material Aluminium - Tempered Glass  
Special Feature Up - Down Lighting  
Color Graphite / **Code E240**



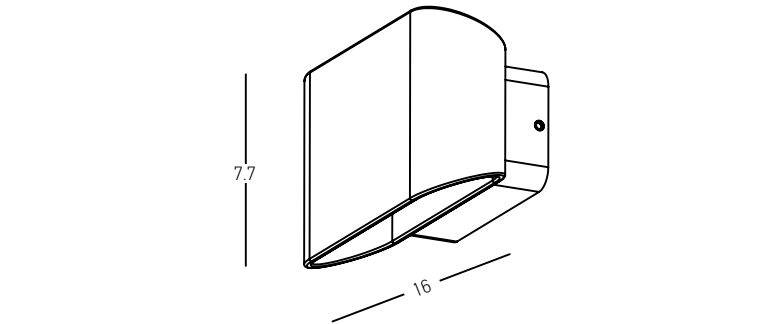


Power 11W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 900Lm  
Cri 80  
IP 54  
Dimensions L: 10cm W: 16cm H: 7.7cm  
Material Aluminium - PC Diffuser  
Special Feature Up - Down Lighting  
Color Graphite / **Code E274**

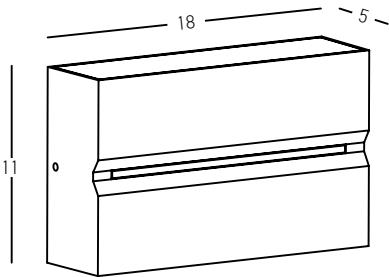




Power 15W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 796Lm  
Cri 80  
IP 54  
Dimensions L: 5cm W: 18cm H: 11cm  
Beam Angle 30°  
Material Aluminium - Tempered Glass - PC Diffuser  
Special Feature Up - Down Lighting  
12x SMD LED

Color Graphite / **Code E272**






Power 8W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 336Lm  
Cri 80  
IP 65  
Dimensions L: 6cm W: 11cm H: 11cm  
Material Aluminium - Tempered Glass  
Color Graphite / **Code E197**

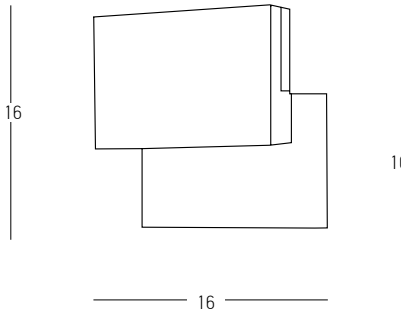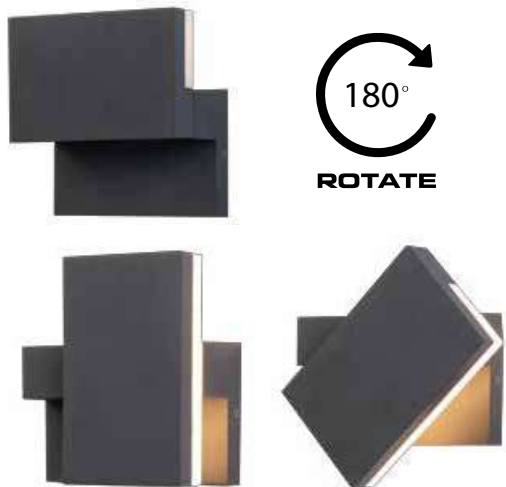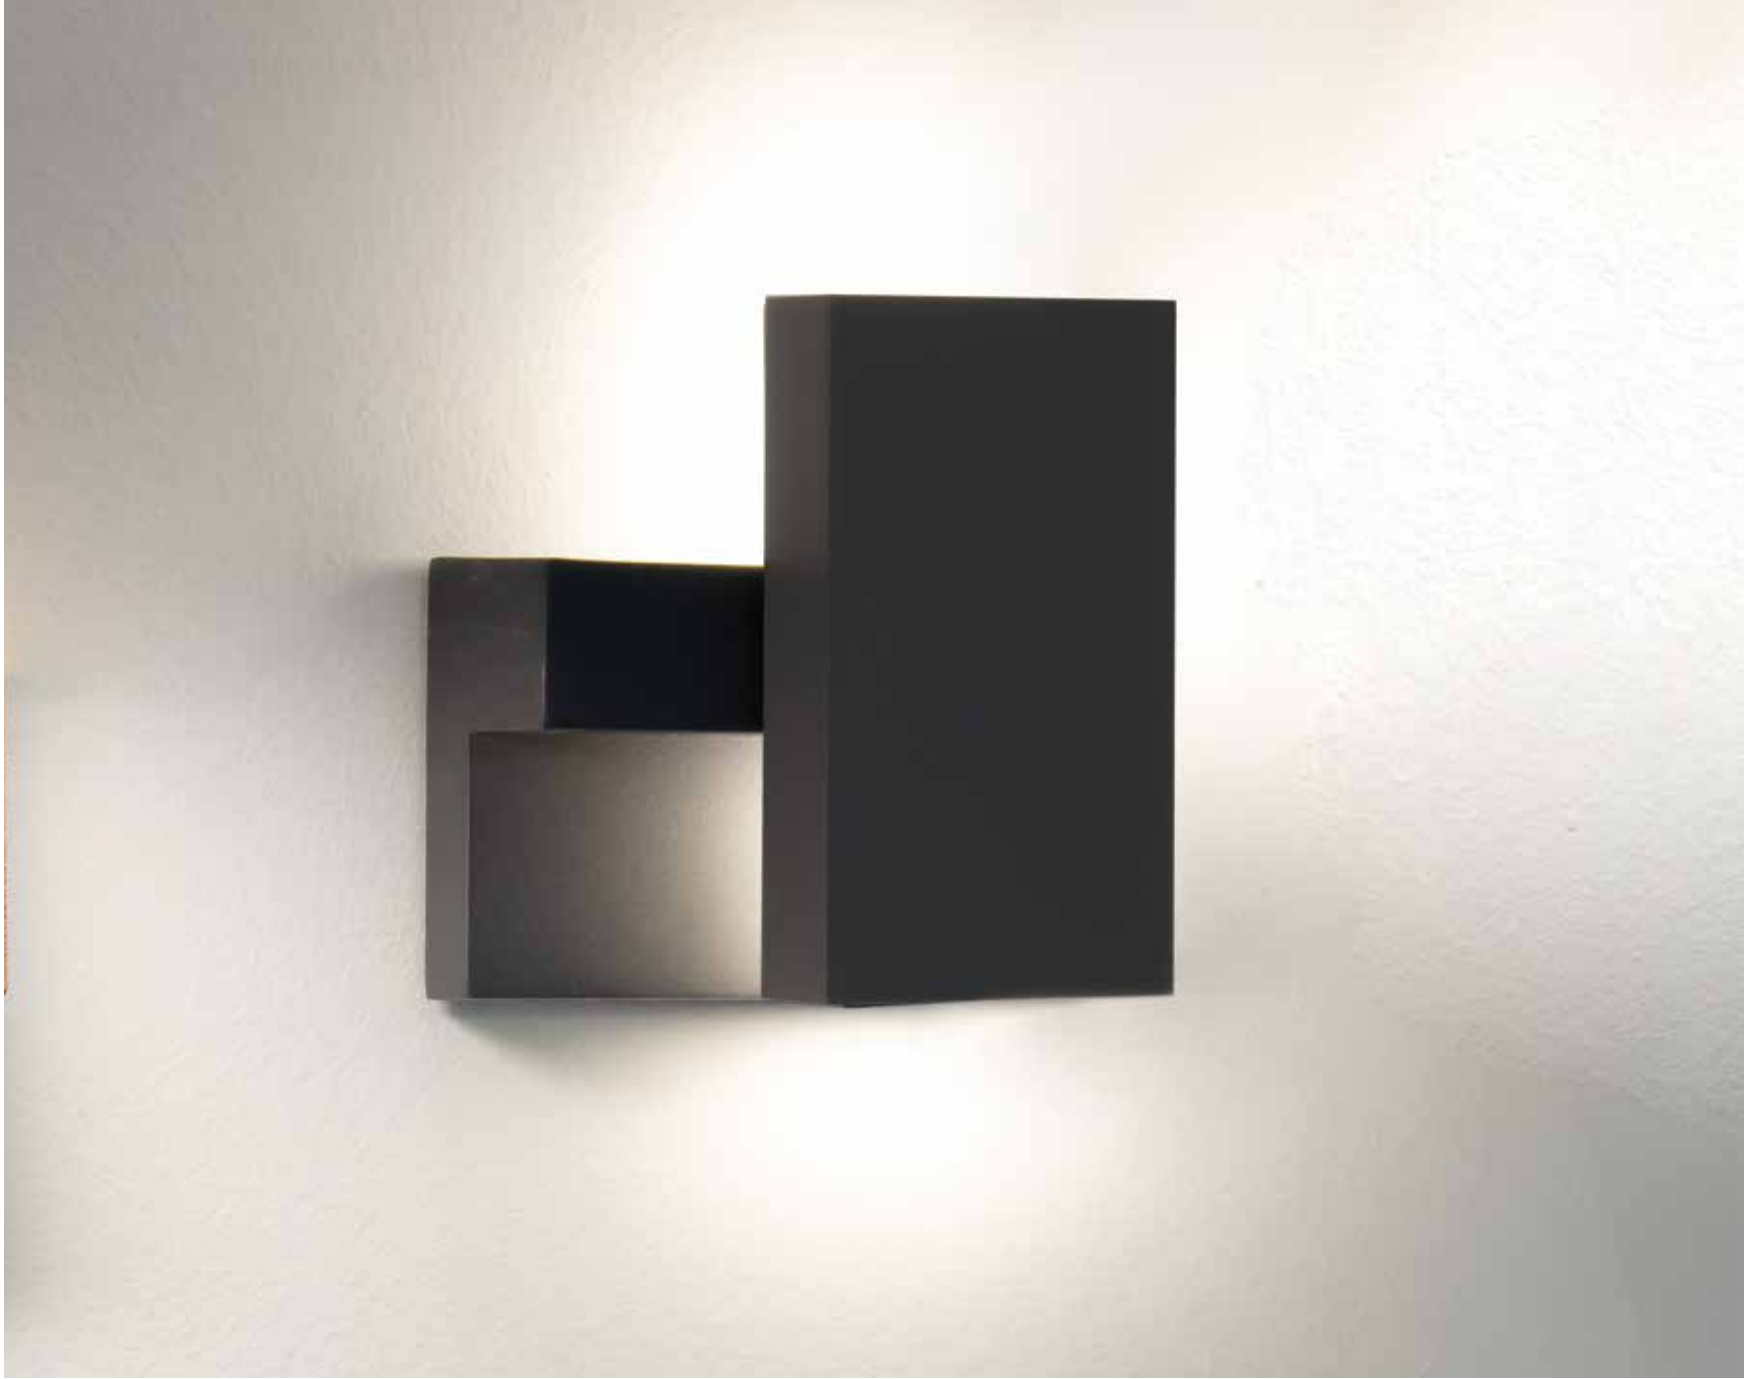


Power 10W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 810Lm  
Cri 80  
IP 65  
Dimensions L: 7.8cm W: 16cm H: 10-16cm  
Material Aluminium - PC Diffuser  
Special Feature Movable  
Color Graphite / **Code E199**



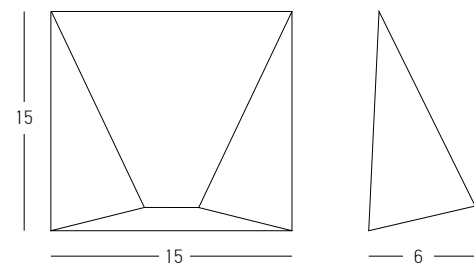


Power 7W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 480Lm  
Cri 80  
IP 54  
Dimensions L: 6cm W: 15cm H: 15cm  
Material Aluminium - Glass  
Color Graphite / **Code E243**

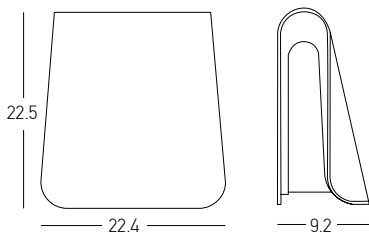


Power 6W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 480Lm  
Cri 80  
IP 54  
Dimensions L: 9.2cm W: 22.4cm H: 22.5cm  
Material Aluminium - PC Diffuser  
Color Graphite / **Code E245**



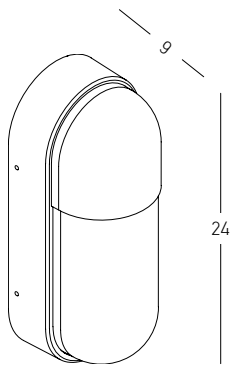


Power 10W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 498Lm  
Cri 80  
IP 54  
Dimensions L: 9cm W: 9.5cm H: 24cm  
Material Aluminium - PC Diffuser  
Color Black / **Code E318**





Power 2x 3W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 540Lm  
Cri 80  
IP 54  
Dimensions L: 11cm W: 13cm H: 14.8cm  
Material Aluminium - PC Diffuser  
Special Feature Up - Down Lighting  
Color Graphite / **Code E114**






Power 10W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 810Lm  
Cri 80  
IP 65  
Dimensions L: 7.2cm W: 16cm H: 15.5cm  
Material Aluminium - PC Diffuser  
Color Graphite / **Code E195**


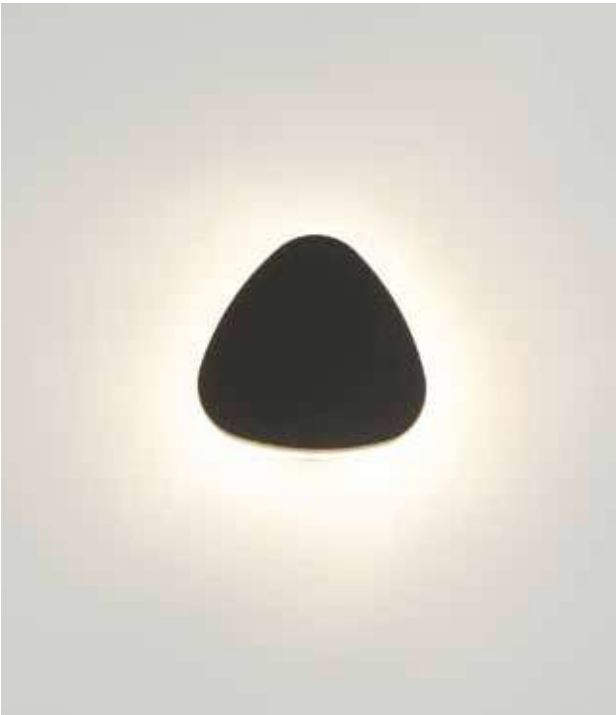


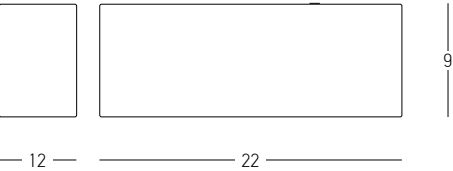

Bulb 1x E27  
Power 18W MAX  
Input 220-240V, 50/60Hz  
IP 44  
Dimensions L: 12cm W: 22cm H: 9cm  
Material Alumunium - Tempered Glass  
Special Feature Up - Down Lighting  
Color Graphite / **Code E146**

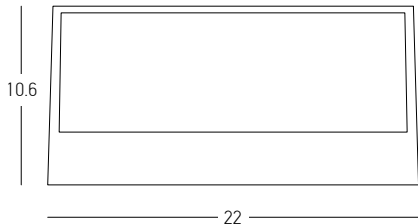



Power 2x 13.5W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 1359Lm  
Cri 80  
IP 65  
Dimensions L: 10.6cm W: 22cm H: 9cm  
Material Aluminium - Tempered Glass  
Special Feature Up - Down Lighting  
Color Dark Grey / **Code E261**  
Color Dark Brown / **Code E262**

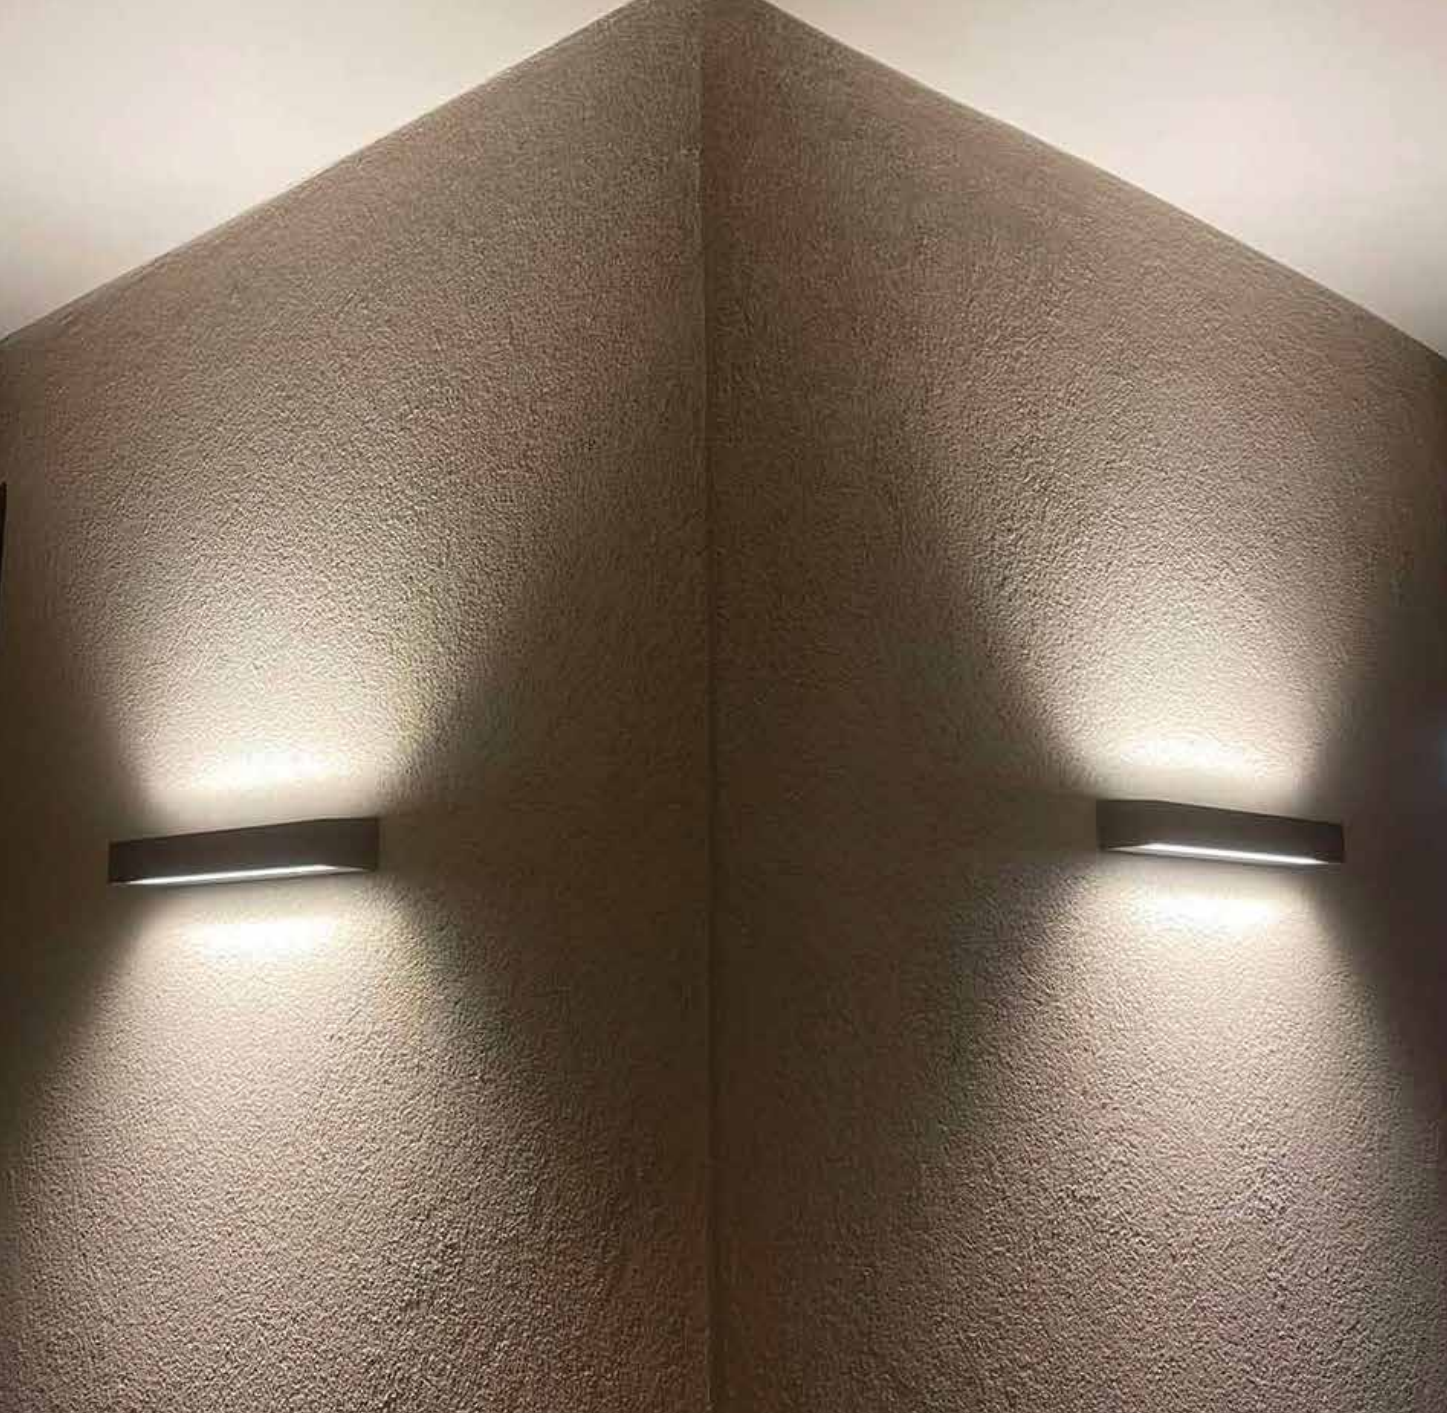


Power 30W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 2263Lm  
Cri 80  
IP 65  
Dimensions L: 7.5cm W: 50cm H: 6.5cm  
Material Aluminium - Tempered Glass  
Special Feature Up - Down Lighting  
Color Graphite / **Code E227**



OUTDOOR LIGHTING | WALL




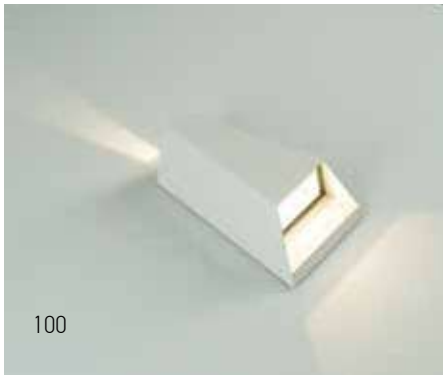



Power 2x 3W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 480Lm  
Cri 80  
IP 54  
Dimensions L: 6.5cm W: 11cm H: 17.5cm  
Material Aluminium - Tempered Glass  
Special Feature Up - Down Lighting  
Color Graphite / **Code E135**  
Color Sandy White / **Code E156**




Power 2x 3W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 480Lm  
Cri 80  
IP 54  
Dimensions L: 8.2cm W: 8cm H: 8cm  
Material Aluminium - Tempered Glass  
Special Feature Movable  
Up - Down Lighting

Color Graphite / **Code E109**  
Color Sandy White / **Code E159**

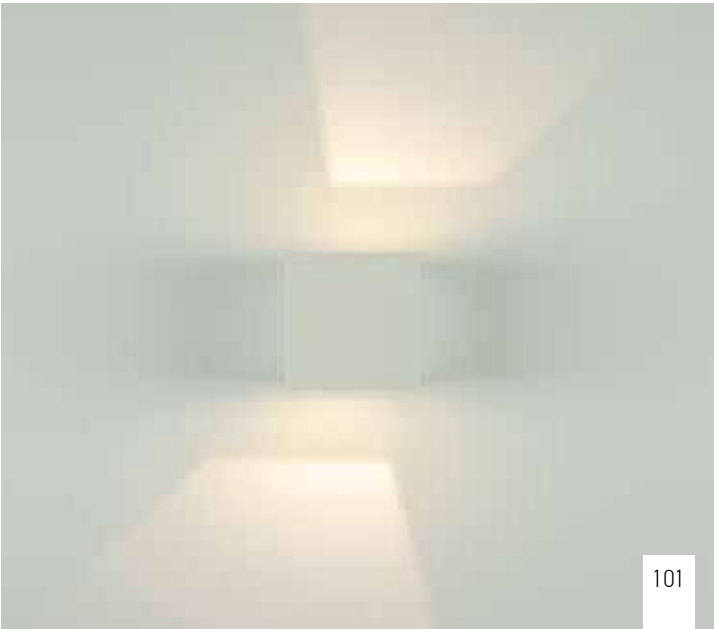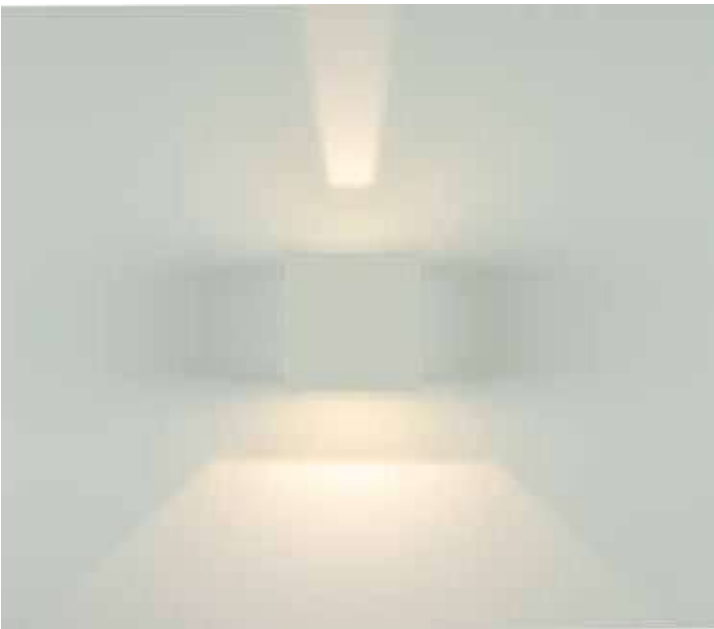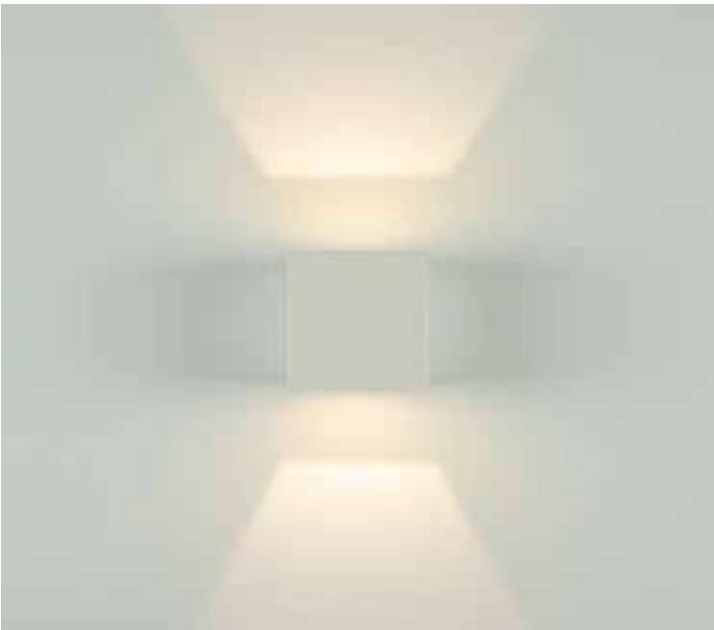


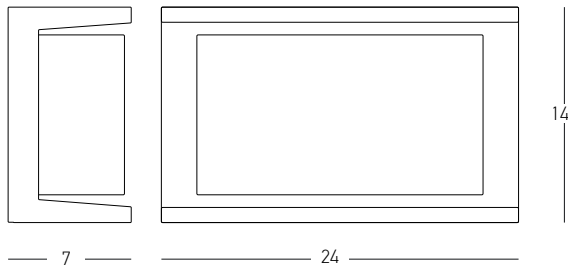

Bulb 1x E27  
Power 18W MAX  
Input 220-240V, 50/60Hz  
IP 54  
Dimensions L: 7cm W: 24cm H: 14cm  
Material Alumunium - PC Diffuser  
Color Graphite / **Code E149**

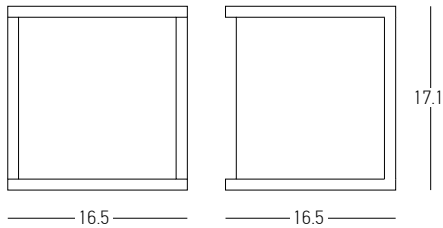


Bulb 1x E27  
Power 18W MAX  
Input 220-240V, 50/60Hz  
IP 54  
Dimensions L: 16.5cm W: 16.5cm H: 17.1cm  
Material Alumunium - PC Diffuser  
Color Graphite / **Code E127**

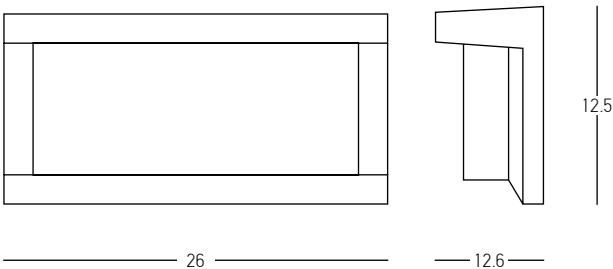


Bulb 1x E27  
Power 18W MAX  
Input 220-240V, 50/60Hz  
IP 54  
Dimensions L: 12.6cm W: 26cm H: 12.5cm  
Material Alumunium - PC Diffuser  
Color Graphite / **Code E128**







Bulb 2x GU10  
Power 15W MAX  
Input 220-240V, 50/60Hz  
IP 54  
Dimensions L: 9.2cm W: 6.5cm H: 15cm  
Material Aluminium - Tempered Glass  
Special Feature Up - Down Lighting  
Color Graphite / **Code E124**



Bulb 1x GU10  
Power 15W MAX  
Input 220-240V, 50/60Hz  
IP 54  
Dimensions L: 9.2cm W: 6.5cm H: 9cm  
Material Aluminium - Tempered Glass  
Color Graphite / **Code E123**




Bulb 2x GU10  
Power 15W MAX  
Input 220-240V, 50/60Hz  
IP 54  
Dimensions L: 9.2cm W: 6.5cm H: 15cm  
Material Aluminium - Tempered Glass  
Special Feature Up - Down Lighting  
Color Graphite / **Code E122**




Bulb 1x GU10  
Power 15W MAX  
Input 220-240V, 50/60Hz  
IP 54  
Dimensions L: 9.2cm W: 6.5cm H: 9cm  
Material Aluminium - Tempered Glass  
Color Graphite / **Code E121**







Bulb 2x GU10 LED  
Power 7W MAX  
Input 220-240V, 50/60Hz  
IP 54  
Dimensions L: 9.5cm W: 6.8cm H: 15cm  
Material ABS - Acrylic  
Special Feature Up - Down Lighting  
Color Sandy Black / **Code E307**



Bulb 1x GU10 LED  
Power 7W MAX  
Input 220-240V, 50/60Hz  
IP 54  
Dimensions L: 9.5cm W: 6.8cm H: 7.5cm  
Material ABS - Acrylic  
Color Sandy Black / **Code E306**




Bulb 2x GU10  
Power 15W MAX  
Input 220-240V, 50/60Hz  
IP 54  
Dimensions L: 9.2cm W: 6.5cm H: 15cm  
Material Aluminium - Tempered Glass  
Special Feature Up - Down Lighting  
Color Sandy White / **Code E151**




Bulb 1x GU10  
Power 15W MAX  
Input 220-240V, 50/60Hz  
IP 54  
Dimensions L: 9.2cm W: 6.5cm H: 9cm  
Material Aluminium - Tempered Glass  
Color Sandy White / **Code E150**






Bulb 1x GU10  
Power 9W MAX  
Input 220-240V, 50/60Hz  
IP 54  
Dimensions Ø 7.6cm L: 9.9cm H: 14.8cm  
Material ABS - PC Diffuser  
Color White / **Code E185**




Bulb 2x GU10  
Power 9W MAX  
Input 220-240V, 50/60Hz  
IP 54  
Dimensions Ø: 7.6cm L: 9.9cm H: 18.6cm  
Material ABS - PC Diffuser  
Special Feature Up - Down Lighting  
Color White / **Code E186**






Power 8W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 720Lm  
Cri 80  
IP 65  
Dimensions Ø: 16.5cm L: 5.8cm  
Material ABS - PC Diffuser  
Color Sandy Black / **Code E305**  
Sandy White / **Code E304**







Power 11W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 653Lm  
Cri 80  
IP 54  
Dimensions L: 7.5cm W: 22cm H: 3.2cm  
Material Aluminium - Tempered Glass  
Color Sandy White / **Code E168**




Power 2x 2W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 320Lm  
Cri 80  
IP 65  
Dimensions L: 3cm W: 8.3cm H: 12.3cm  
Material ABS - PC Diffuser  
Special Feature Up - Down Lighting  
Color White / **Code E216**

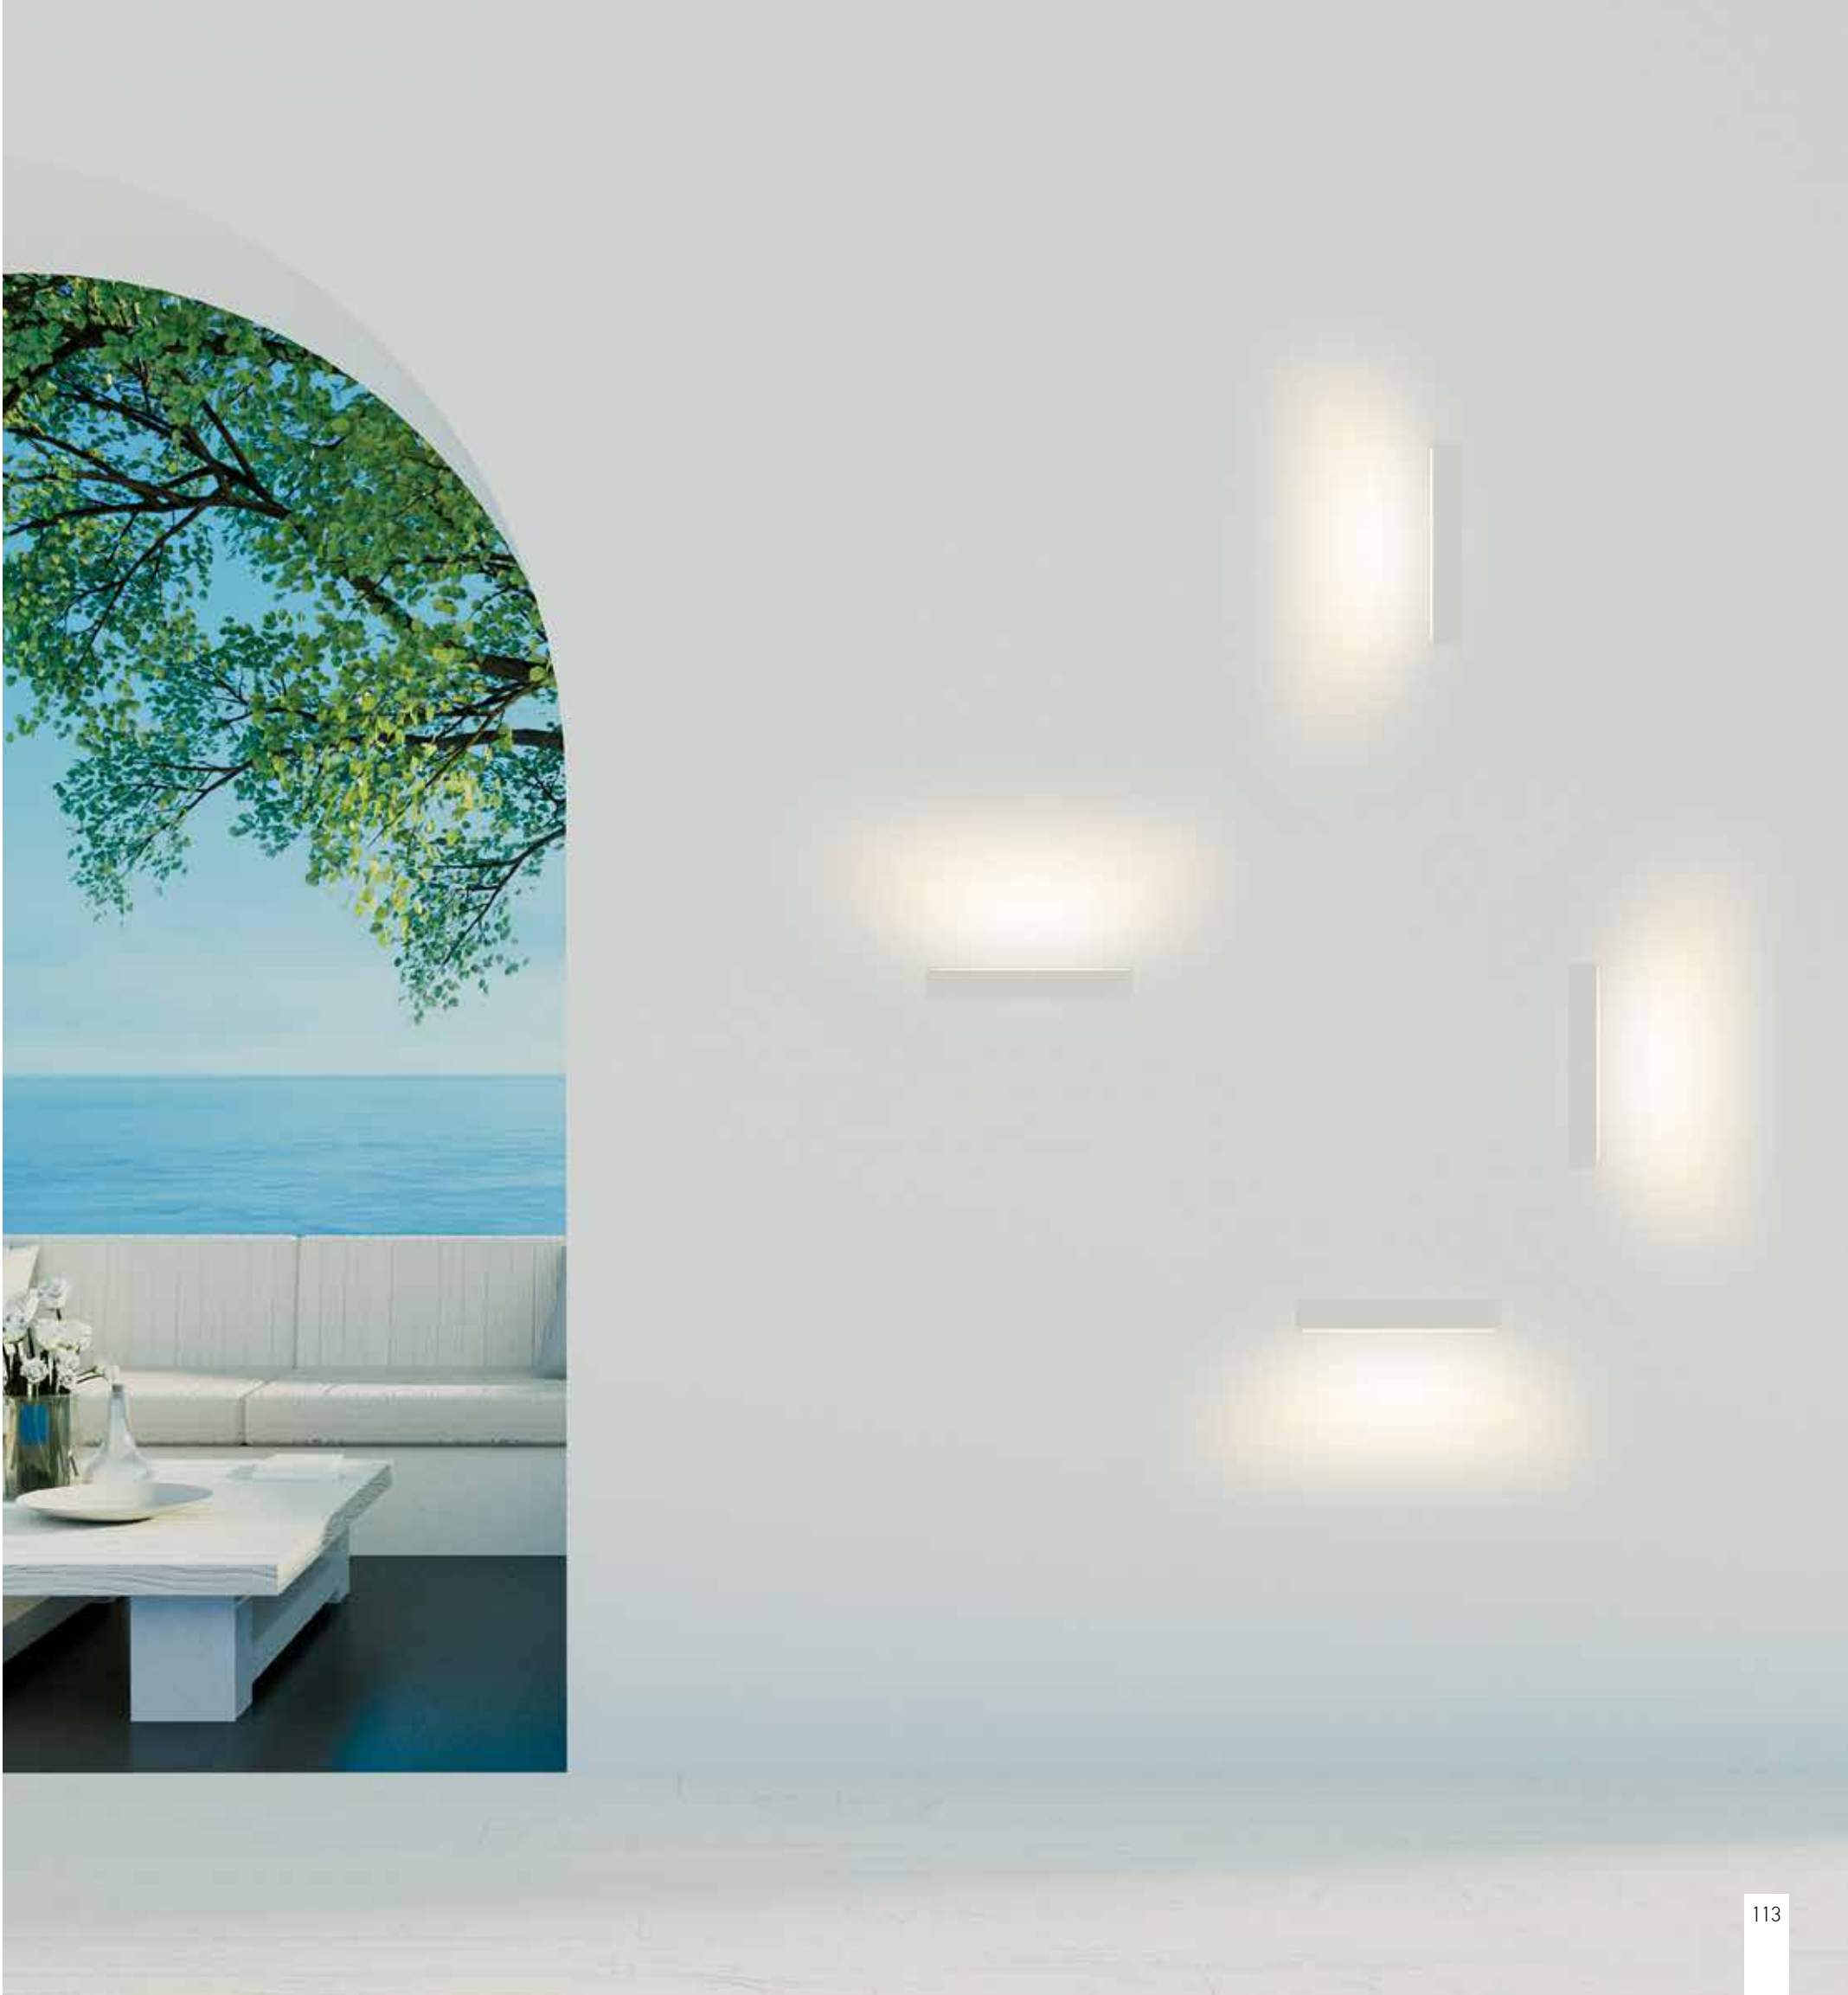

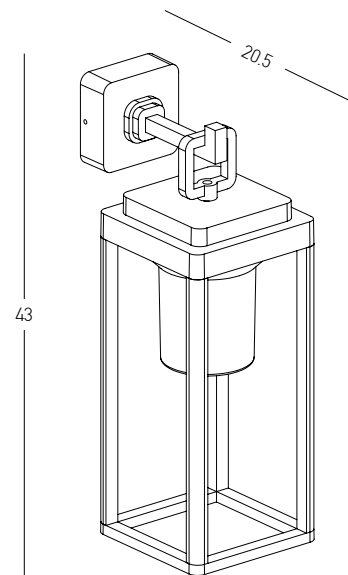


Bulb 1x E27  
Power 15W MAX  
Input 220-240V, 50/60Hz  
IP 65  
Dimensions L: 20.5cm W: 14.5cm H: 43cm  
Base L: 3.3cm W: 9cm H: 9cm  
Material Aluminium - Clear Diffuser  
Color Dark Brown / **Code E343**



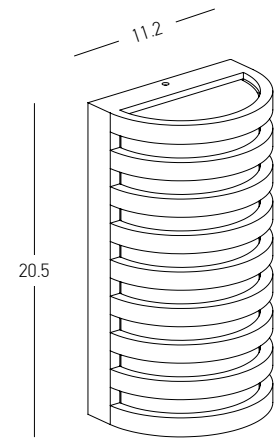


Power 10W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 929Lm  
Cri 80  
IP 65  
Dimensions L: 8cm W: 11.2cm H: 20.5cm  
Material Aluminium - PC Diffuser  
Color Dark Brown / **Code E341**

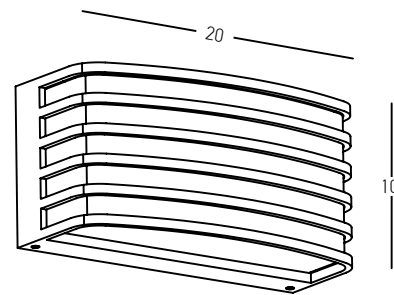



Bulb 1x E27  
Power 20W MAX  
Input 220-240V, 50/60Hz  
IP 54  
Dimensions L: 9cm W: 20cm H: 10cm  
Material Aluminium - PC Diffuser  
Color Dark Brown / **Code E275**



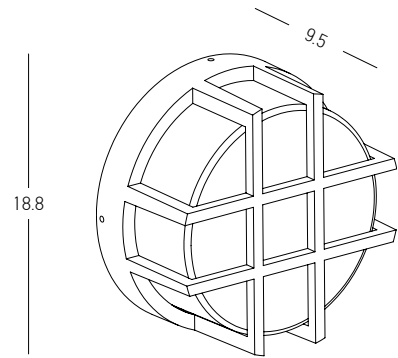


Power 10W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 880Lm  
Cri 80  
IP 65  
Dimensions Ø: 18.8cm L: 9.5cm  
Material Aluminium - PC Diffuser  
Color Dark Brown / **Code E342**

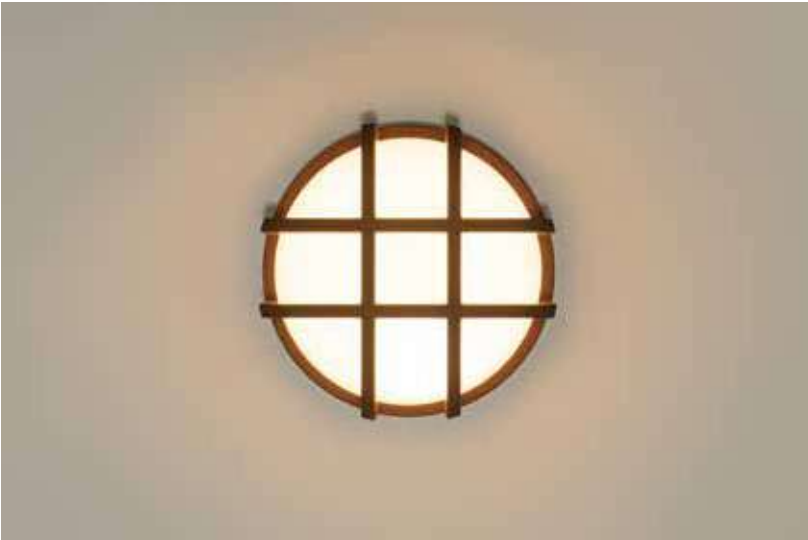

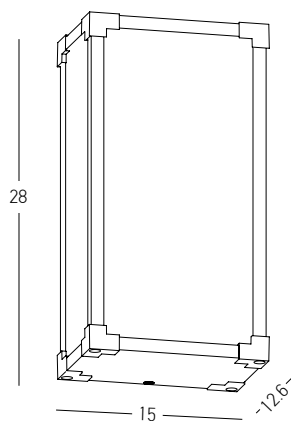


Power 12W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 816Lm  
Cri 80  
IP 65  
Dimensions L: 12.6cm W: 15cm H: 28cm  
Material Aluminium - Opal PC Diffuser  
Color Dark Brown / **Code E263**






Power 10W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 810Lm  
Cri 80  
IP 65  
Dimensions L: 9cm W: 9.5cm H: 26.5cm  
Material Aluminium - PC Diffuser  
Color Sandy Black / **Code E202**




Bulb 1x E27  
Power 15W MAX  
Input 220-240V, 50/60Hz  
IP 65  
Dimensions L: 9cm W: 9.5cm H: 26.5cm  
Material Aluminium - Clear Diffuser  
Color Sandy Black / **Code E201**

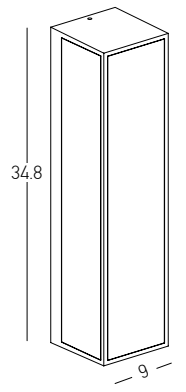


Bulb 2x E27  
Power 15W MAX  
Input 220-240V, 50/60Hz  
IP 54  
Dimensions L: 9cm W: 8.6cm H: 34.8cm  
Material Aluminium - Tempered Glass  
Color Graphite / **Code E296**




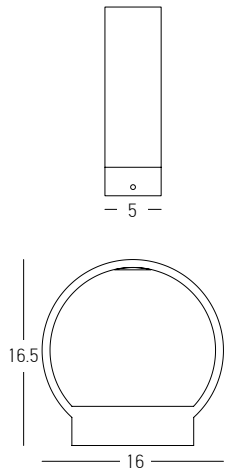


Power 7W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 530Lm  
Cri 80  
IP 65  
Dimensions L: 16.5cm W: 16cm H: 5cm  
Material Aluminium - Tempered Glass  
Special Feature Up - Down Lighting  
Color Dark Brown / **Code E268**

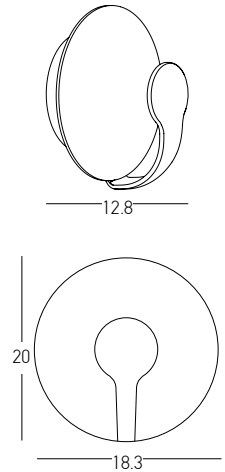


Power 12W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 880Lm  
Cri 80  
IP 65  
Dimensions L: 12.8cm W: 18.3cm H: 20cm  
Material Aluminium  
Color Dark Brown - Sandy White / **Code E271**

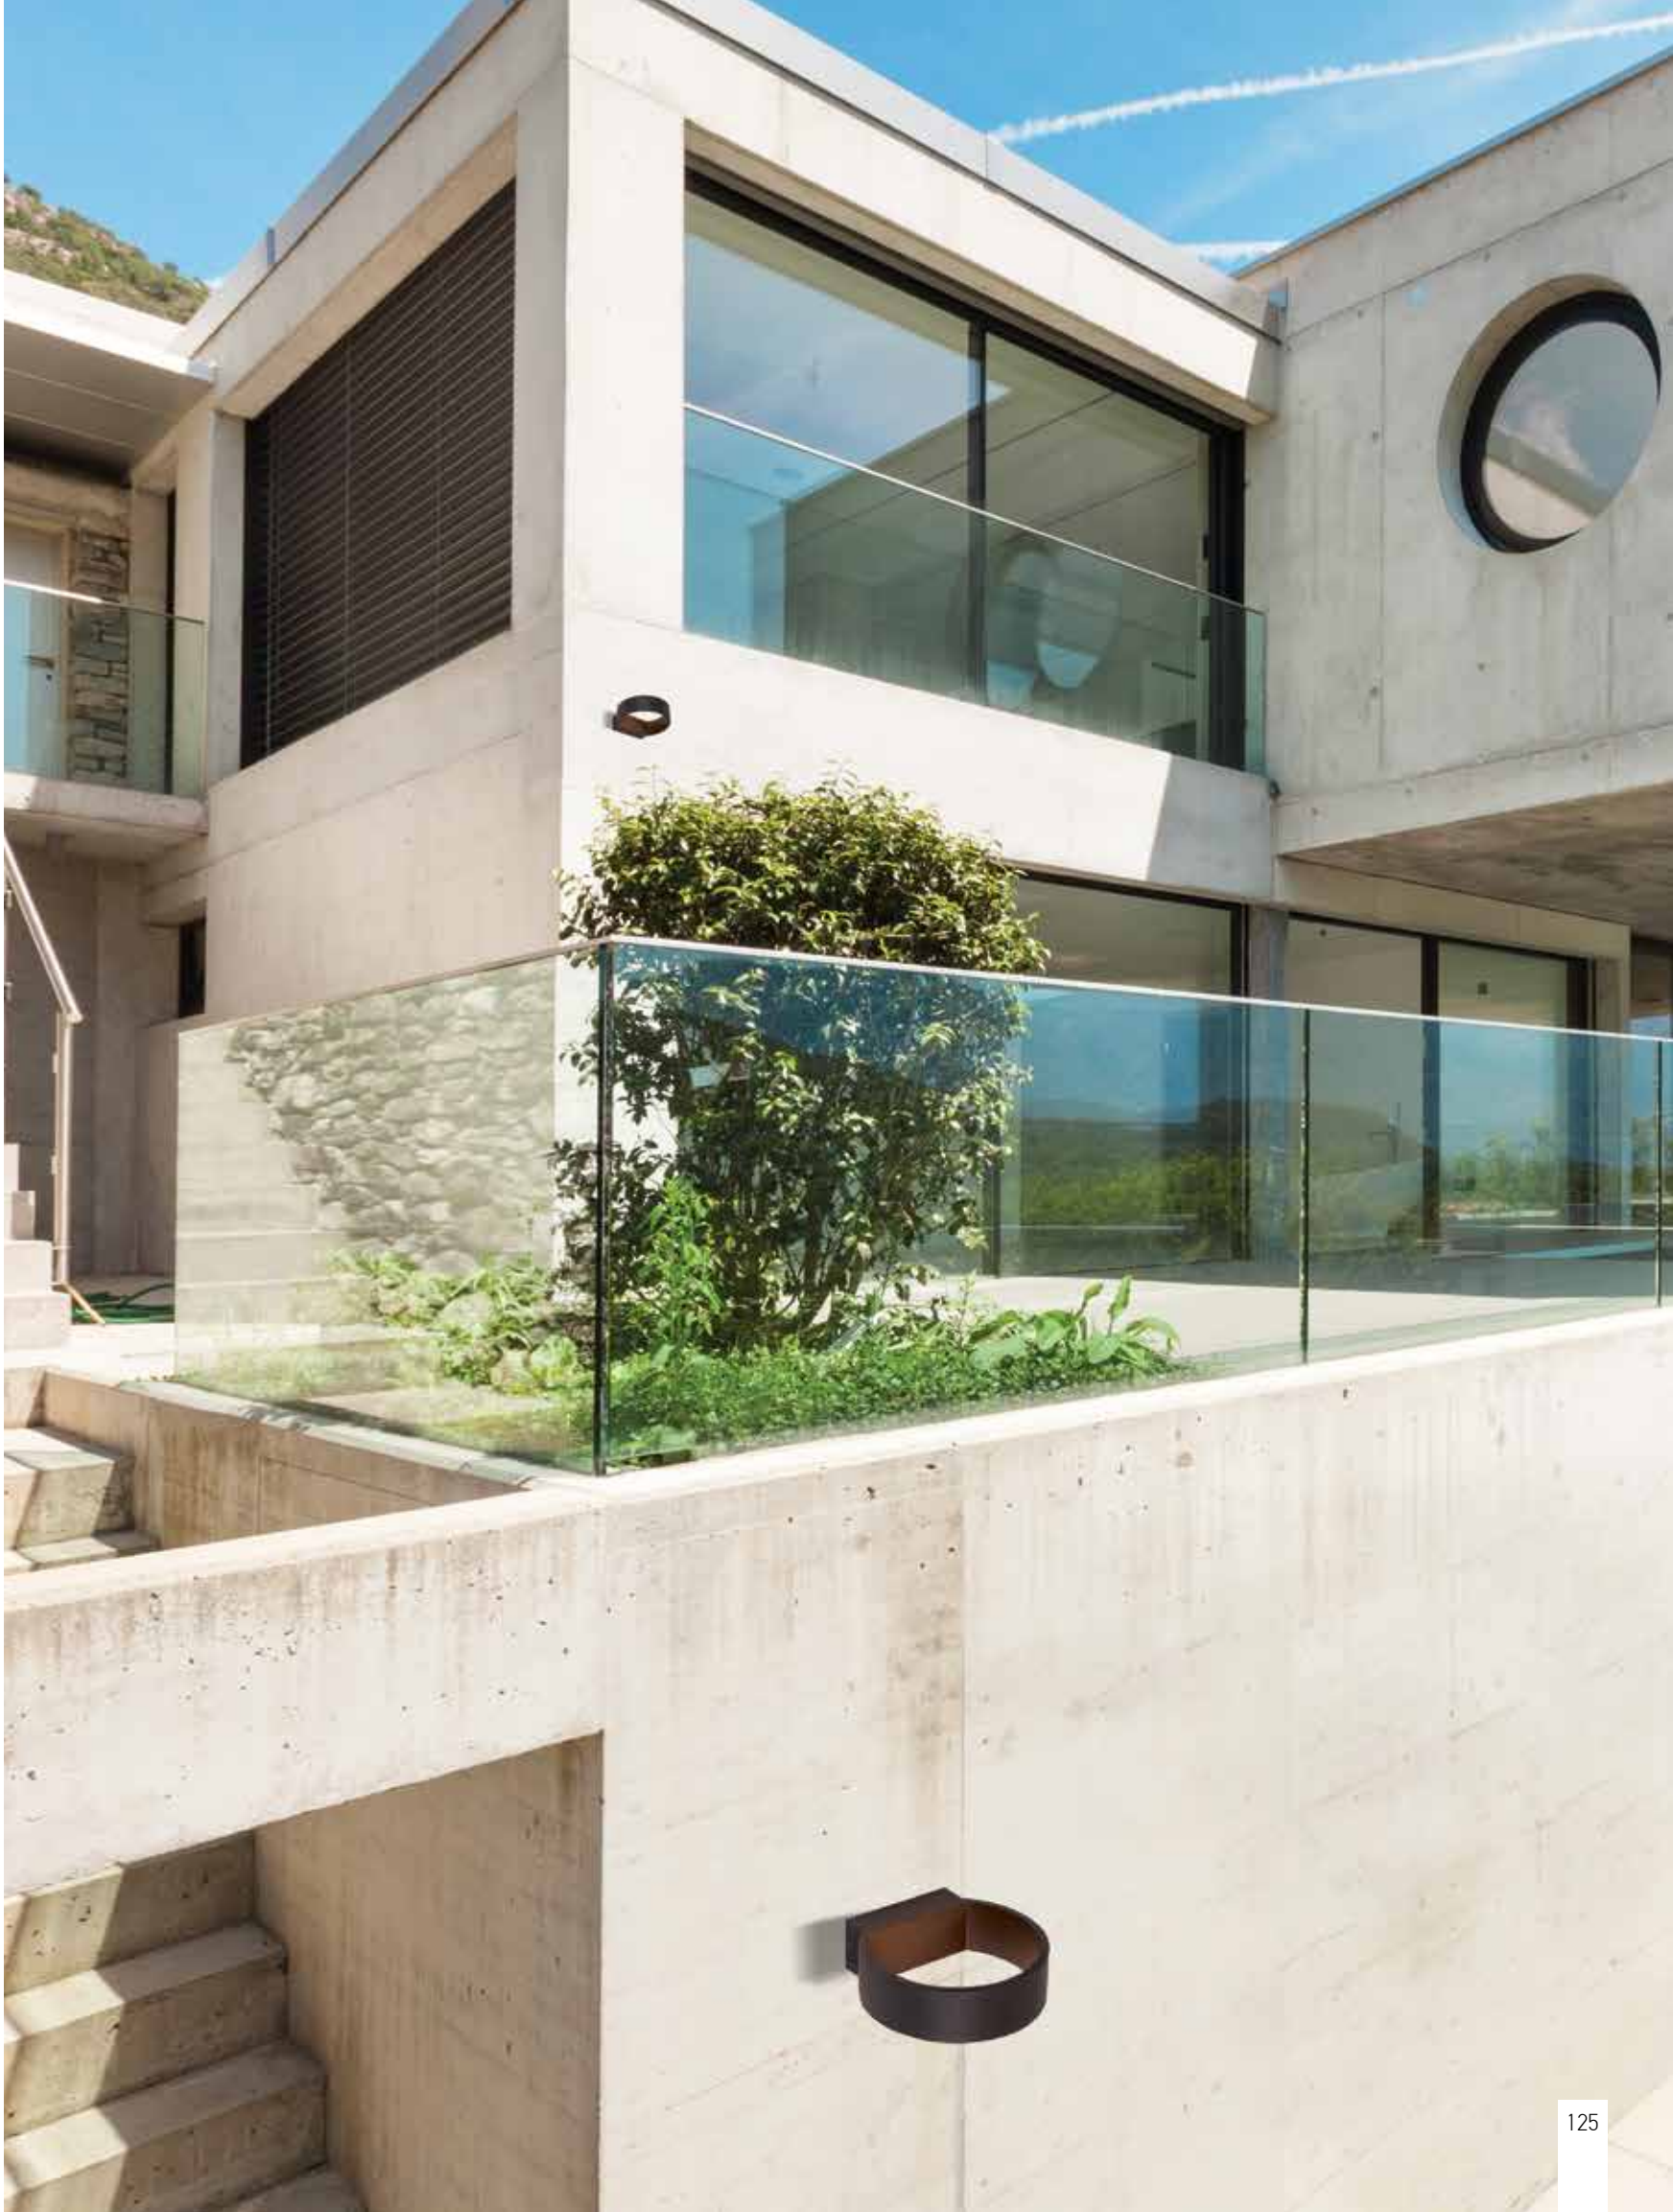



- Power 11W
- Input 220-240V, 50/60Hz
- Color Temperature 3000K
- Lumen 640Lm
- Cri 80
- IP 65
- Dimensions L: 9.6cm W: 30cm H: 12cm
- Material Aluminium - Opal PC Diffuser
- Special Feature Up - Down Lighting
- Color Dark Grey / **Code E265**
- Color Dark Brown / **Code E266**




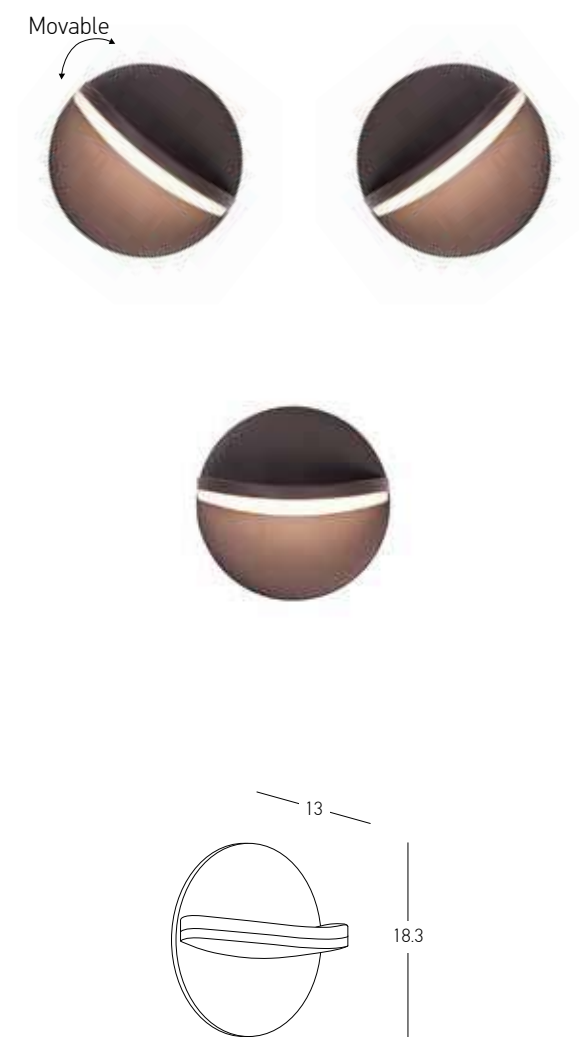

Power 16W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 1106Lm  
Cri 80  
IP 65  
Dimensions Ø: 18.3cm L: 13cm  
Material Aluminium - Opal PC Diffuser  
Special Feature Movable Light  
Color Dark Brown / **Code E267**




SPIKES | p.130-163

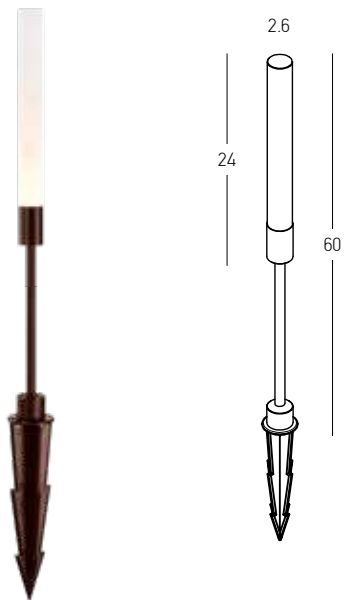

Power 3W  
Input 24V  
Color Temperature 3000K  
Lumen 180Lm  
Cri 80  
IP 65  
Dimensions Ø: 2.6cm H: 60cm  
Base Ø: 10cm H: 2cm  
Material Aluminium - Acrylic  
Special Feature 30cm Cable Available  
Spike & Base Included  
Recommended Driver D-20-24 (Not Included)  
In Parallel Connection 1-6 pcs

Color

Dark Brown / **Code E372**

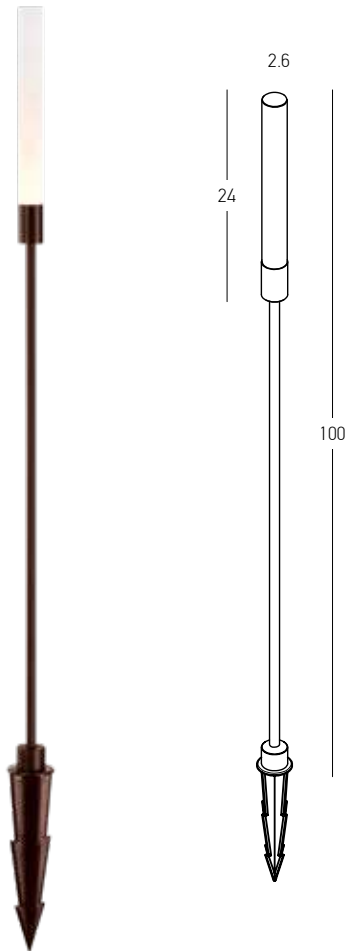

Power 3W  
Input 24V  
Color Temperature 3000K  
Lumen 180Lm  
Cri 80  
IP 65  
Dimensions Ø: 2.6cm H: 100cm  
Base Ø: 10cm H: 2cm  
Material Aluminium - Acrylic  
Special Feature 30cm Cable Available  
Spike & Base Included  
Recommended Driver D-20-24 (Not Included)  
In Parallel Connection 1-6 pcs

Color

Dark Brown / **Code E373**



**Driver**

**D-20-24**

Power 20W  
Input 220-240V, 50/60Hz  
Output 24V  
Dimensions L: 12cm W: 4cm H: 2.5cm  
IP 20




**Waterproof Connection Box 1in / 1out , 16A , 450V**

IP 67

Color

Black / **Code Z0800-BA**



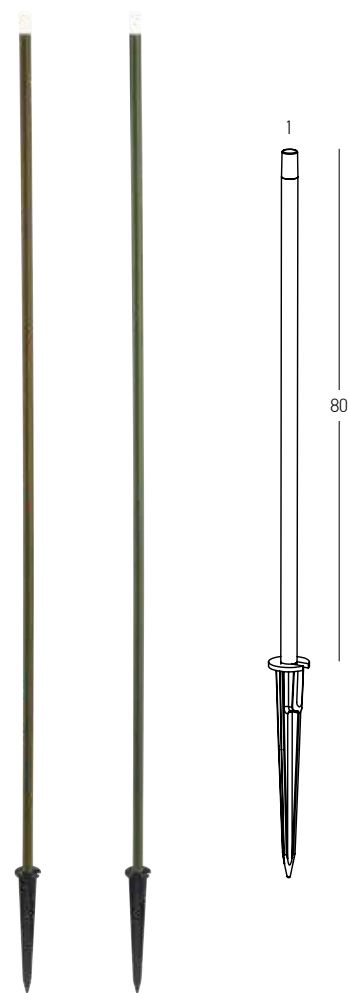

Power 1W  
Input 24V  
Color Temperature 2700K  
Lumen 58Lm  
Cri 80  
IP 65  
Dimensions Ø: 1cm H: 80cm  
Material Stainless Steel - PC Diffuser  
Special Feature 100cm Cable Available  
Spike Included  
Recommended Driver D-20-24 (Not Included)  
In Parallel Connection 1-19 pcs  
Color Dark Brown / **Code E330**  
Color Dark Green / **Code E331**



Power 1W  
Input 24V  
Color Temperature 2700K  
Lumen 58Lm  
Cri 80  
IP 65  
Dimensions Ø: 1cm H: 30cm  
Material Stainless Steel - PC Diffuser  
Special Feature 100cm Cable Available  
Spike Included  
Recommended Driver D-20-24 (Not Included)  
In Parallel Connection 1-19 pcs  
Color Dark Brown / **Code E328**  
Color Dark Green / **Code E329**




**Driver**  
Power 20W  
Input 220-240V, 50/60Hz  
Output 24V  
Dimensions L: 12cm W: 4cm H: 2.5cm  
IP 20




**Waterproof Connection Box 1in / 1out , 16A , 450V**  
IP 67  
Color Black / **Code Z0800-BA**



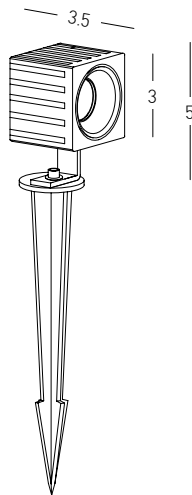

Power 3W  
Input 24V  
Color Temperature 3000K  
Lumen 228Lm  
Cri 90  
IP 65  
Dimensions L: 3cm W: 3.5cm H: 5cm  
Beam Angle 36°  
Material Aluminium - Tempered Glass  
Special Feature 30cm Cable Available  
Movable Spot  
Spike Included  
Recommended Driver D-20-24 (Not Included)  
In Parallel Connection 1-6 pcs  
Color Graphite / **Code E350**

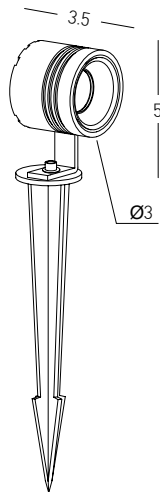

Power 3W  
Input 24V  
Color Temperature 3000K  
Lumen 228Lm  
Cri 90  
IP 65  
Dimensions Ø: 3cm L: 3.5cm H: 5cm  
Beam Angle 36°  
Material Aluminium - Tempered Glass  
Special Feature 30cm Cable Available  
Movable Spot  
Spike Included  
Recommended Driver D-20-24 (Not Included)  
In Parallel Connection 1-6 pcs  
Color Graphite / **Code E349**



**Driver**  
Power 20W  
Input 220-240V, 50/60Hz  
Output 24V  
Dimensions L: 12cm W: 4cm H: 2.5cm  
IP 20




**Waterproof Connection Box 1in / 1out , 16A , 450V**  
IP 67  
Color Black / **Code Z0800-BA**





Power 2.3W  
Input 3.2V , 700mA  
Color Temperature 2700K  
Lumen 130Lm  
Cri 80  
IP 54  
Dimensions Ø: 2.2cm L: 7cm H: 3.2cm  
Beam Angle 40°  
Material Brush  
Special Feature 60cm Cable Available  
Movable Spot  
Spike Included  
Optional In Special RAL  
V350-1050 (Not Included)  
In Series Connection 1-9 pcs  
Recommended Driver  
Color Natural Brush / **Code E403**

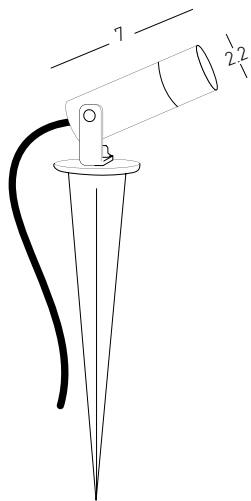

Power 2.3W  
Input 3.2V , 700mA  
Color Temperature 3000K  
Lumen 130Lm  
Cri 80  
IP 54  
Dimensions Ø: 2.2cm L: 7cm H: 3.2cm  
Beam Angle 40°  
Material Brush  
Special Feature 60cm Cable Available  
Movable Spot  
Spike Included  
Optional In Special RAL  
V350-1050 (Not Included)  
In Series Connection 1-9 pcs  
Recommended Driver  
Color Natural Brush / **Code E404**




**Driver**  
Power 34W  
Input 220-240V, 50/60Hz  
Output 2 - 32V  
Dimensions L: 15cm W: 4cm H: 3cm  
IP 20

**Driver**


**V350-1050**



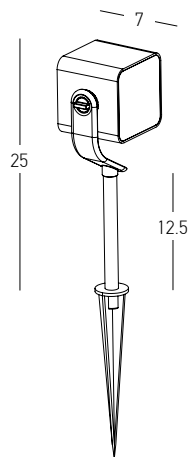

Power 12W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 740Lm  
Cri 80  
IP 65  
Dimensions L: 7cm W: 7cm H: 25cm  
Base Ø: 6cm H: 0.5cm  
Beam Angle 40°  
Material Aluminium - Tempered Glass  
Special Feature 40cm Cable Available  
Movable Spot  
Spike & Base Included  
Waterproof Connector Included


Color Graphite / **Code E286**

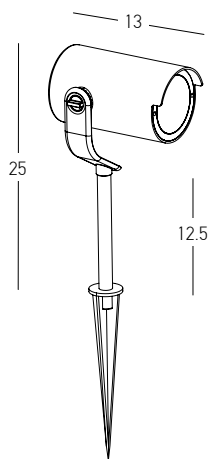


Power 12W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 740Lm  
Cri 80  
IP 65  
Dimensions Ø: 7.5cm L: 13cm H: 25cm  
Base Ø: 6cm H: 0.5cm  
Beam Angle 40°  
Material Aluminium - Tempered Glass  
Special Feature 40cm Cable Available  
Movable Spot  
Spike & Base Included  
Waterproof Connector Included


Color Graphite / **Code E285**



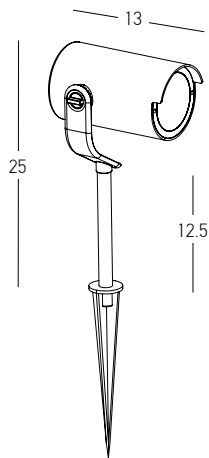


Bulb 1x GU10  
Power 20W MAX  
Input 220-240V, 50/60Hz  
IP 65  
Dimensions Ø: 7.5cm L: 13cm H: 25cm  
Base Ø: 6cm H: 0.5cm  
Material Aluminium - Tempered Glass  
Special Feature 40cm Cable Available  
Movable Spot  
Spike & Base Included  
Waterproof Connector Included  
Color Dark Brown / **Code E284**

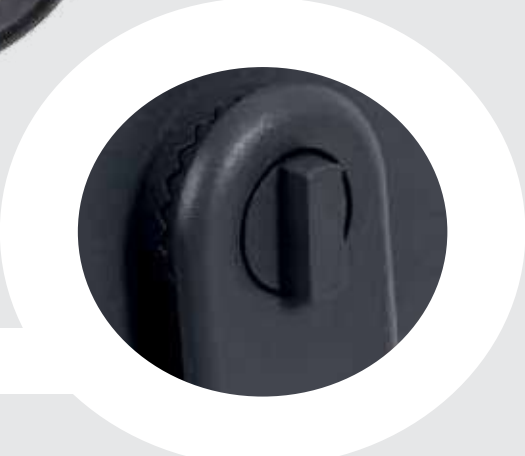

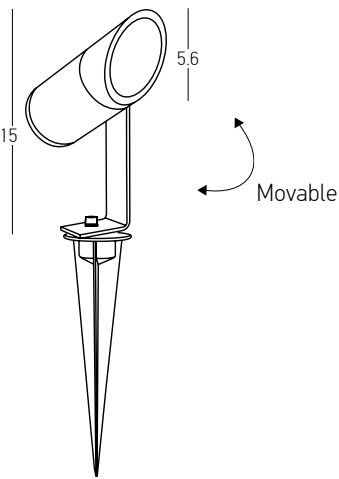

Power 7W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 516Lm  
Cri 80  
IP 65  
Dimensions Ø: 5.6cm H: 15cm  
Beam Angle 36°  
Material Aluminium - Tempered Glass  
Special Feature 20cm Cable Available  
Movable Spot  
Spike Included


Color Graphite / **Code E152**

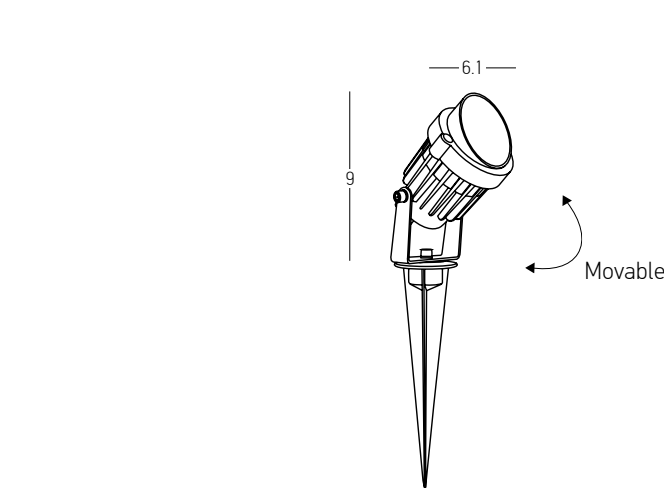


Power 5W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 380Lm  
Cri 80  
IP 65  
Dimensions Ø: 6.1cm H: 9cm  
Beam Angle 36°  
Material Aluminium - Tempered Glass  
Special Feature 20cm Cable Available  
Movable Spot  
Spike Included

Color Graphite / **Code E153**



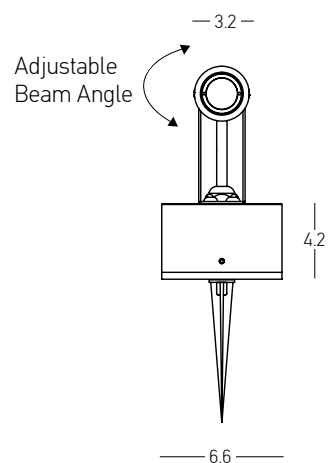

Power 2.1W  
Input 220-240V, 50/60Hz  
Color Temperature 2700K  
Lumen 168Lm  
Cri 80  
IP 54  
Dimensions L: 8cm H: 8.5cm  
Base Ø: 6.6cm H: 4.2cm  
Beam Angle 10°-60°  
Material Aluminium - Stainless Steel  
Special Feature 60cm Cable Available  
Stick Ø: 3.2cm H: 8cm  
Spike Included  
  
Color Sandy Black / **Code E177-B**





Power 2.1W  
Input 3V , 700mA  
Color Temperature 2700K  
Lumen 168Lm  
Cri 80  
IP 54  
Dimensions L: 8cm H: 8.5cm  
Beam Angle 10-60°  
Material Aluminium - Stainless Steel  
Special Feature 60cm Cable Available  
Stick Ø: 3.2cm H: 8cm  
Spike Included  
  
Recommended Driver V350-1050 (Not Included)  
In Series Connection 1-10 pcs  
  
Color Sandy Black / **Code E177-A**



**Driver**  
Power 34W  
Input 220-240V, 50/60Hz  
Output 2 - 32V  
Dimensions L: 15cm W: 4cm H: 3cm  
IP 20


**V350-1050**



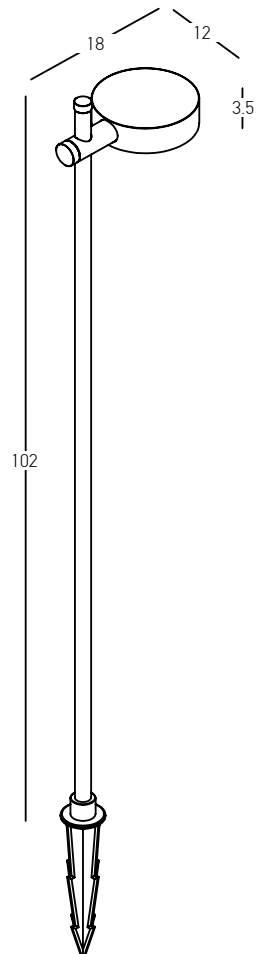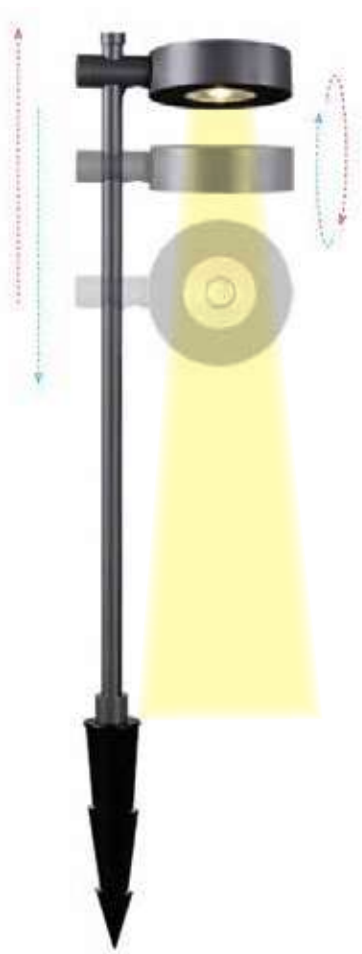

Power 6W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 522Lm  
Cri 90  
IP 65  
Dimensions L: 18cm W: 12cm H: 102cm  
Base Ø: 10.5cm H: 1cm  
Shade Dimensions Ø: 12cm H: 3.5cm  
Beam Angle 36°  
Material Aluminium - Tempered Glass  
Special Feature 40cm Cable Available  
Movable - Rotational Spot  
Spike & Base Included


Color Graphite / **Code E292**

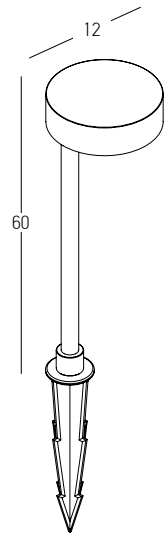


Power 6W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 629Lm  
Cri 90  
IP 65  
Dimensions Ø: 12cm H: 63.5cm  
Base Ø: 10.5cm H: 1cm  
Shade Dimensions Ø: 12cm H: 3.5cm  
Material Aluminium - Tempered Glass  
Special Feature 50cm Cable Available  
Asymmetric Beam Angle  
Spike & Base Included

Color Graphite / **Code E293**



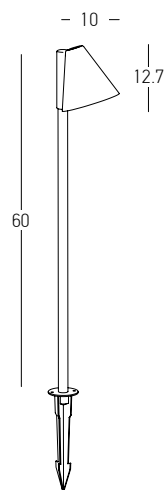

Bulb 1x GU10  
Power 20W MAX  
Input 220-240V, 50/60Hz  
IP 65  
Dimensions L: 10cm W: 10cm H: 60cm  
Material Aluminium - Tempered Glass  
Special Feature 50cm Cable Available  
Spike Included  
Recommended Base E282-SP / Not Included  
  
Color Graphite / **Code E281**

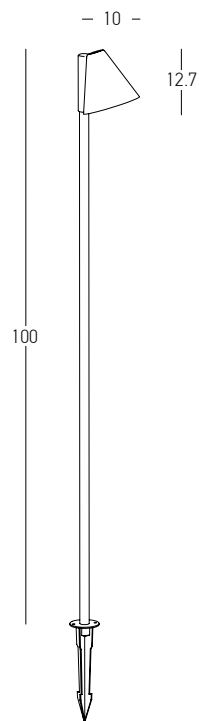


Bulb 1x GU10  
Power 20W MAX  
Input 220-240V, 50/60Hz  
IP 65  
Dimensions L: 10cm W: 10cm H: 100cm  
Material Aluminium - Tempered Glass  
Special Feature 40cm Cable Available  
Spike Included  
Recommended Base E282-SP / Not Included  
  
Color Graphite / **Code E282**




**Base for E281 - E282**  
Dimmensions Ø: 9.5cm H: 2cm  
Material Aluminium  
  
Color Graphite / **Code E282-SP**



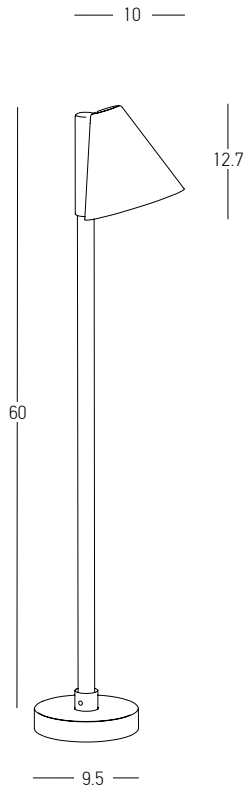


Power 6W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 522Lm  
Cri 80  
IP 65  
Dimensions L: 10cm W: 10cm H: 60cm  
Base Ø: 9.5cm H: 2cm  
Beam Angle 40°  
Material Aluminium - Tempered Glass  
Special Feature 50cm Cable Available  
Spike & Base Included  
Color Graphite / **Code E283**



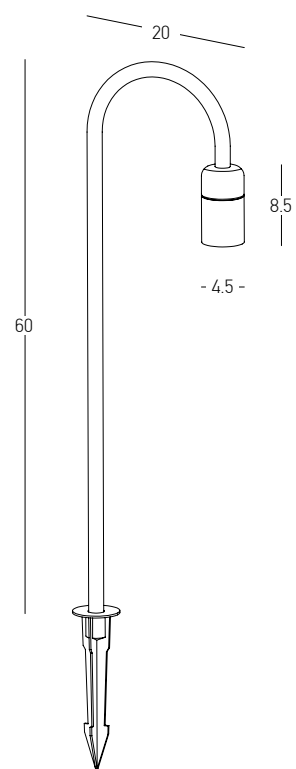

Power 6W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 500Lm  
Cri 80  
IP 65  
Dimensions L: 20cm W: 4.5cm H: 60cm  
Beam Angle 40°  
Material Aluminium - Tempered Glass  
Special Feature 40cm Cable Available  
Spike Included  
Color Dark Brown / **Code E279**




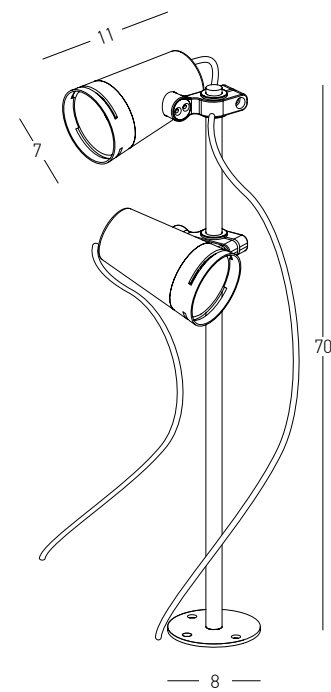

Power 13W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 1162Lm  
Cri 90  
IP 54  
Dimensions L: 11cm W: 11cm H: 70cm  
Base Ø: 8cm H: 0.5cm  
Beam Angle 40°  
Spots Ø: 5-7cm L: 11cm  
Material Aluminium - Tempered Glass  
Special Feature 110cm Cable Available (2 pcs)  
Movable - Rotational Spots  
Base Included


Color Dark Brown / **Code E299**






Power 15W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 1550Lm  
Cri 80  
IP 65  
Dimensions L: 2.5cm W: 2.5cm H: 100cm  
Base Ø: 9.5cm H: 2cm  
Material Aluminium - Opal PC Diffuser  
Special Feature 40cm Cable Available  
Spike & Base Included  
Profile 2.5 x 2.5cm  
  
Color Dark Brown / **Code E280**






Bulb 1x GU10 LED  
Power 7W MAX  
Input 220-240V, 50/60Hz  
IP 54  
Dimensions Ø: 6cm L: 11cm H: 6.2cm  
Material ABS - PC Diffuser  
Special Feature 30cm Cable Available  
Movable Spot  
Without Spike  
Color Black / **Code E311**

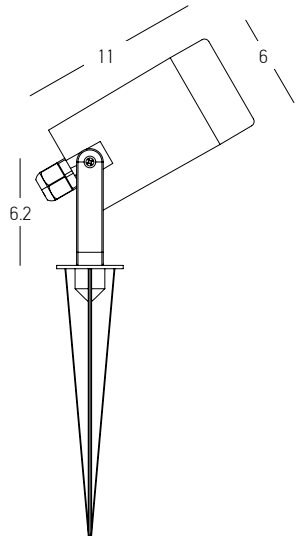


Bulb 1x GU10 LED  
Power 7W MAX  
Input 220-240V, 50/60Hz  
IP 54  
Dimensions Ø: 6cm L: 11cm H: 6.2cm  
Material ABS - PC Diffuser  
Special Feature 30cm Cable Available  
Movable Spot  
Spike Included  
Color Black / **Code E312**



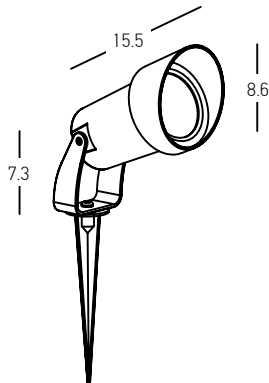


Bulb 1x GU10 LED  
Power 7W MAX  
Input 220-240V, 50/60Hz  
IP 54  
Dimensions Ø: 8.6cm L: 15.5cm H: 7.3cm  
Material ABS - Tempered Glass  
Special Feature 30cm Cable Available  
Movable Spot  
Spike Included  
Color Black / **Code E310**




Bulb 1x GU10 LED  
Power 5W MAX  
Input 220-240V, 50/60Hz  
IP 65  
Dimensions Ø: 6cm H: 16cm  
Material ABS - PC Diffuser  
Special Feature 30cm Cable Available  
Movable Spot  
Spike Included  
Color Black / **Code E217**




STEP | p.164-185

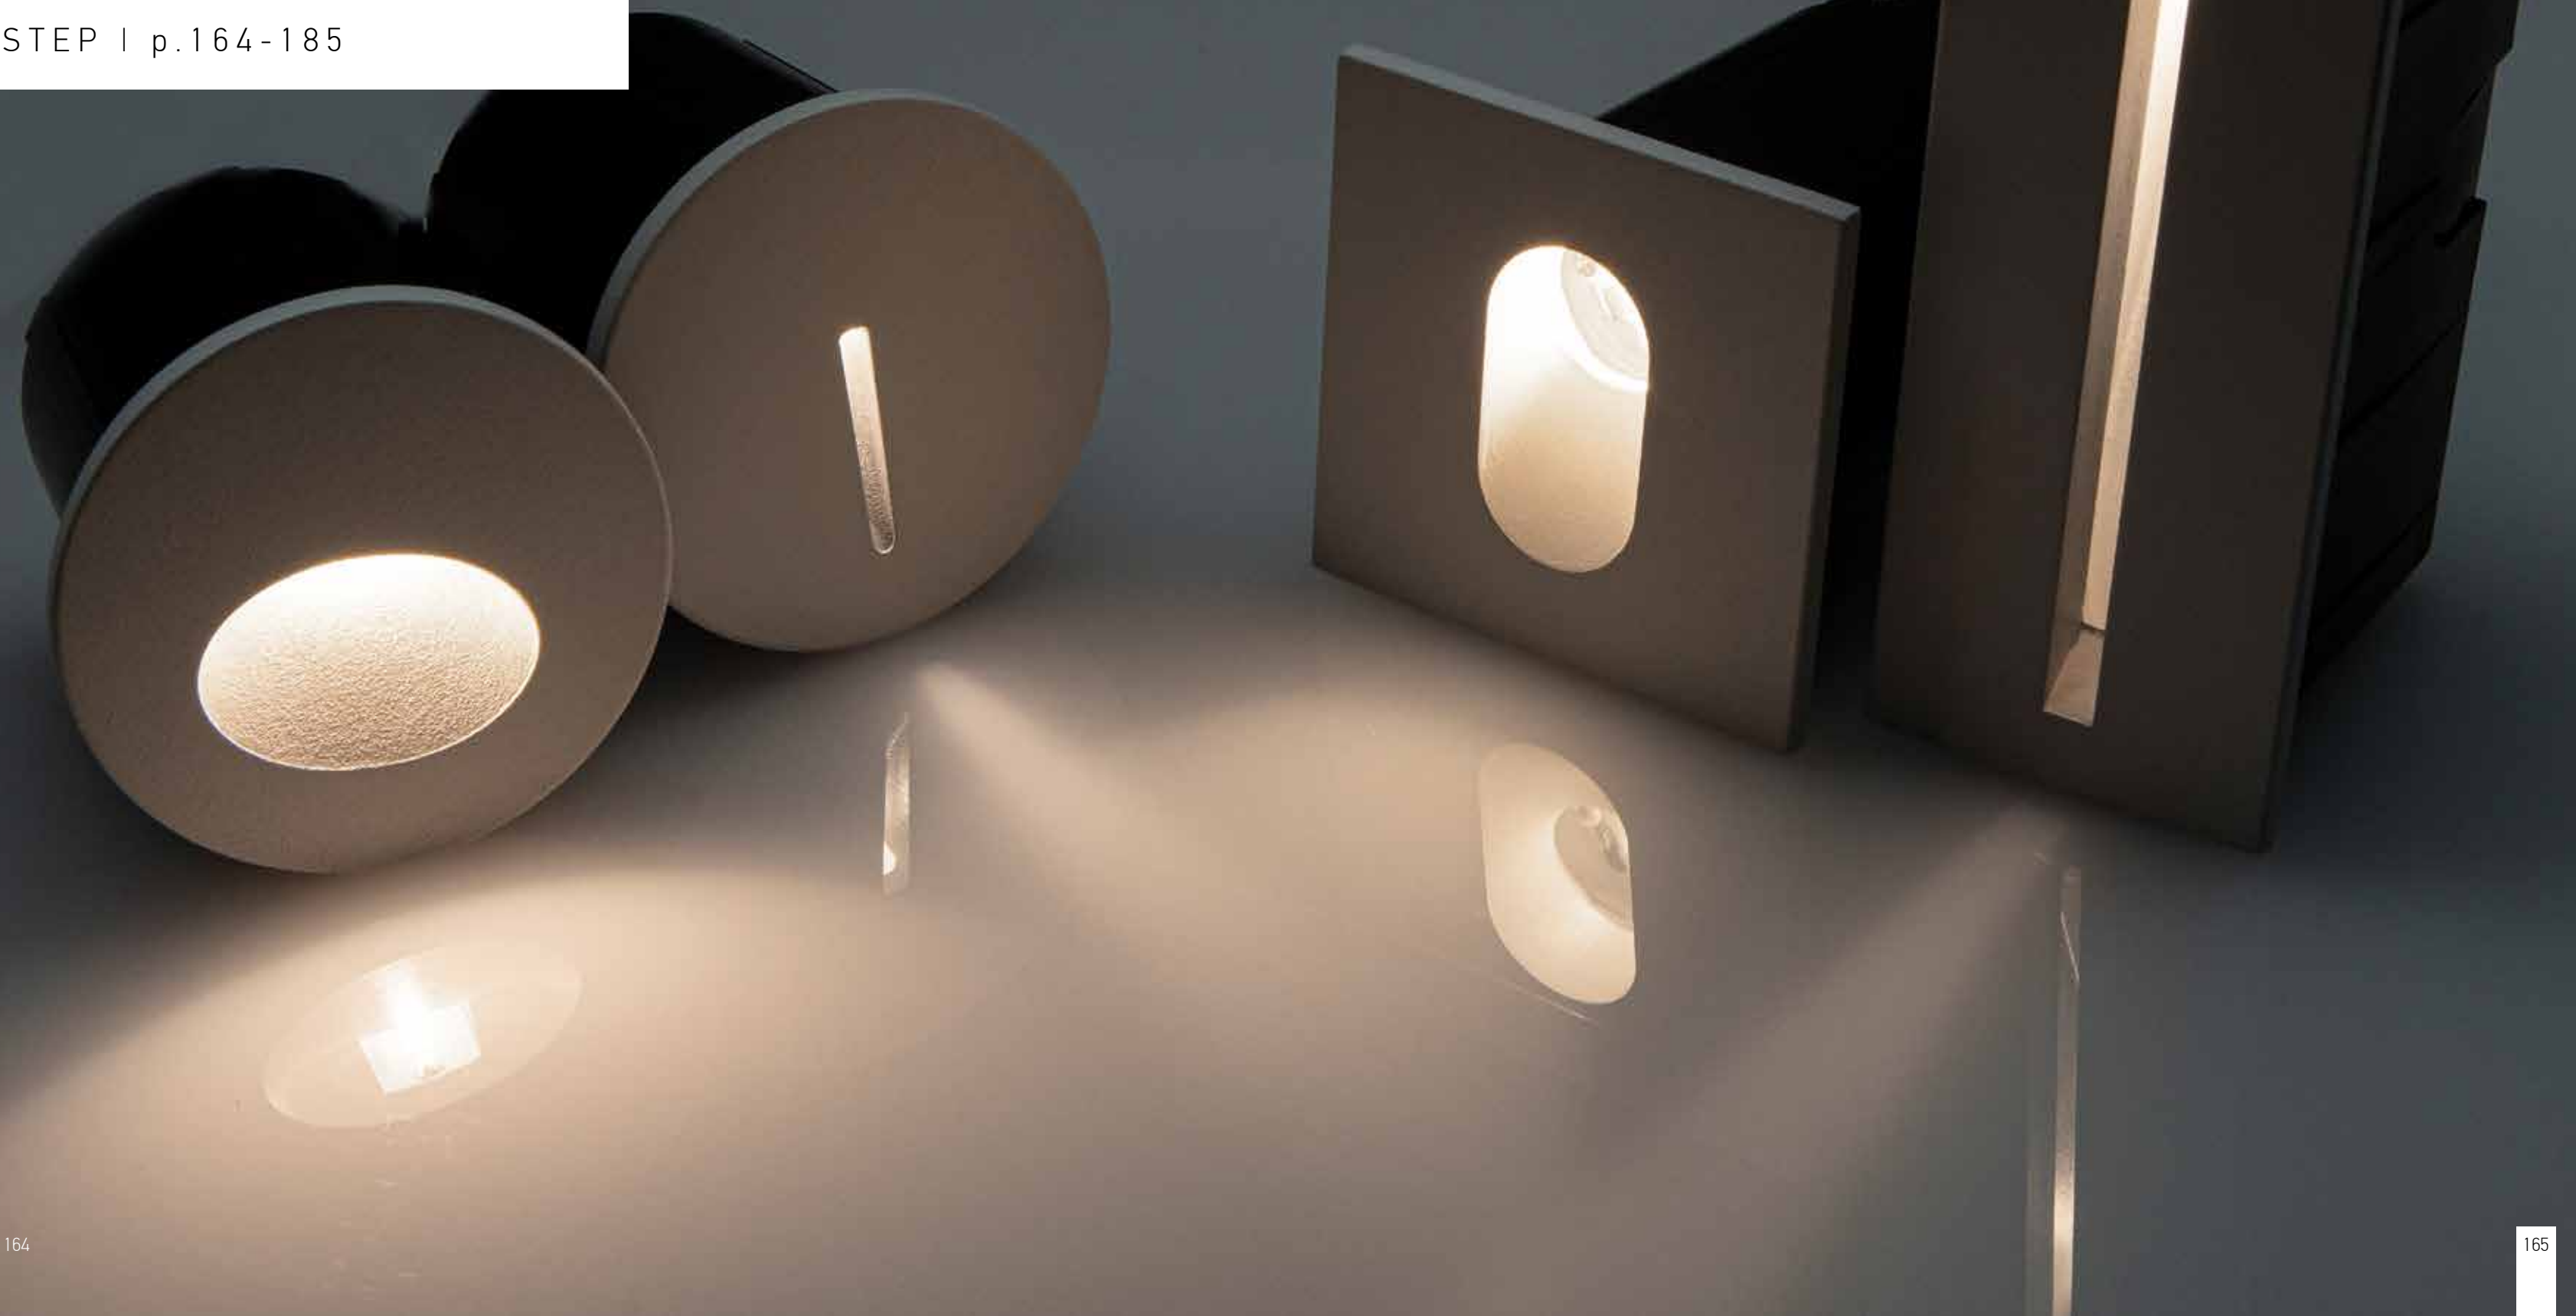


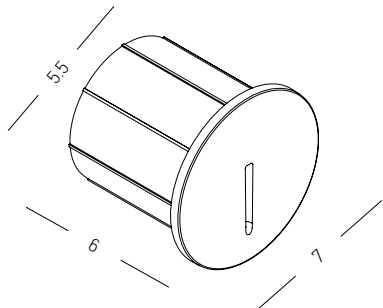


Power 3W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 92Lm  
Cri 90  
IP 65  
Dimensions Ø: 7cm L: 6.5cm  
Material Aluminium - Tempered Glass  
Depth Required 6cm  
Recessed Mounting Box Ø: 5.5cm L: 6cm (Included)  
Color Sandy White / **Code E321**

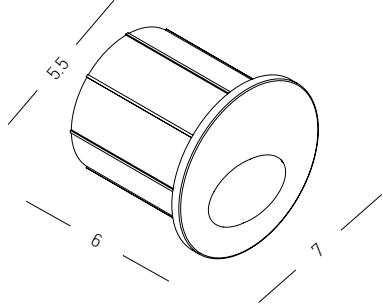


Power 3W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 133Lm  
Cri 90  
IP 65  
Dimensions Ø: 7cm L: 6.5cm  
Material Aluminium - Tempered Glass  
Depth Required 6cm  
Recessed Mounting Box Ø: 5.5cm L: 6cm (Included)  
Color Sandy White / **Code E320**

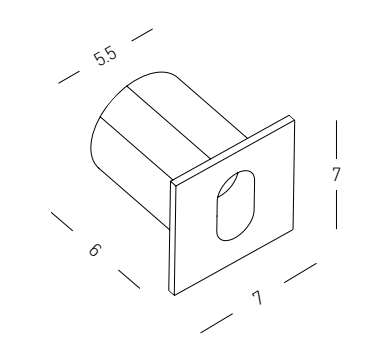



Power 3W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 133Lm  
Cri 90  
IP 65  
Dimensions L: 7.5cm W: 7cm H: 7cm  
Material Aluminium - Tempered Glass  
Depth Required 7cm  
Recessed Mounting Box Ø: 5.5cm L: 7cm (Included)  
Color Sandy White / **Code E319**

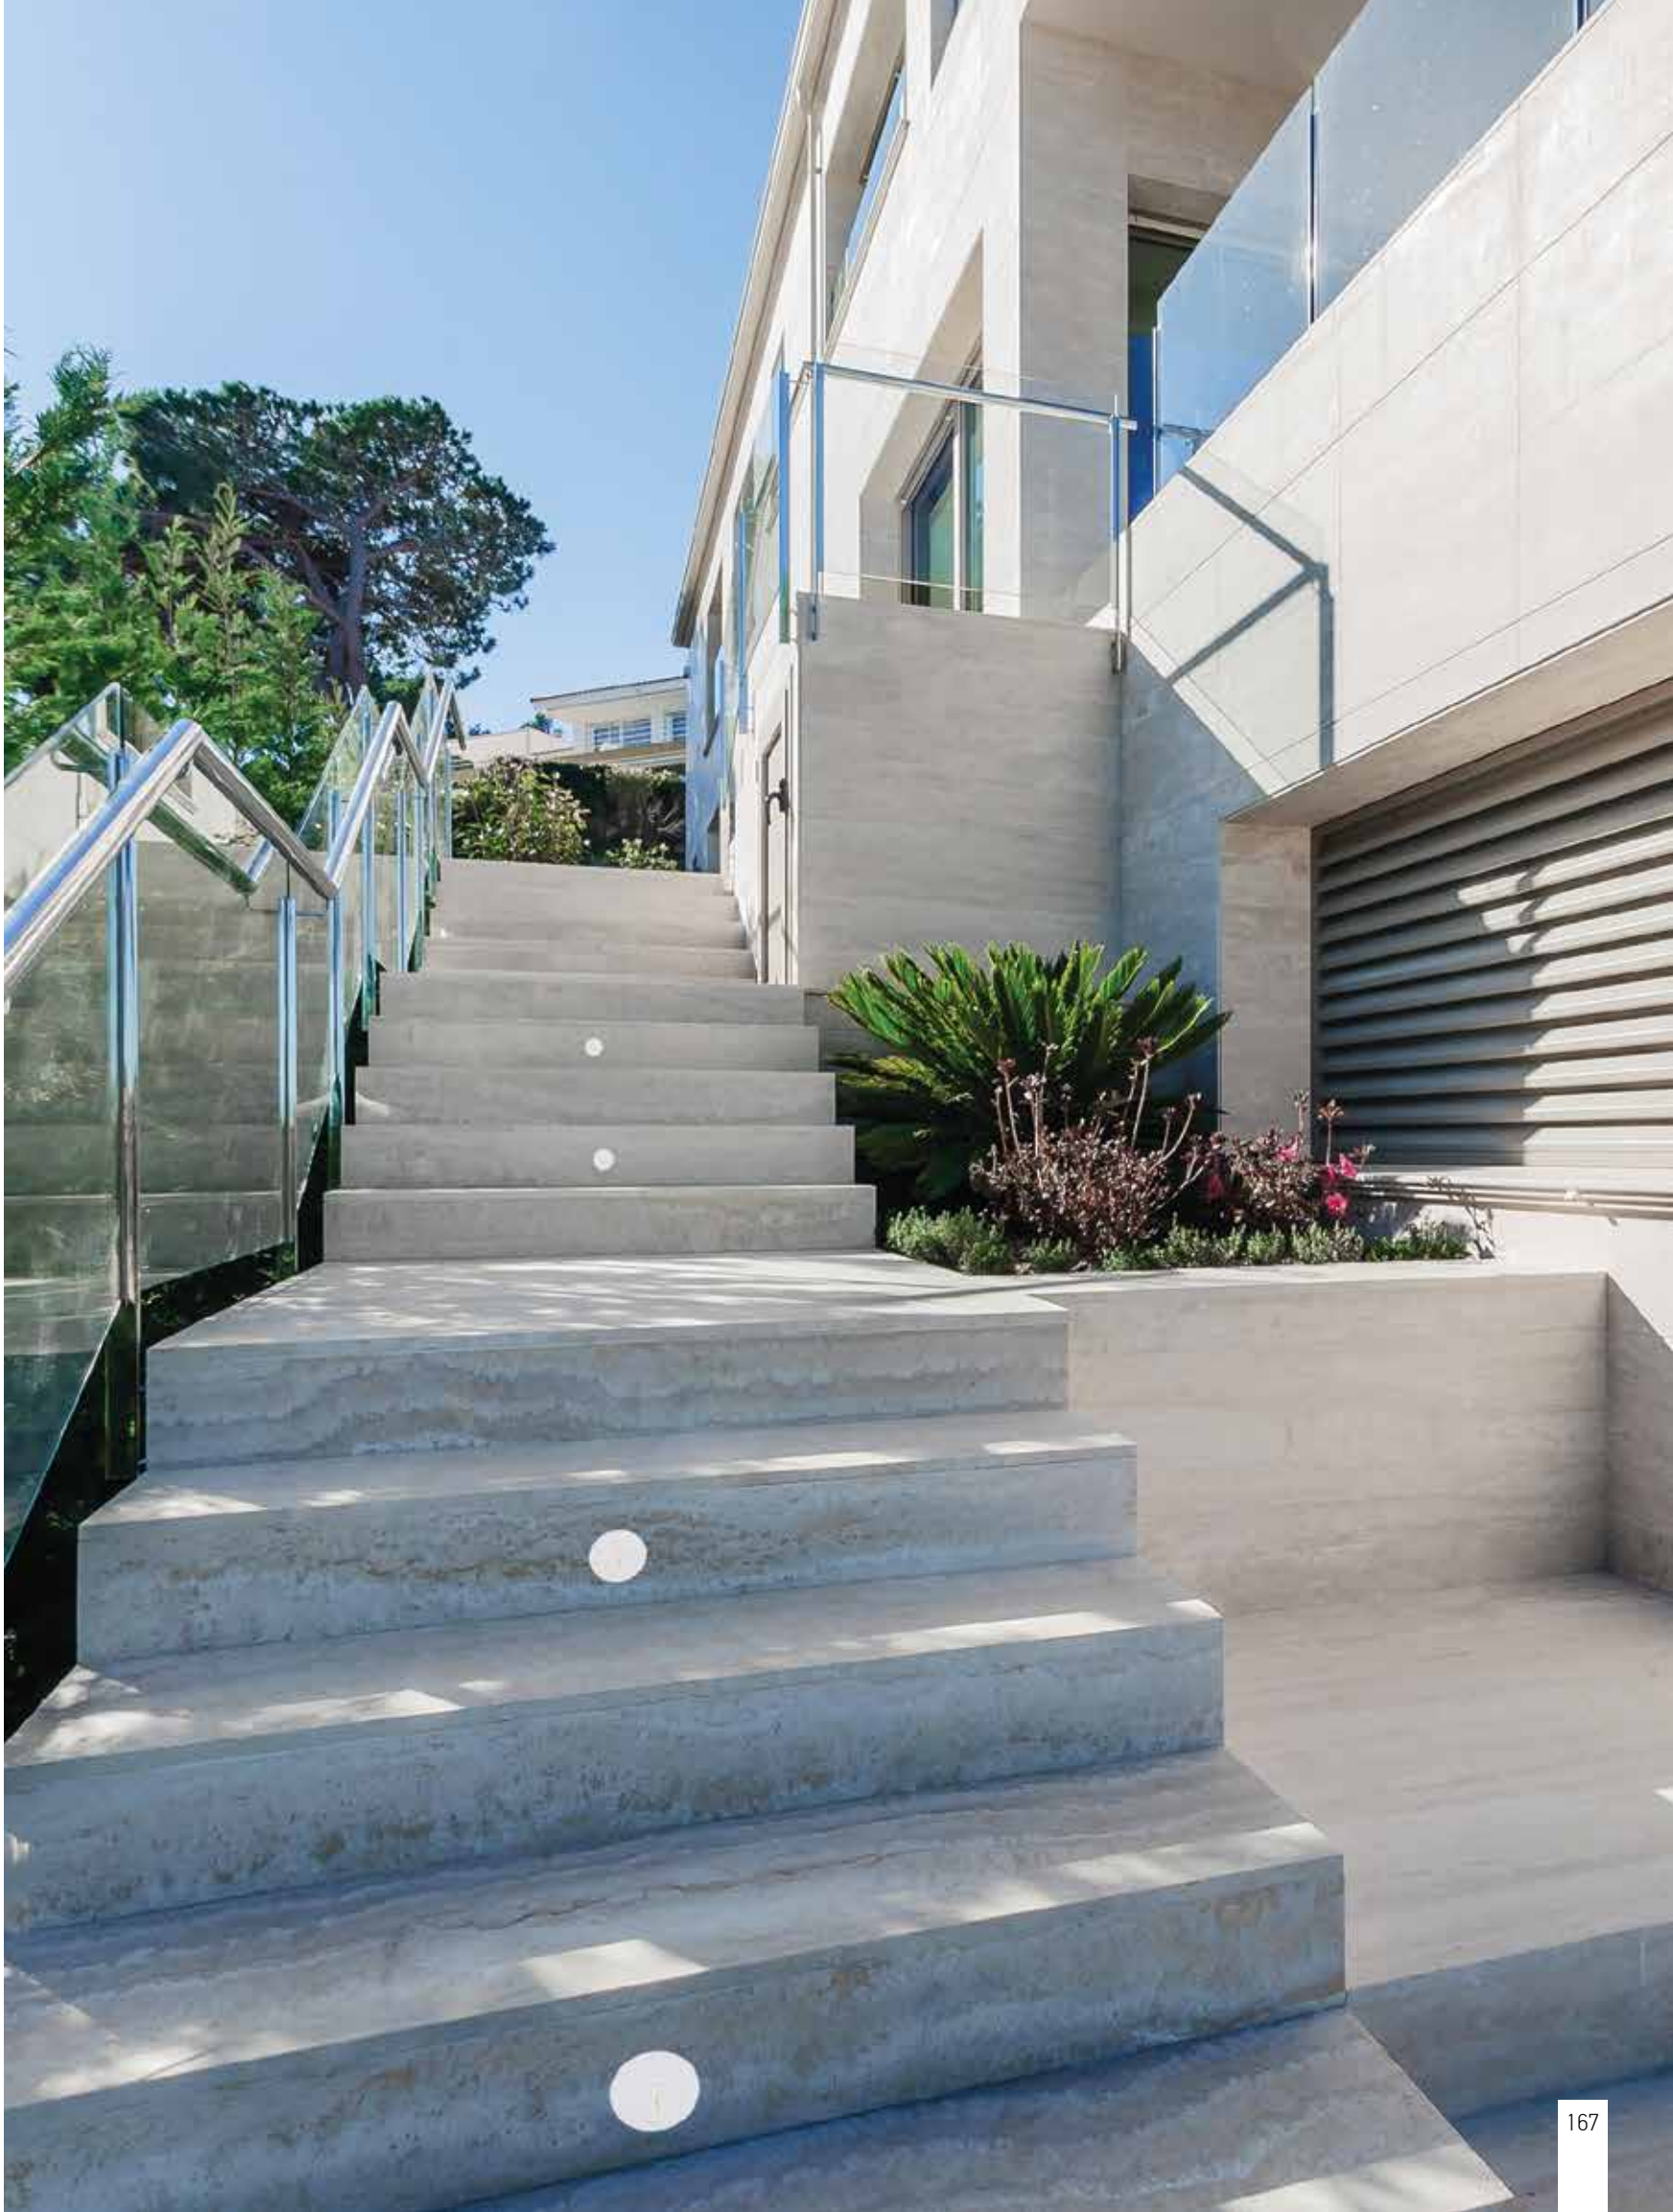

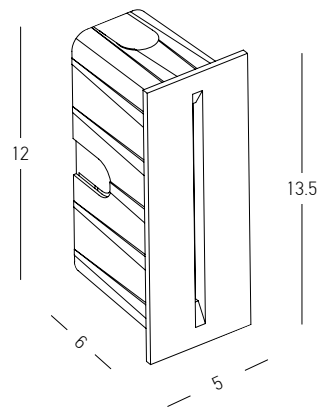


Power 3W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 92Lm  
Cri 90  
IP 65  
Dimensions L: 6.5cm W: 5cm H: 13.5cm  
Material Aluminium - Tempered Glass  
Depth Required 6cm  
Recessed Mounting Box L: 6cm W: 4.3cm H: 12.6cm (Included)  
Color Sandy White / **Code E322**

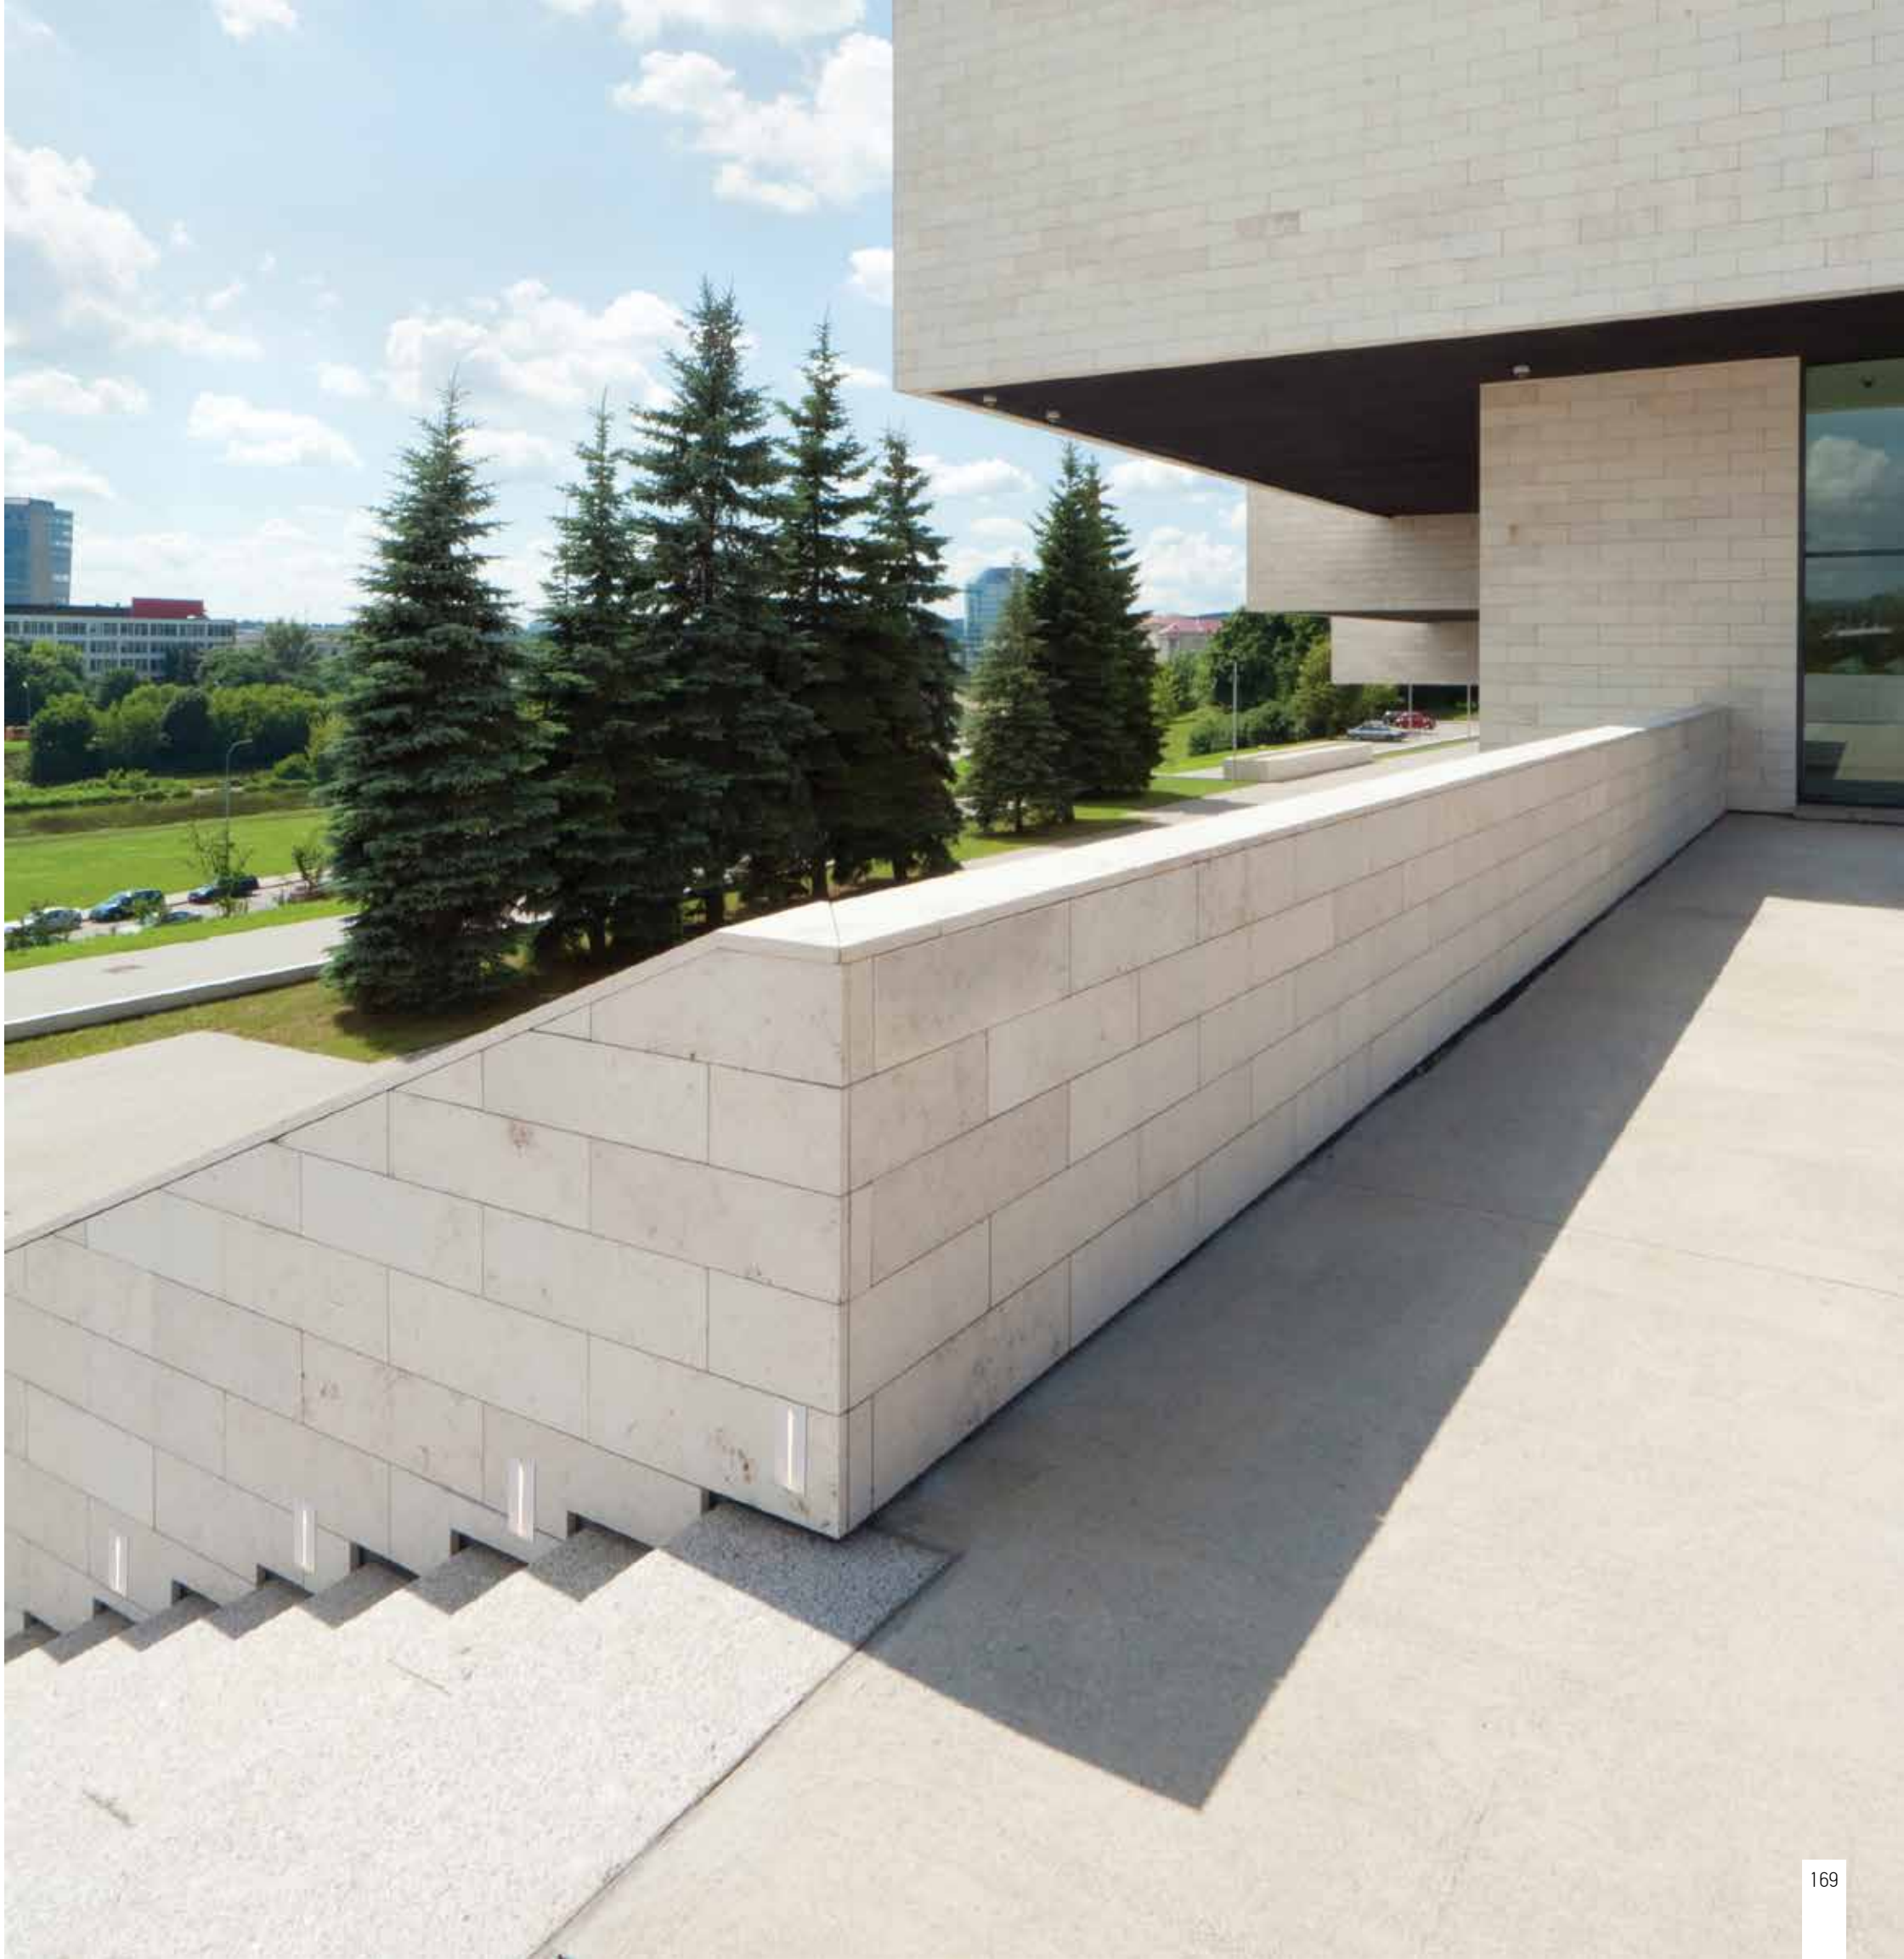


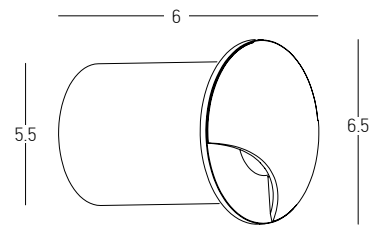


Power 3W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 230Lm  
Cri 90  
IP 65  
Dimensions Ø: 6.5cm L: 6cm  
Material Aluminium - PC Diffuser  
Depth Required 6cm  
Recessed Mounting Box Ø: 5.5cm L: 6cm (Included)  
Color Sandy Black / **Code E300**

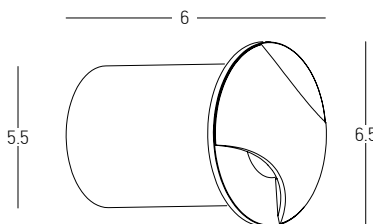


Power 3W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 290Lm  
Cri 90  
IP 65  
Dimensions Ø: 6.5cm L: 6cm  
Material Aluminium - PC Diffuser  
Depth Required 6cm  
Recessed Mounting Box Ø: 5.5cm L: 6cm (Included)  
Color Sandy Black / **Code E301**

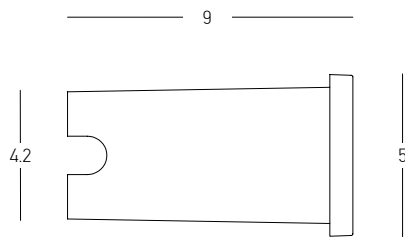


Power 2W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 200Lm  
Cri 80  
IP 65  
Dimensions Ø: 5cm L: 9cm  
Material Stainless Steel- PC Diffuser  
Depth Required 8cm  
Recessed Mounting Box Ø: 4.2cm L: 8cm (Included)  
Color Stainless Steel / **Code E288**

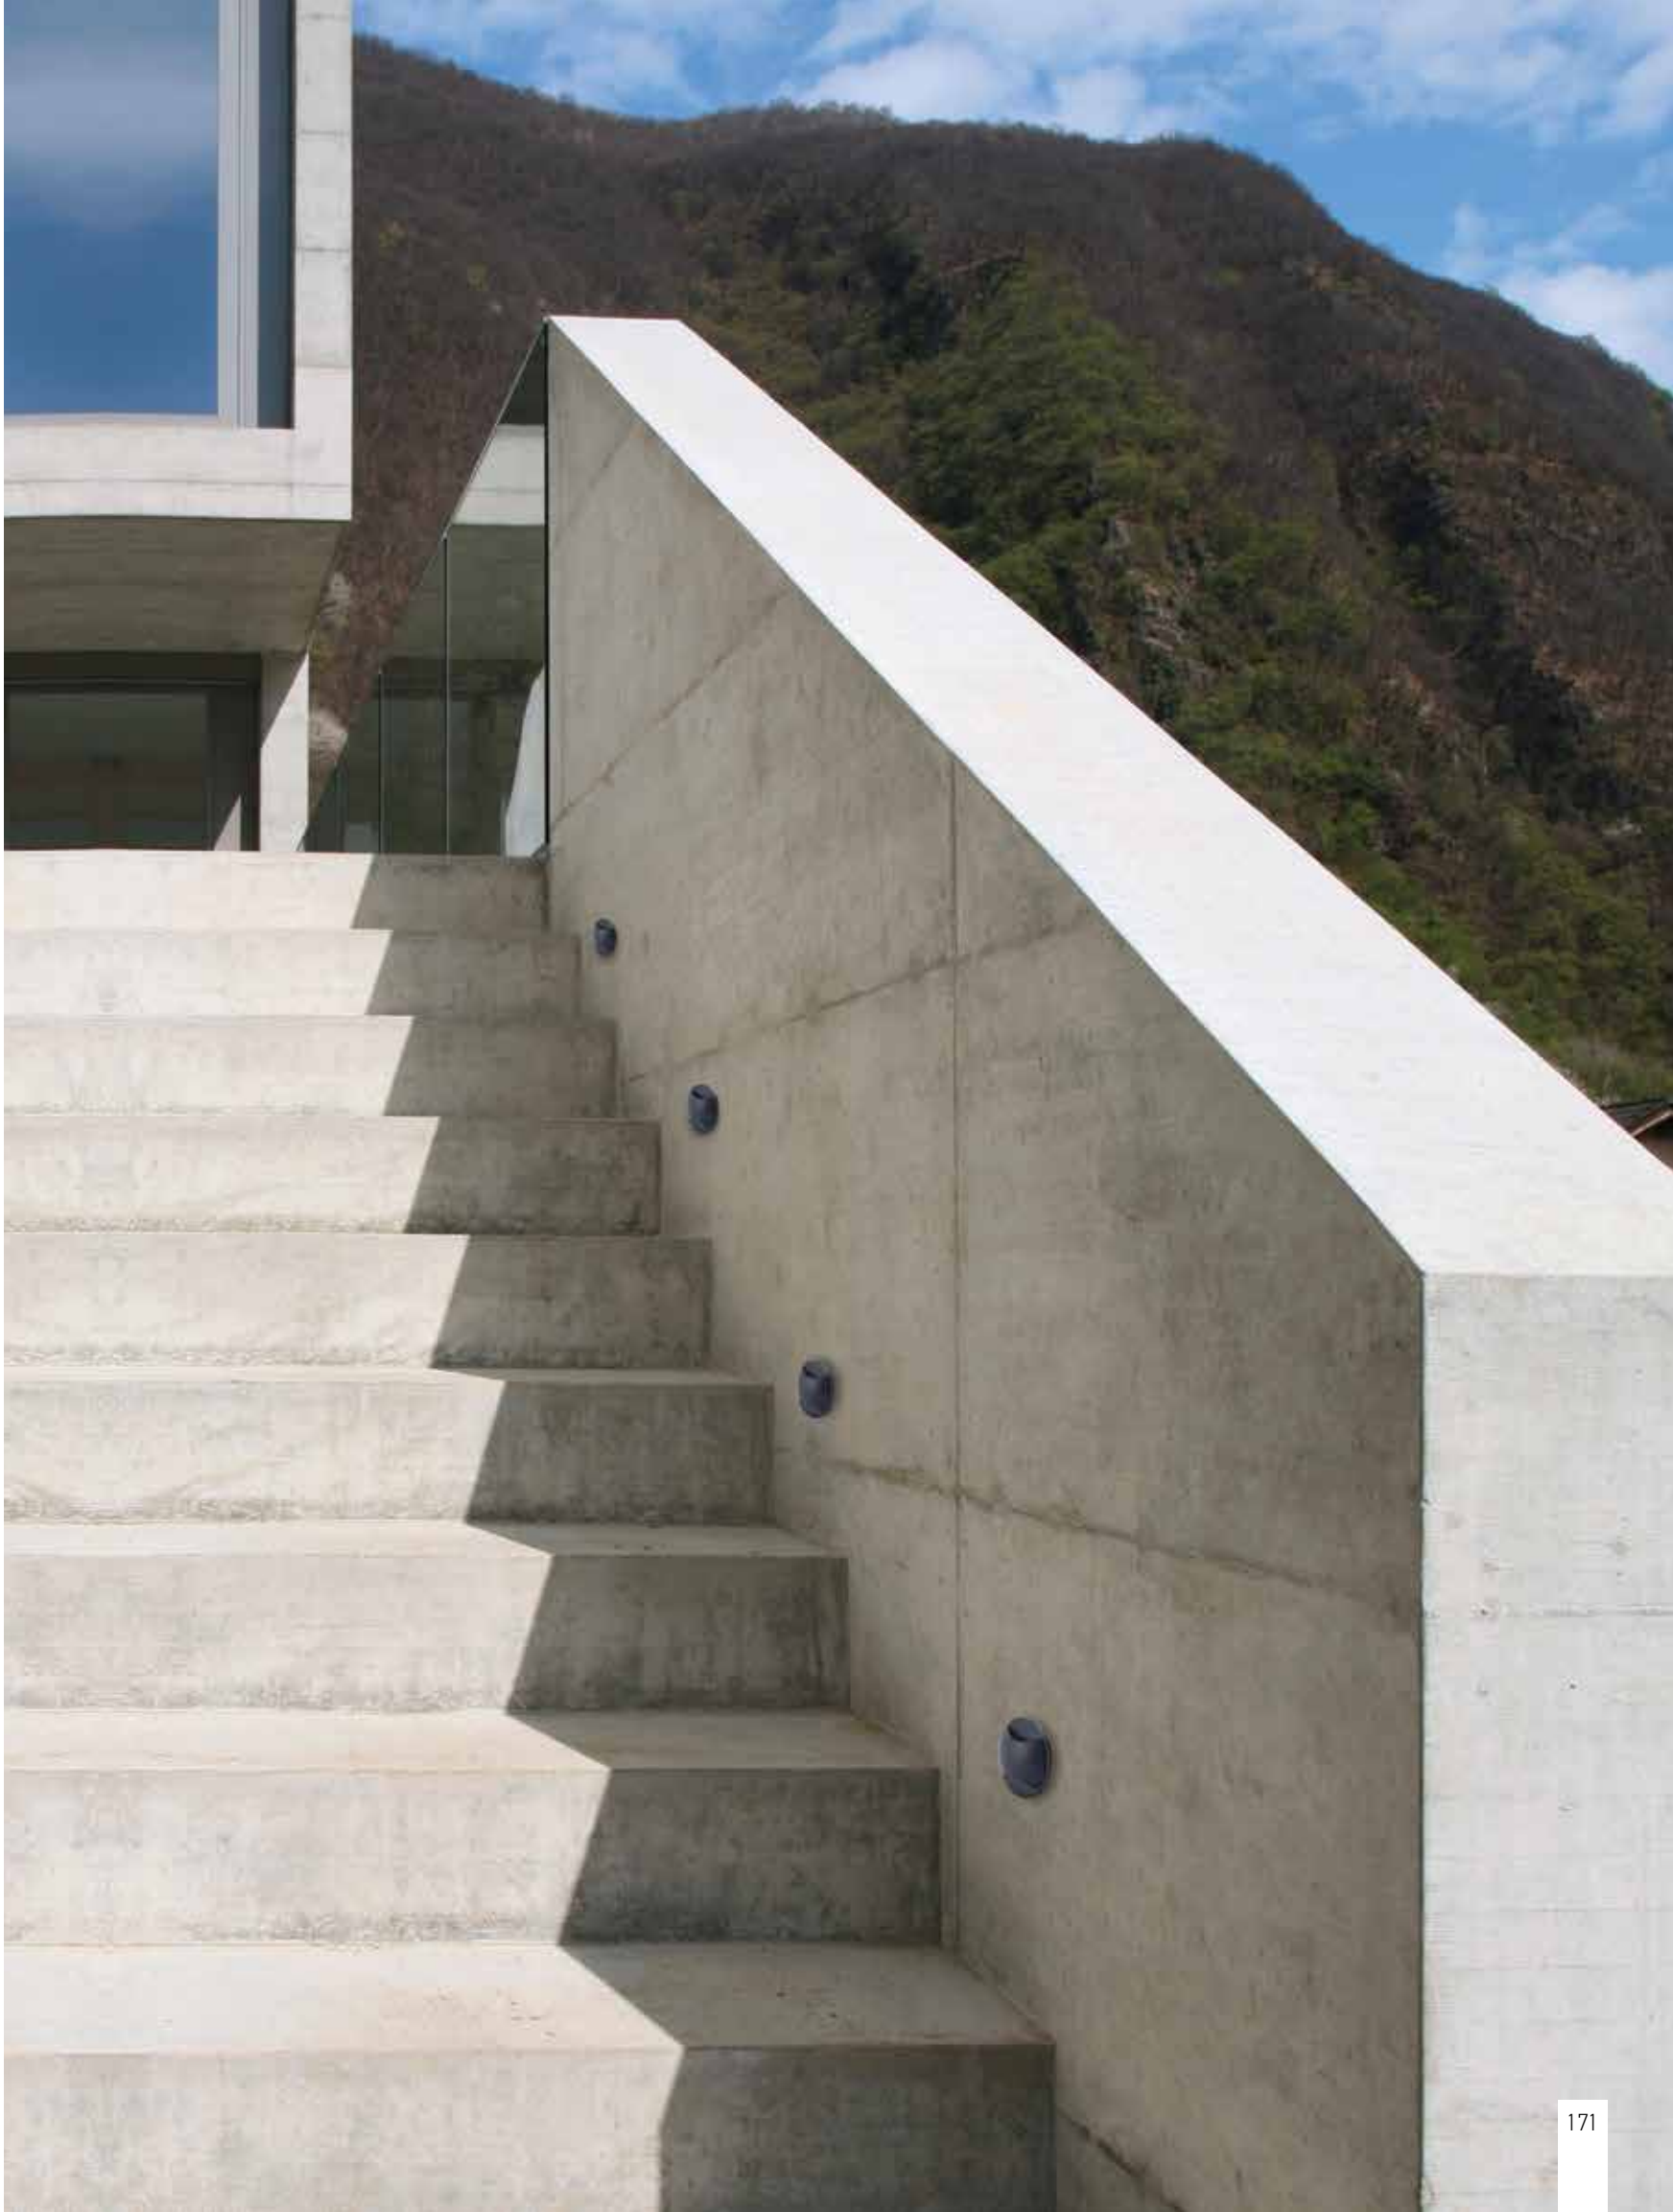

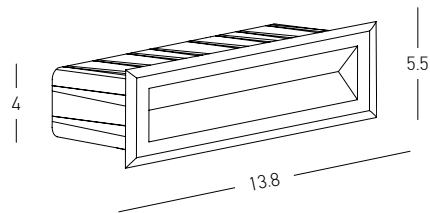


Power 5W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 302Lm  
Cri 80  
IP 65  
Dimensions L: 6.5cm W: 13.8cm H: 5.5cm  
Material Aluminium - Tempered Glass  
Depth Required 6cm  
Recessed Mounting Box L: 6cm W: 13cm H: 4cm (Included)  
Color Graphite / **Code E324**




Power 3W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 195Lm  
Cri 80  
IP 65  
Dimensions L: 6.5cm W: 8.5cm H: 5.5cm  
Material Aluminium - Tempered Glass  
Depth Required 6cm  
Recessed Mounting Box L: 6cm W: 8cm H: 4cm (Included)

Color Graphite / **Code E323**



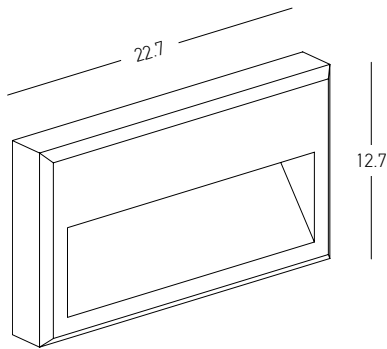


Power 6W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 420Lm  
Cri 80  
IP 65  
Dimensions L: 3.5cm W: 22.7cm H: 12.7cm  
Material Aluminium - Tempered Glass  
Color Graphite / **Code E347**

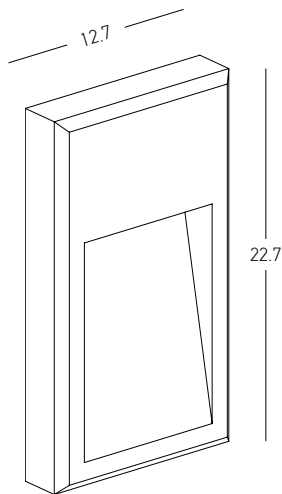


Power 6W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 420Lm  
Cri 80  
IP 65  
Dimensions L: 3.5cm W: 12.7cm H: 22.7cm  
Material Aluminium - Tempered Glass  
Color Graphite / **Code E346**



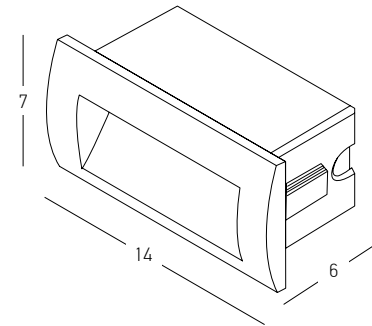


Power 4W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 188Lm  
Cri 80  
IP 65  
Dimensions L: 6cm W: 14cm H: 7cm  
Depth 6cm  
Material Aluminium - PC Diffuser  
Recessed Mounting Box L: 6cm W: 13cm H: 6cm (Included)  
Color Graphite / **Code E247-G**  
Color Sandy White / **Code E247-W**




Power 2W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 65Lm  
Cri 80  
IP 65  
Dimensions L: 6cm W: 9cm H: 9cm  
Depth 6cm  
Material Aluminium - PC Diffuser  
Recessed Mounting Box L: 6cm W: 6cm H: 8cm (Included)  
Color Graphite / **Code E246-G**  
Color Sandy White / **Code E246-W**






Power 7W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 480Lm  
Cri 80  
IP 65  
Dimensions L: 3.7cm W: 15cm H: 15cm  
Material Aluminium - PC Diffuser  
Color Graphite / **Code E241-G**  
Sandy White / **Code E241-W**




Power 7W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 480Lm  
Cri 80  
IP 65  
Dimensions Ø: 15cm L: 3.7cm  
Material Aluminium - PC Diffuser  
Color Graphite / **Code E242-G**  
Sandy White / **Code E242-W**




Power 2W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 190Lm  
Cri 80  
IP 65  
Dimensions Ø: 10.5cm L: 3.7cm  
Material Aluminium - PC Diffuser  
Color Graphite / **Code E294**



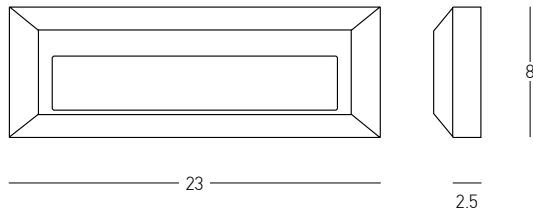


Power 3W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 132Lm  
Cri 80  
IP 65  
Dimensions L: 2.5cm W: 23cm H: 8cm  
Material ABS  
Color Graphite / **Code E229**




Power 2W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 69Lm  
Cri 80  
IP 65  
Dimensions L: 2.5cm W: 12.5cm H: 12.5cm  
Material ABS  
Color Graphite / **Code E230**






Power 3W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 92Lm  
Cri 80  
IP 54  
Dimensions Ø: 13.5cm L: 3.2cm  
Material ABS  
Color Graphite / **Code E183**  
White / **Code E184**




Power 2W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 88Lm  
Cri 80  
IP 54  
Dimensions L: 3.3cm W: 10cm H: 6cm  
Material ABS  
Color Graphite / **Code E181**  
White / **Code E182**






Power 1.5W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 90Lm  
Cri 80  
IP 65  
Dimensions L: 1.5cm W: 9cm H: 12cm  
Material ABS - PC Diffuser  
Color White / **Code E187**




Power 4W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 185Lm  
Cri 80  
IP 65  
Dimensions L: 6cm W: 9cm H: 9cm  
Depth 6cm  
Material Aluminium - Tempered Glass  
Recessed Mounting Box L: 6cm W: 8cm H: 8cm (Included)  
Color Black / **Code E248**

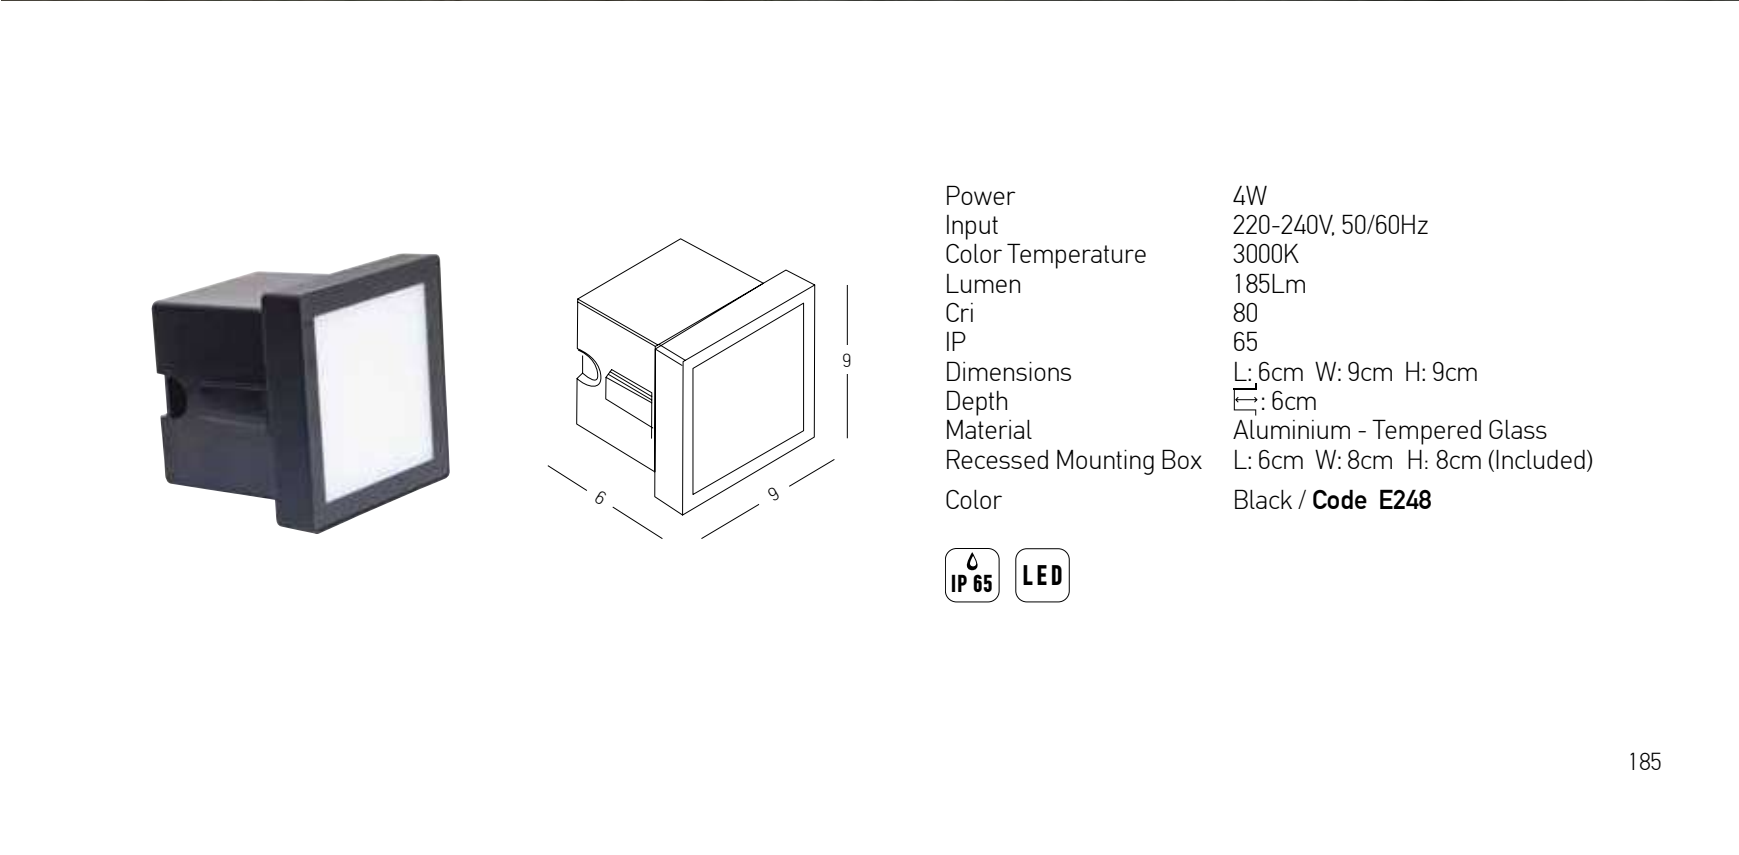


CEILING | p.186-199




Power 12W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 757Lm  
Cri 90  
IP 65  
Dimensions L: 15.7cm W: 5cm H: 6.8cm  
Cutting Hole 14.2 x 3.5cm  
Beam Angle 40°  
Non Dimmable ☒  
Material Stainless Steel - Aluminium - Tempered Glass  
Depth Required JT: 6cm  
Driver Included  
Color Sandy Black / **Code E332**  
Sandy White / **Code E333**

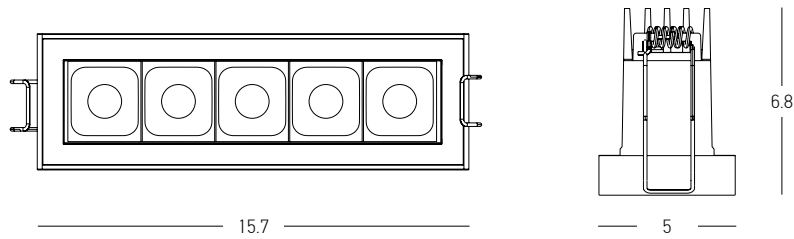




Power 12W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 561Lm  
Cri 90  
IP 54  
Dimensions Ø: 8cm H: 5.5cm  
Beam Angle 120°  
Material Aluminium  
Color Sandy Black / **Code S131**  
Color Sandy White / **Code S132**




Power 8W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 454Lm  
Cri 80  
IP 54  
Dimensions Ø: 6.5cm H: 4.5cm  
Beam Angle 120°  
Material Aluminium  
Color Sandy Black / **Code S133**  
Color Sandy White / **Code S134**






Power 6W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 500Lm  
Cri 90  
IP 54  
Dimensions Ø: 6.3cm H: 7.5cm  
Beam Angle 20°  
Material Aluminium - Glass  
Special Feature Driver Included  
Color Sandy Black / **Code S112**  
Color Sandy White / **Code S113**

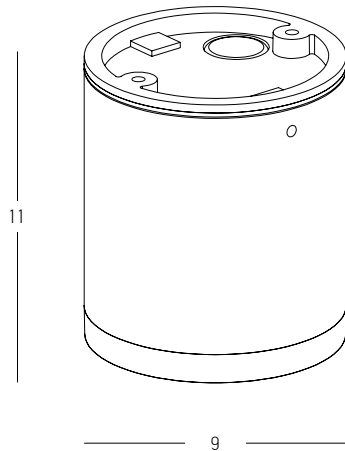


Power 8W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 597Lm  
Cri 80  
IP 65  
Dimensions Ø: 9cm H: 11cm  
Material Aluminium - Tempered Glass  
Color Graphite / **Code E340**






Bulb 1x GU10 LED  
Power 7W MAX  
Input 220-240V, 50/60Hz  
IP 54  
Dimensions Ø: 6cm H: 10.5cm  
Material Aluminium - Glass Diffuser  
Color Sandy Black / **Code E219**  
Color Sandy White / **Code E220**

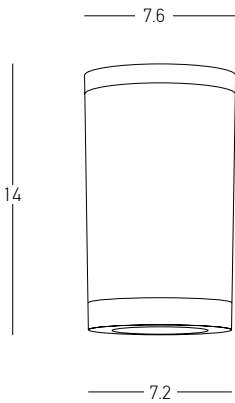

Bulb 1x GU10 LED  
Power 7W MAX  
Input 220-240V, 50/60Hz  
IP 54  
Dimensions Ø: 7.2-7.6cm H: 14cm  
Material ABS - Acrylic  
Color White Matt / **Code E308**  
Color Black Matt / **Code E309**



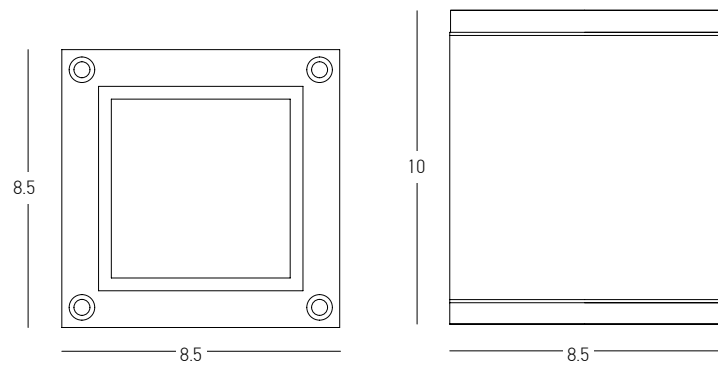



Bulb 1x GU10  
Power 35W MAX  
Input 220-240V, 50/60Hz  
IP 65  
Dimensions L: 8.5cm W: 8.5cm H: 10cm  
Material Aluminium - Glass  
Color Graphite / **Code E269**  
Color Sandy White / **Code E270**






Power 20W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 2041Lm  
Cri 80  
IP 65  
Dimensions Ø: 27cm H: 7.5cm  
Material Aluminium - PC Diffuser  
Special Feature Driver Included  
Color Sandy White / **Code E326**  
Color Graphite / **Code E327**

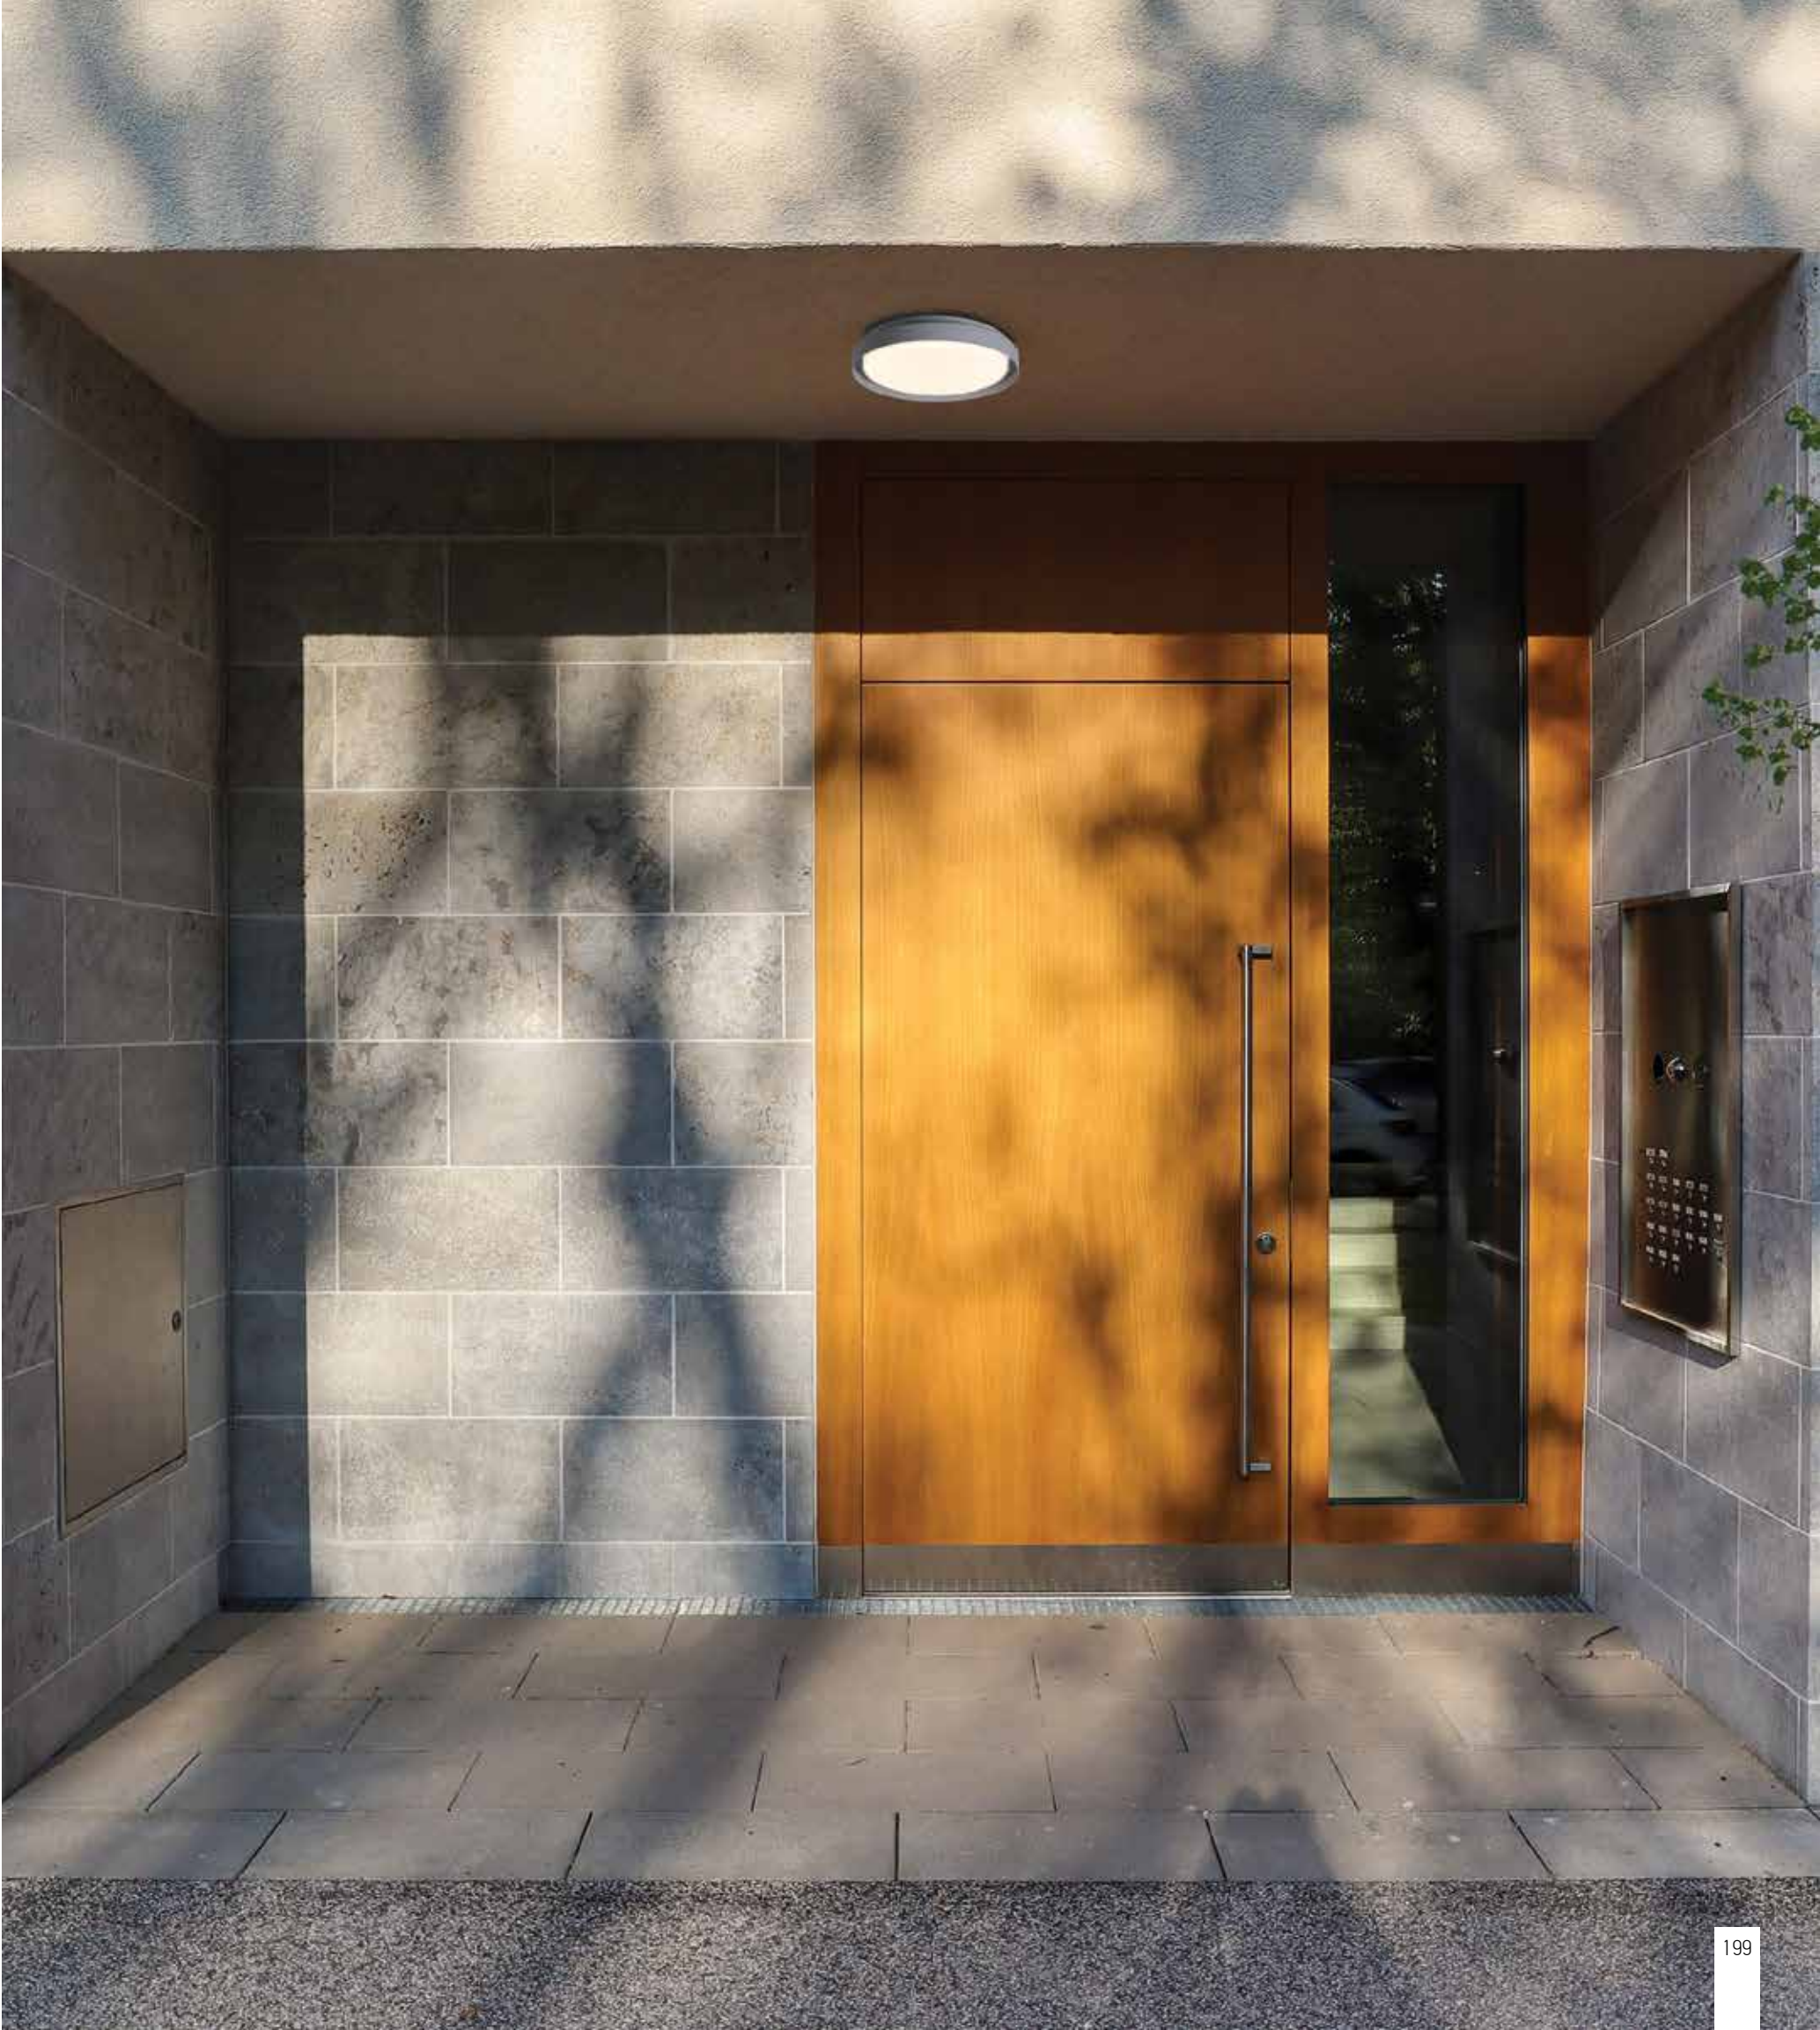

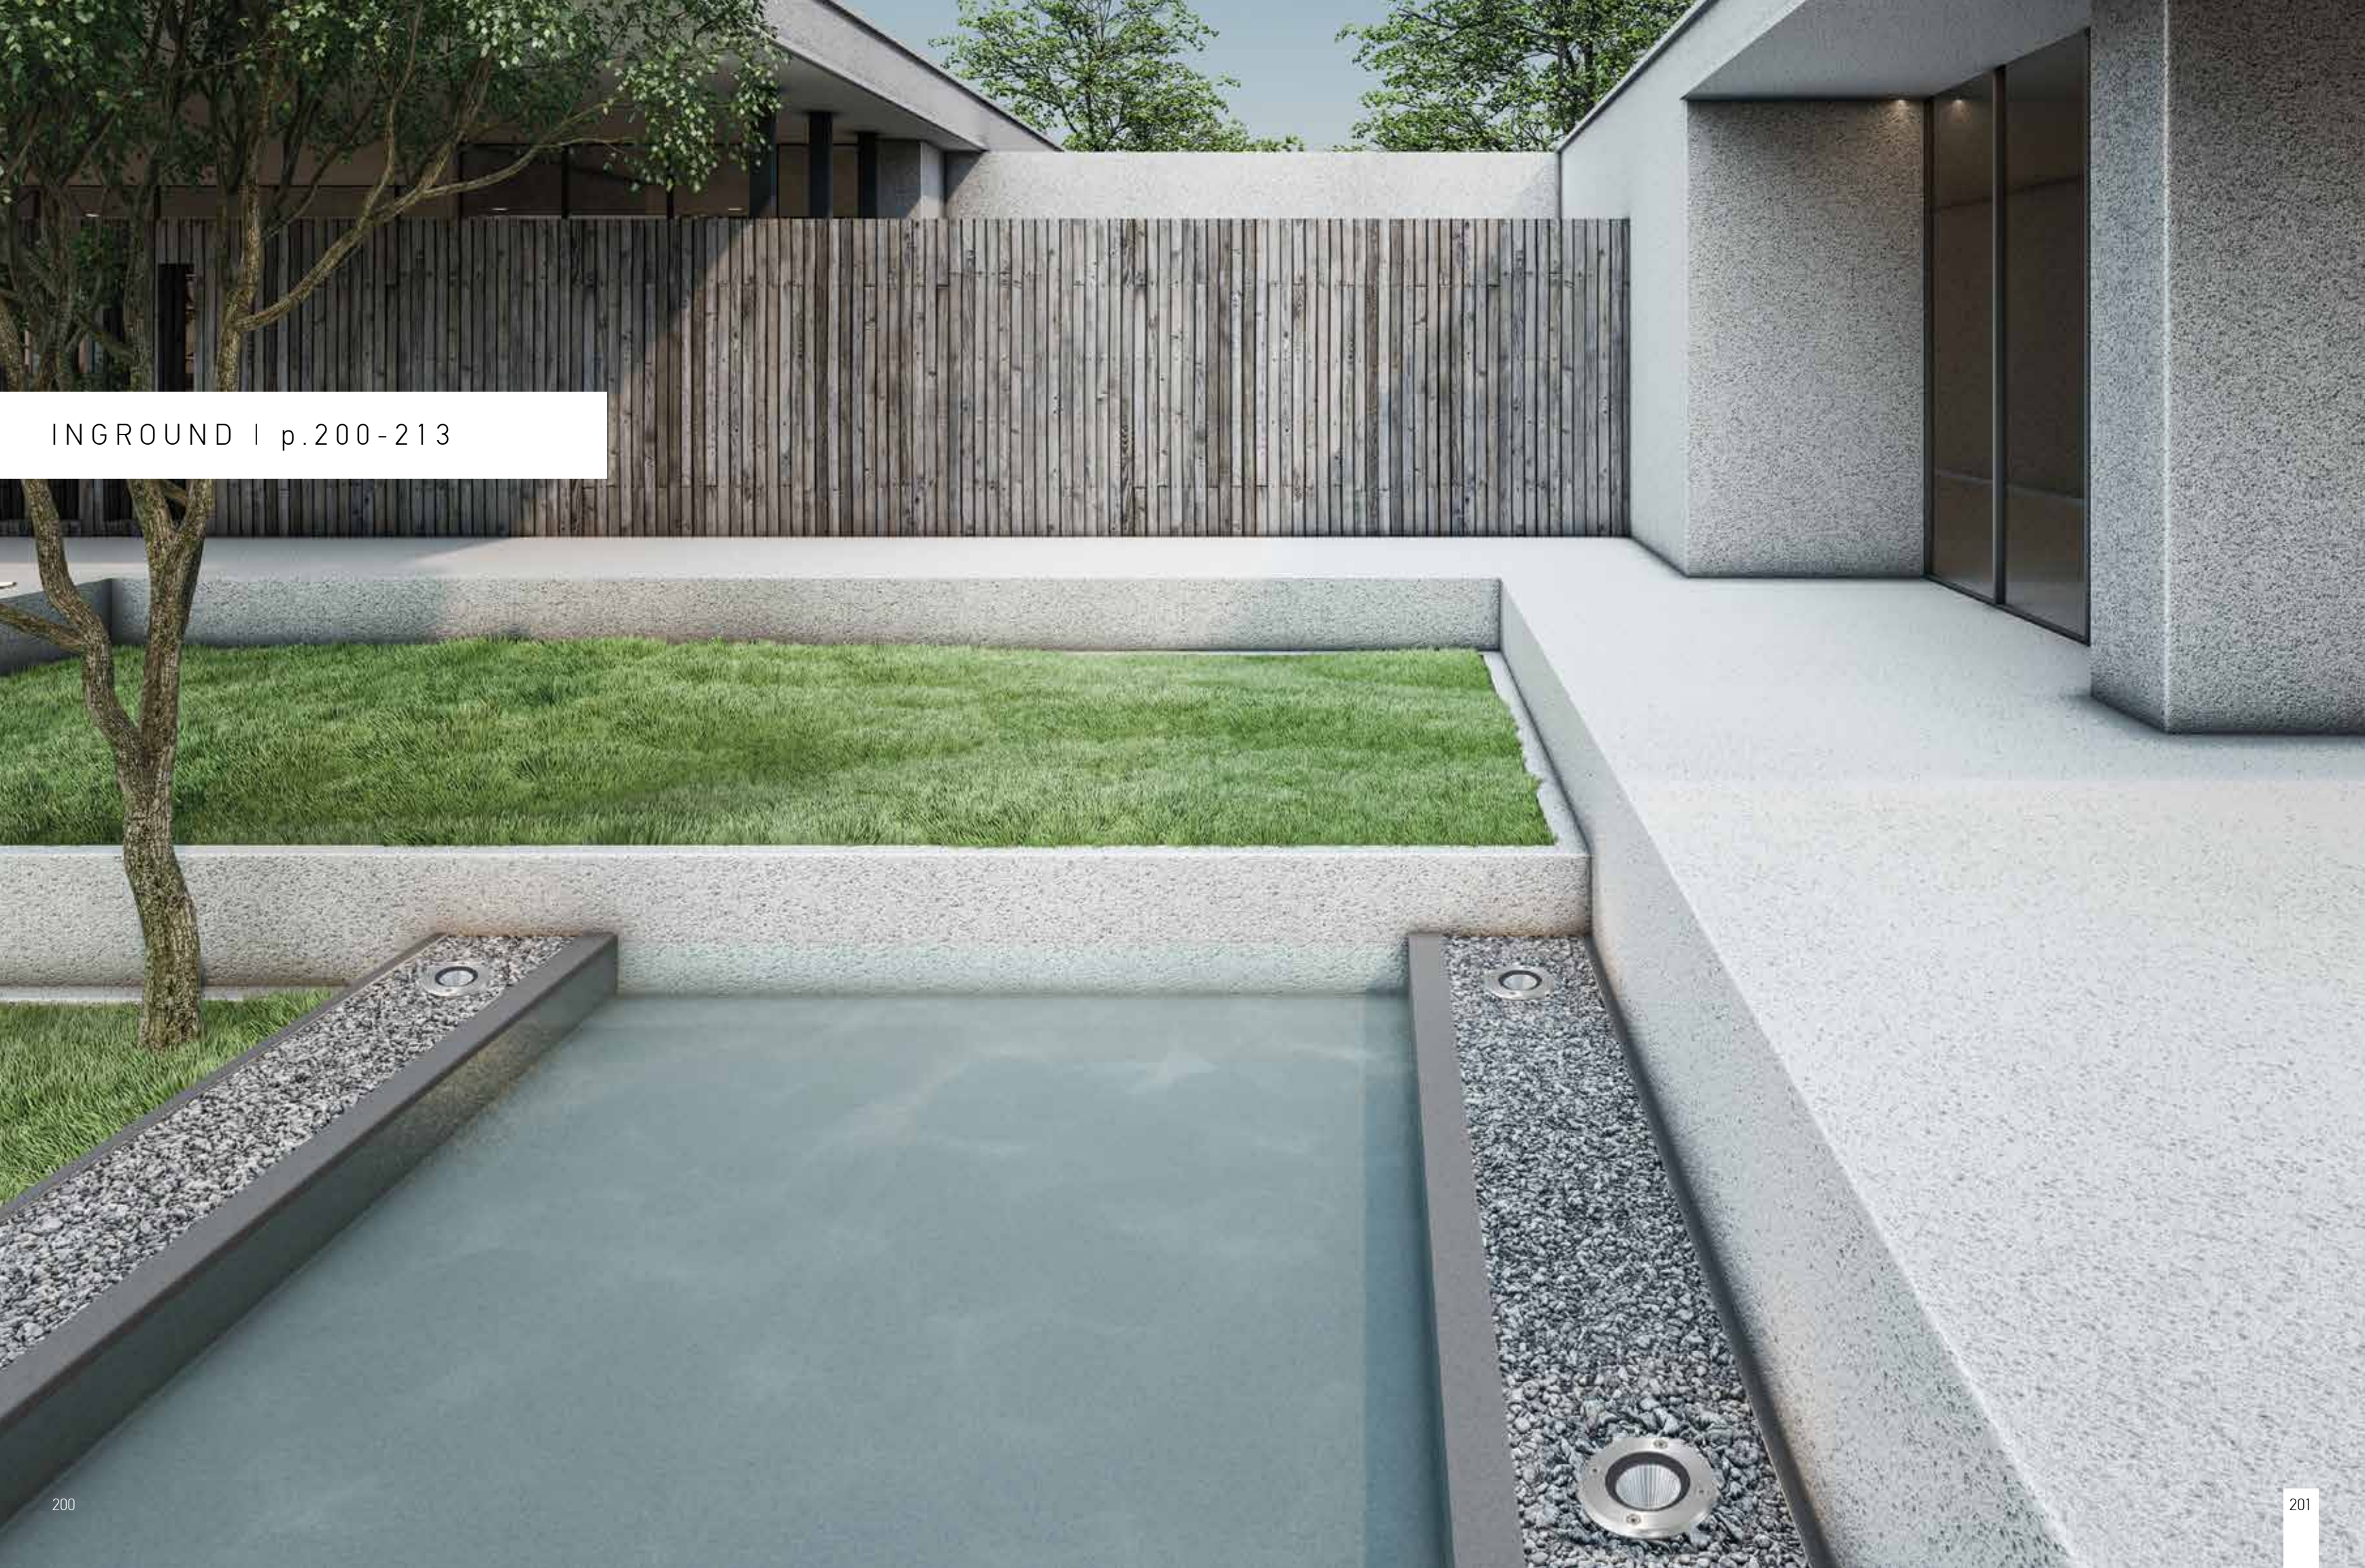


INGROUND | p.200-213



Asymmetric

Power 7W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 560Lm  
Cri 80  
IP 67  
IK 8  
Dimensions Ø: 15cm H: 11.5cm  
Beam Angle 45°  
Material Stainless Steel - Tempered Glass  
Depth Required 11.5cm  
Recessed Mounting Box Included  
Special Feature Asymmetric  
50cm Cable Available  
Driver Included


Color Stainless Steel / **Code E363**




Asymmetric


Power 7W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 560Lm  
Cri 80  
IP 67  
IK 8  
Dimensions Ø: 13cm H: 14cm  
Beam Angle 45°  
Material Stainless Steel - Tempered Glass  
Depth Required 15cm  
Recessed Mounting Box Included  
Special Feature Asymmetric  
50cm Cable Available  
Driver Included

Color Stainless Steel / **Code E362**

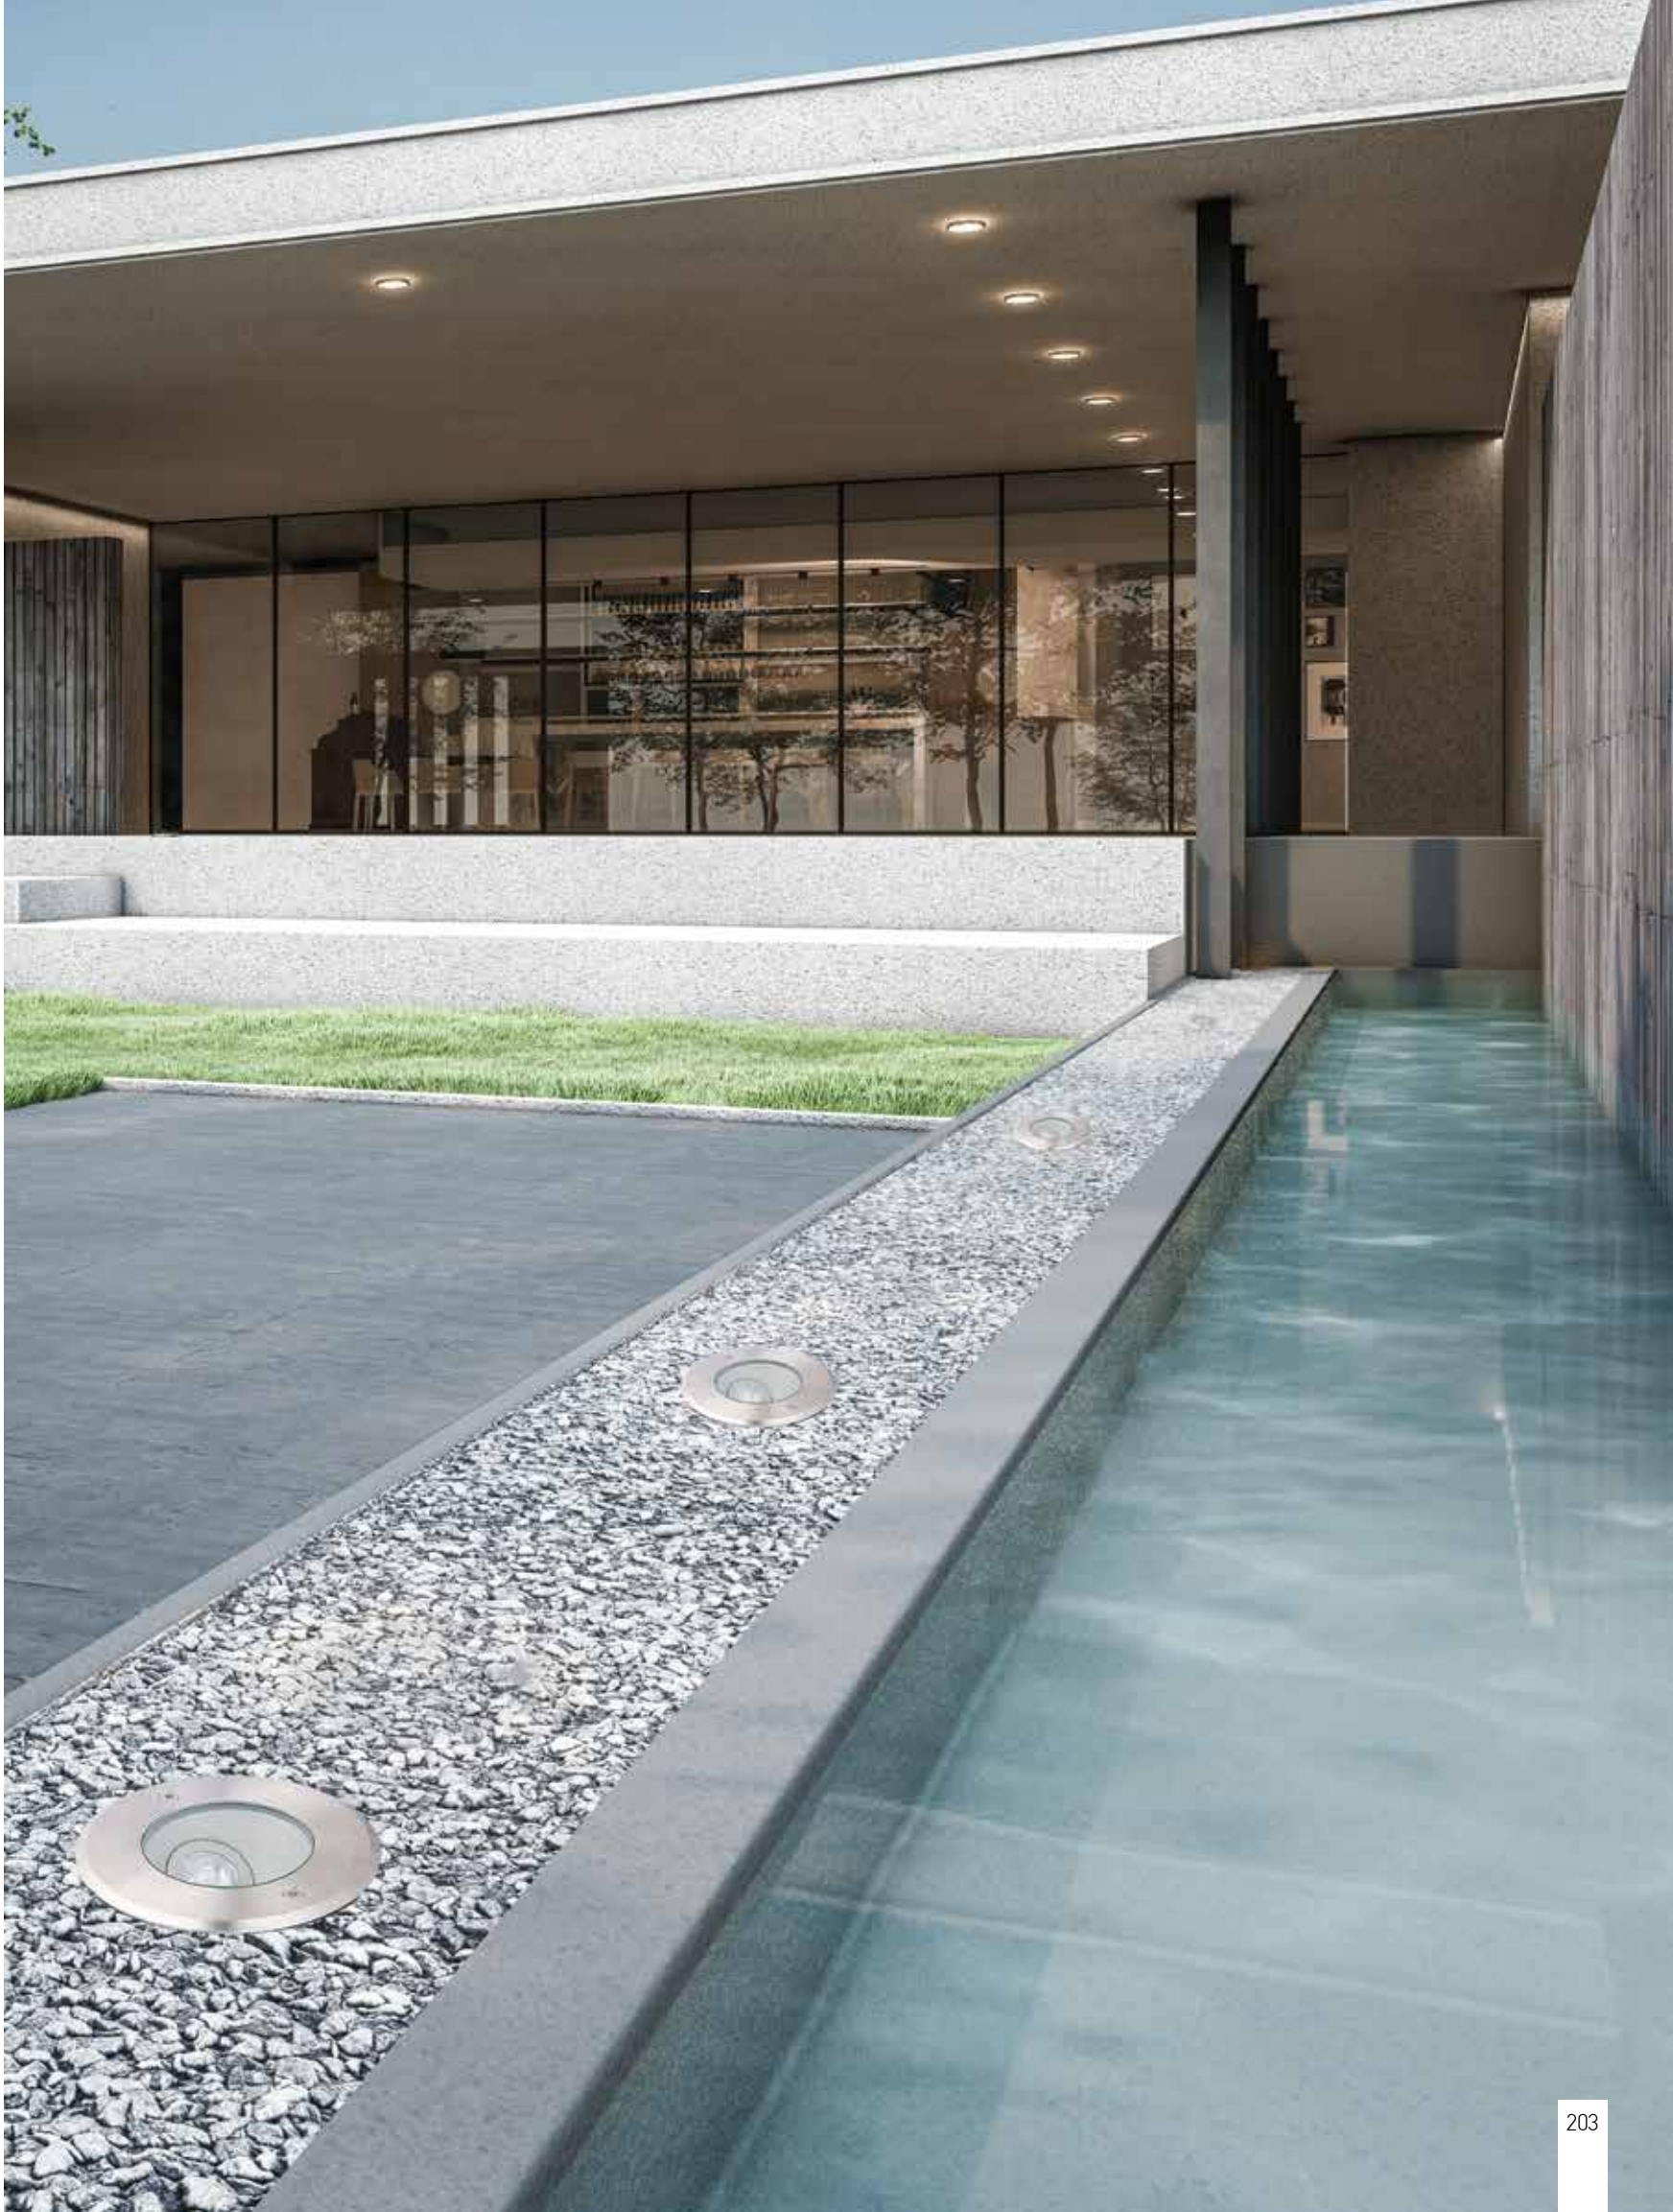




|                    |                                    |
|--------------------|------------------------------------|
| Power              | 0.2W                               |
| Input              | 24V                                |
| Color Temperature  | 3000K                              |
| Lumen              | 23Lm                               |
| Cri                | 80                                 |
| IP                 | 68                                 |
| IK                 | 10                                 |
| Dimensions         | Ø: 1.5cm H: 3.5cm                  |
| Beam Angle         | 45°                                |
| Material           | Stainless Steel - Tempered Glass   |
| Depth Required     | 11 : 5cm                           |
| Special Feature    | 50cm Cable Available               |
| Recommended Driver | D-20-24 (Not Included)             |
| Color              | Stainless Steel / <b>Code E364</b> |




|                   |                                   |
|-------------------|-----------------------------------|
| Power             | 2x 6W                             |
| Input             | 220-240V, 50/60Hz                 |
| Color Temperature | 3000K                             |
| Lumen             | 600Lm                             |
| Cri               | 80                                |
| IP                | 67                                |
| IK                | 10                                |
| Dimensions        | Ø: 20cm H: 4.2cm                  |
| Material          | Aluminium                         |
| Special Feature   | Surface Ground<br>Driver Included |
| Color             | Grey / <b>Code Z69058-B</b>       |




|                   |                                   |
|-------------------|-----------------------------------|
| Power             | 6W                                |
| Input             | 220-240V, 50/60Hz                 |
| Color Temperature | 3000K                             |
| Lumen             | 300Lm                             |
| Cri               | 80                                |
| IP                | 67                                |
| IK                | 10                                |
| Dimensions        | Ø: 20cm H: 4.2cm                  |
| Material          | Aluminium                         |
| Special Feature   | Surface Ground<br>Driver Included |
| Color             | Grey / <b>Code Z69058-A</b>       |







Power 3W  
Input 24V  
Color Temperature 3000K  
Lumen 232Lm  
Cri 80  
IP 65  
IK 8  
Dimensions Ø: 4.5cm H: 9.3cm  
Material Aluminium - Stainless Steel - PC Diffuser  
Depth Required 12cm  
Recessed Mounting Box Included  
Recommended Driver D-20-24 (Not Included)  
Color Aluminium / **Code E178**




Power 3W  
Input 24V  
Color Temperature 3000K  
Lumen 150Lm  
Cri 80  
IP 65  
IK 10  
Dimensions Ø: 4.8cm H: 10cm  
Material Aluminium - Stainless Steel - PC Diffuser  
Depth Required 13cm  
Recessed Mounting Box Included  
Recommended Driver D-20-24 (Not Included)  
Color Aluminium / **Code E180**




Power 3W  
Input 24V  
Color Temperature 3000K  
Lumen 95Lm  
Cri 80  
IP 65  
IK 10  
Dimensions Ø: 4.8cm H: 10cm  
Material Aluminium - Stainless Steel - PC Diffuser  
Depth Required 13cm  
Recessed Mounting Box Included  
Recommended Driver D-20-24 (Not Included)  
Color Aluminium / **Code E179**

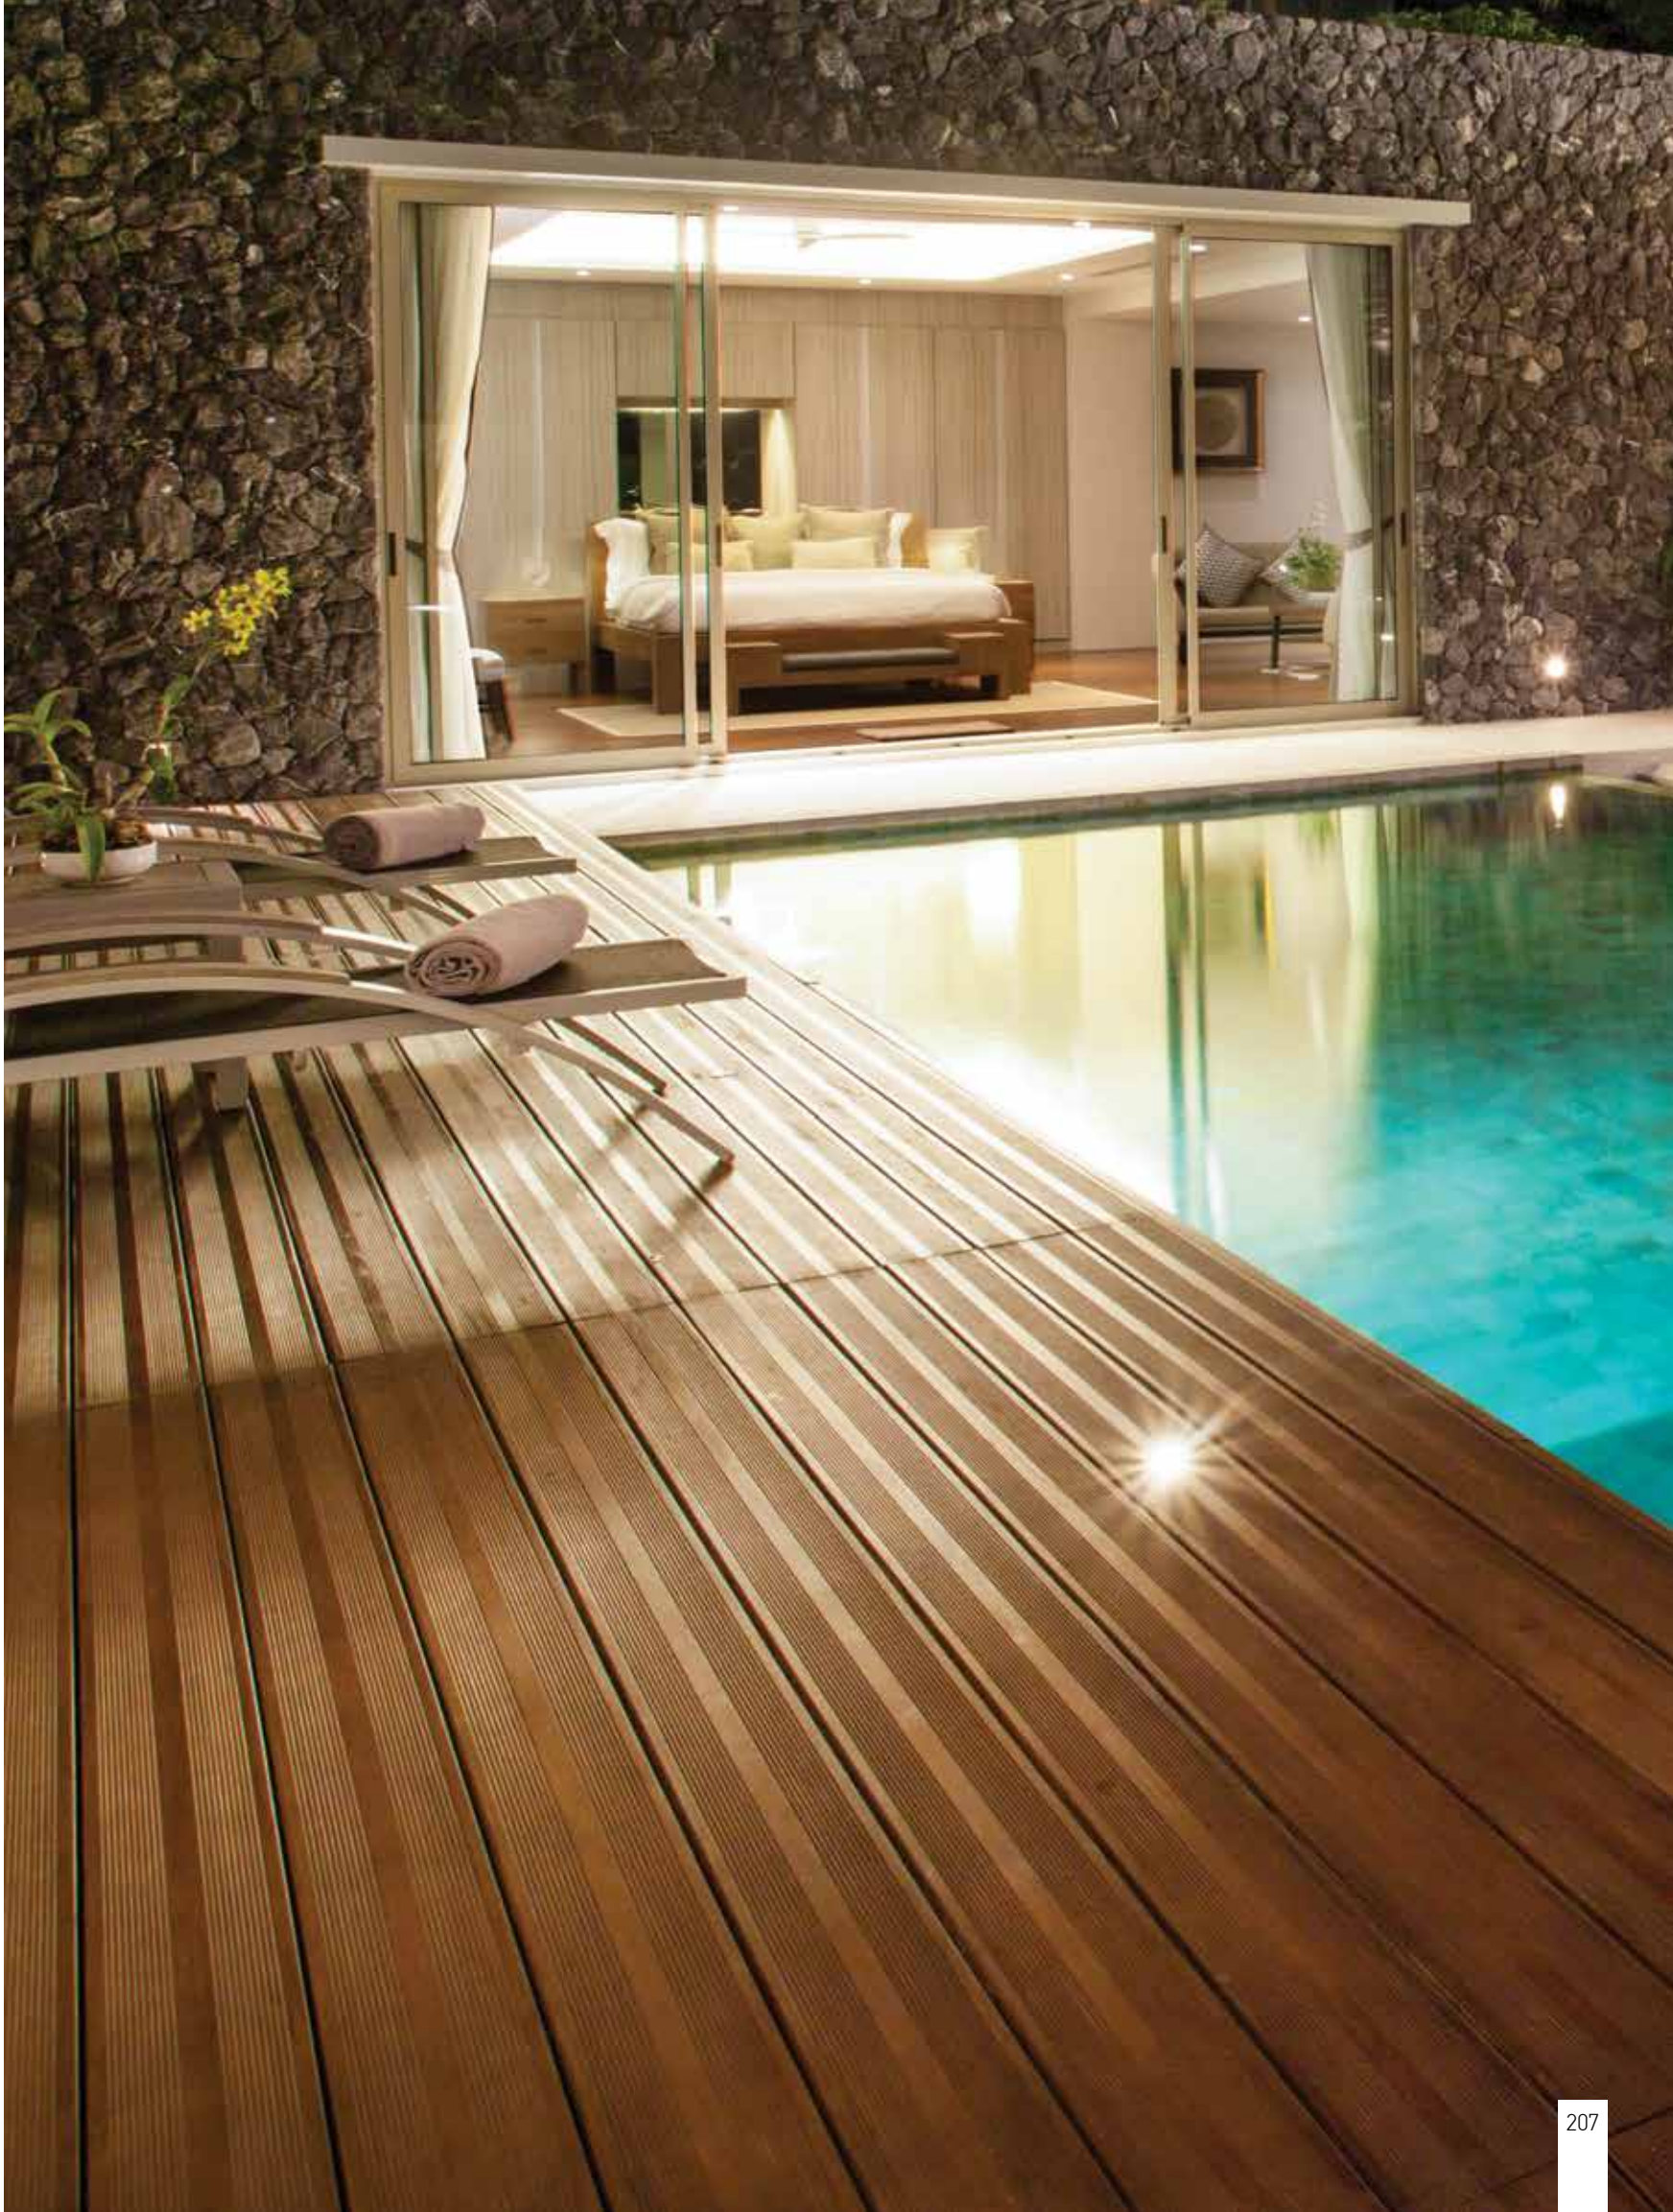

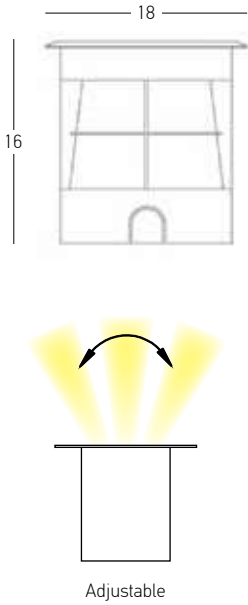

Power 15W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 1200Lm  
Cri 80  
IP 67  
IK 8  
Dimensions Ø: 18cm H: 16cm  
Beam Angle 45°  
Material Stainless Steel - Tempered Glass  
Depth Required 11 : 17cm  
Recessed Mounting Box Included  
Special Feature Externally Adjustable Light on the frame  
50cm Cable Available  
Driver Included


Color Stainless Steel / **Code E361**

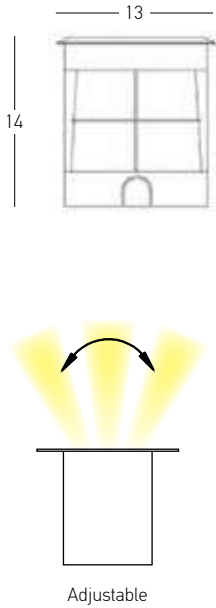


Power 7W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 560Lm  
Cri 80  
IP 67  
IK 8  
Dimensions Ø: 13cm H: 14cm  
Beam Angle 45°  
Material Stainless Steel - Tempered Glass  
Depth Required 11 : 15cm  
Recessed Mounting Box Included  
Special Feature Internal Adjustable Light  
50cm Cable Available  
Driver Included

Color Stainless Steel / **Code E360**







Bulb 1x GU10 LED  
Power 10W MAX  
Input 220-240V, 50/60Hz  
IP 65  
IK 8  
Dimensions Ø: 10cm H: 10cm  
Material Stainless Steel - Tempered Glass  
Depth Required 11cm  
Recessed Mounting Box Included  
Special Feature 50cm Cable Available  
GU10 Lampholder Included  
Color Stainless Steel / **Code E359**






Power 6W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 618Lm  
Cri 80  
IP 67  
IK 8  
Dimensions Ø: 10cm H: 9.5cm  
Beam Angle 36°  
Material Stainless Steel - Tempered Glass  
Depth Required 12cm  
Recessed Mounting Box Included  
Special Feature Driver Included  
Color Stainless Steel / **Code E189**

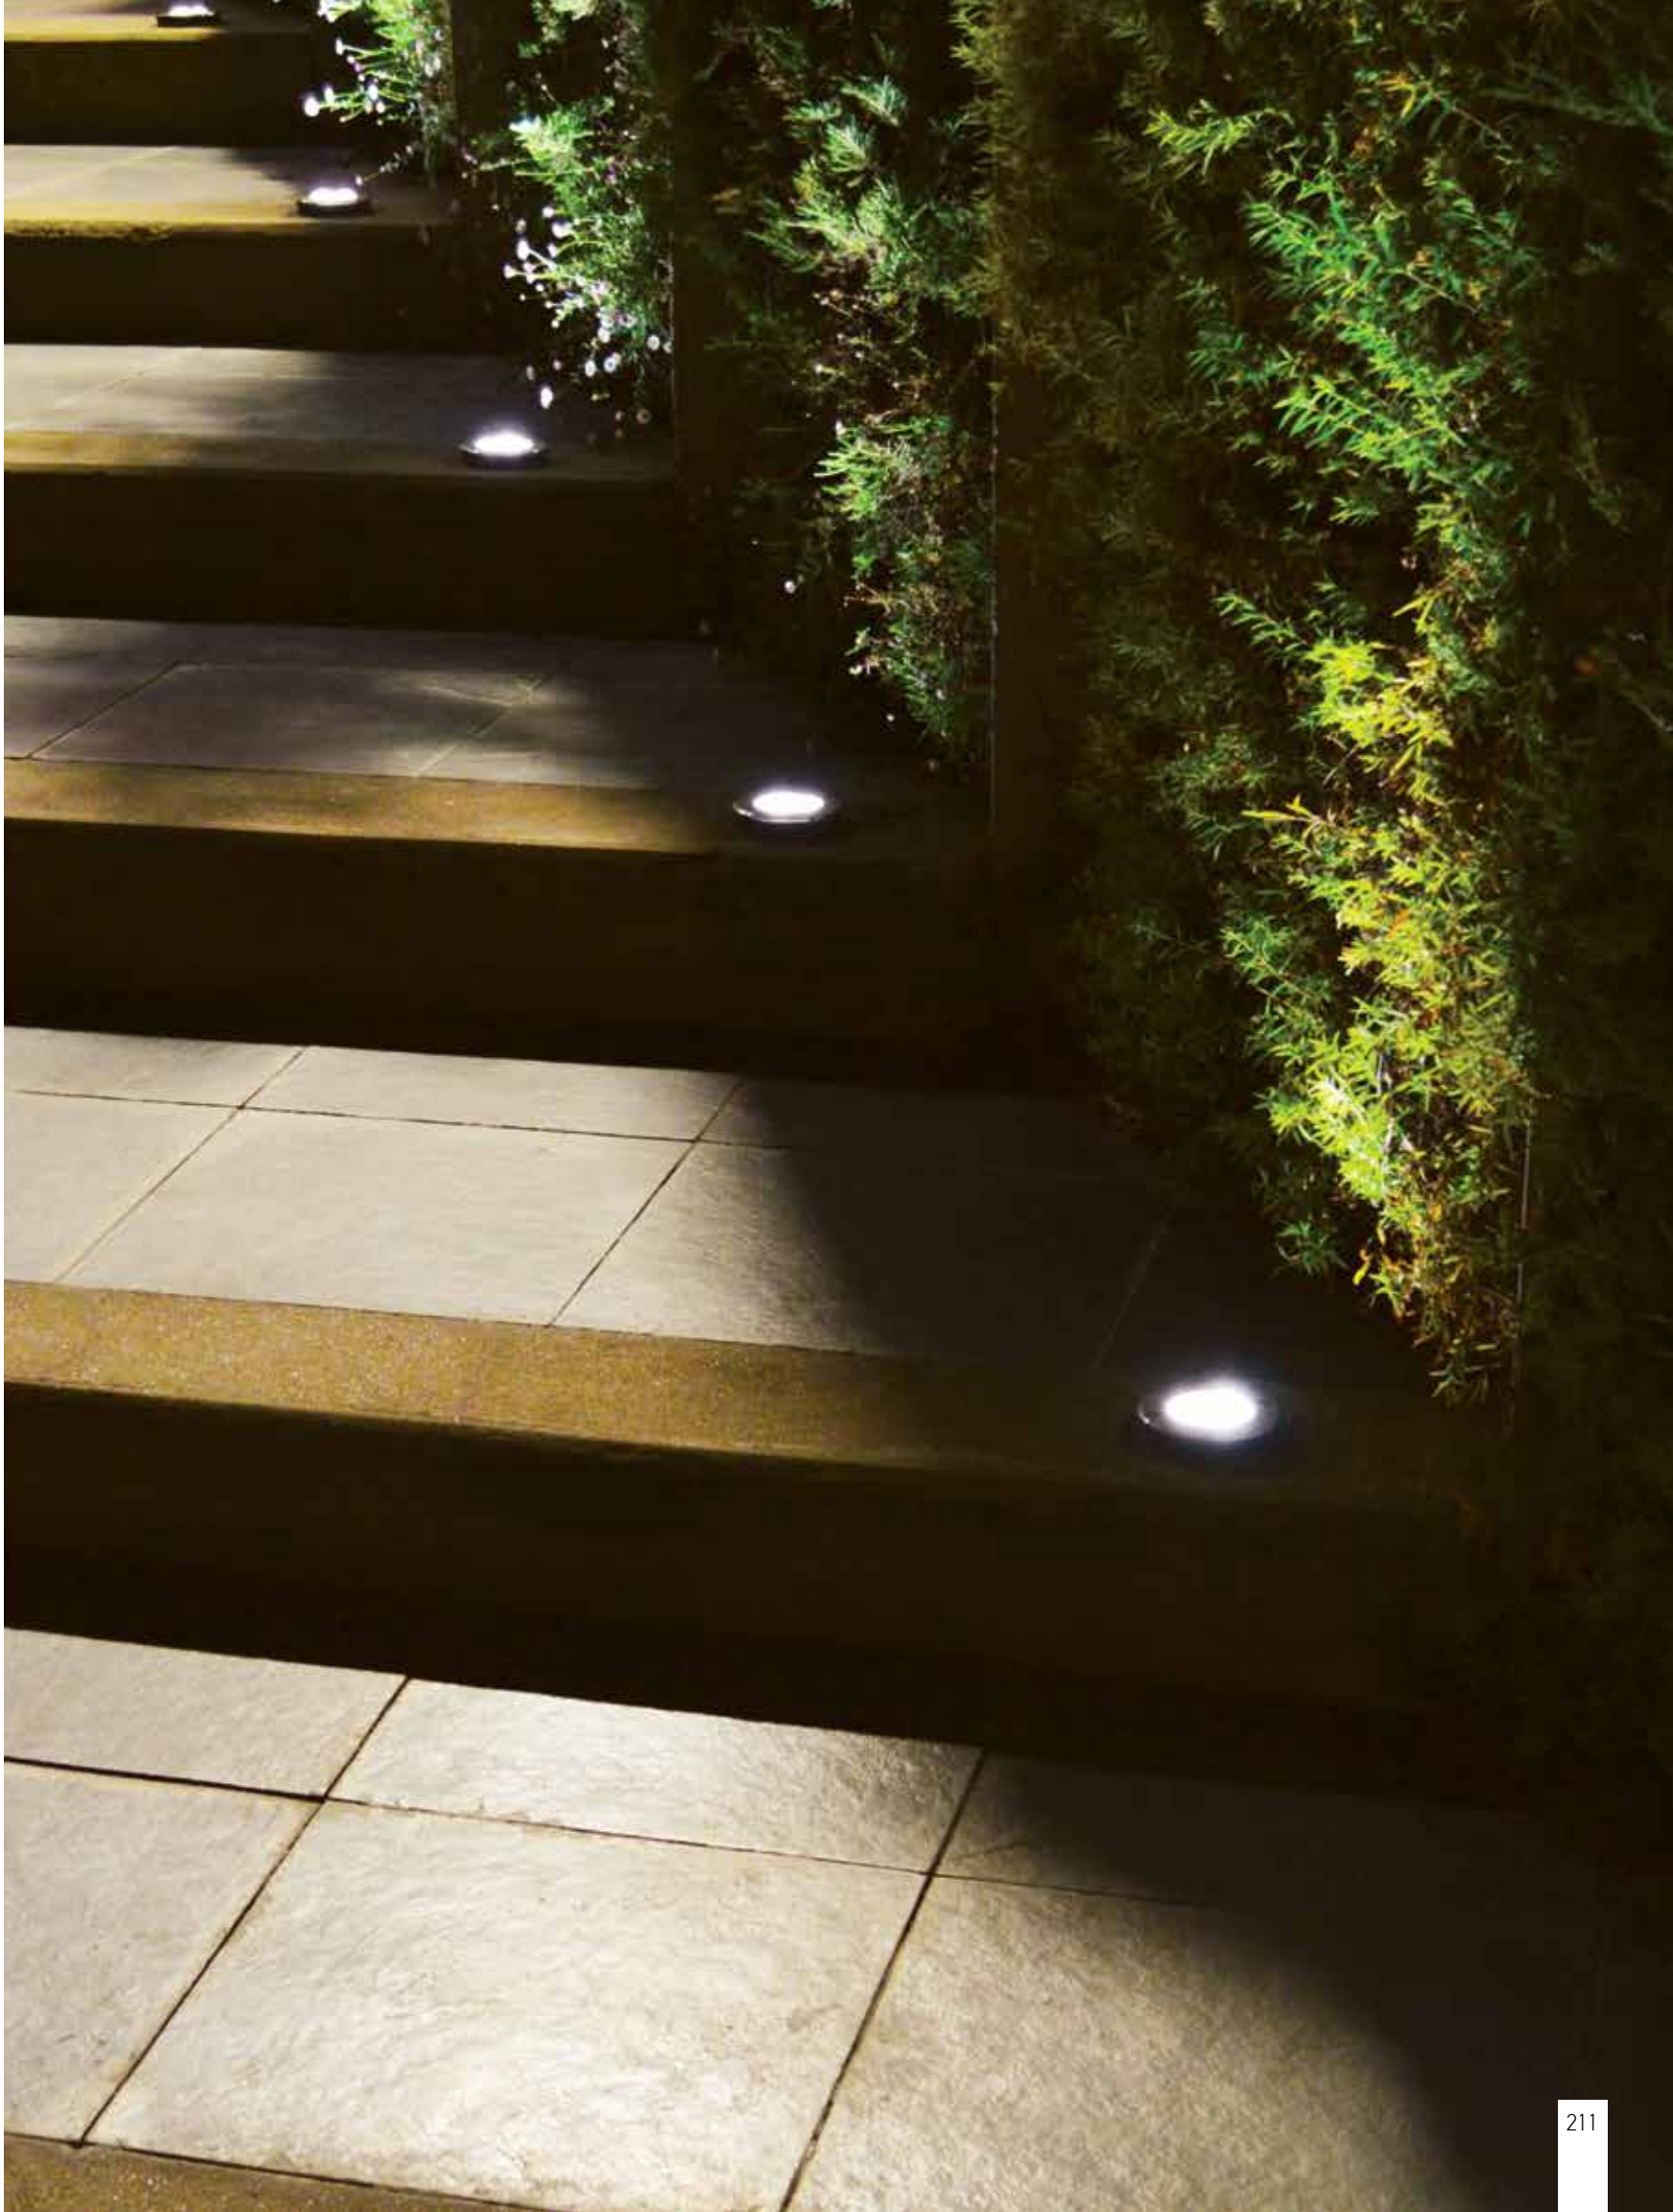

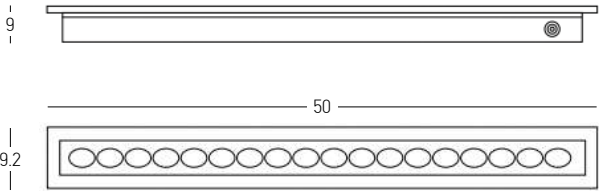


Power 9W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 720Lm  
Cri 80  
IP 67  
IK 10  
Dimensions L: 50cm W: 9.2cm H: 9cm  
Beam Angle 45°  
Material Aluminium - Stainless Steel - Tempered Glass  
Depth Required 11cm  
Recessed Mounting Box Included  
Special Feature 50cm Cable Available  
Driver Included

Color Stainless Steel / **Code E366**

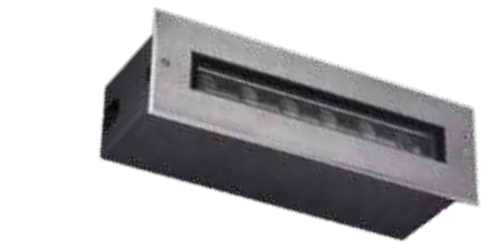

Adjustable

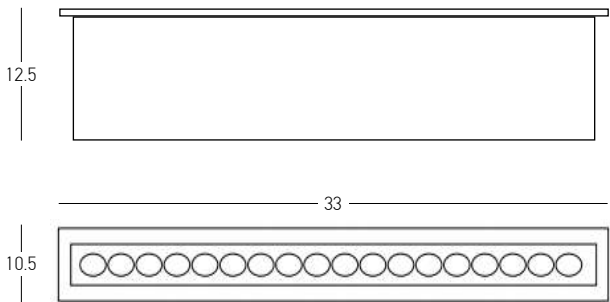

Power 9W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 720Lm  
Cri 80  
IP 67  
IK 10  
Dimensions L: 33cm W: 10.5cm H: 12.5cm  
Beam Angle 45°  
Material Aluminium - Stainless Steel - Tempered Glass  
Depth Required 14.5cm  
Recessed Mounting Box Included  
Special Feature Externally Adjustable Light on the frame  
50cm Cable Available  
Driver Included

Color Stainless Steel / **Code E365**





WALL WASHER | p.214-219

OUTDOOR LIGHTING | WALL WASHER

Wall Washers RGB - RGBW 12W



| Code | IP | Kelvin    | CRI | Watt | Lumen   |
|------|----|-----------|-----|------|---------|
| E380 | 66 | RGB       | 80  | 12W  | MAX 280 |
| E381 | 66 | RGBW 4000 | 80  | 12W  | MAX 480 |



Dimming Options

1. DALI Dimming : Element Driver 24V Up to 240W+OTi DALI DIM 1-4CH  
2. BLUETOOTH Dimming : Element Driver 24V+OT BLE (CASAMBI App)

|                 |                                                               |
|-----------------|---------------------------------------------------------------|
| Power           | 12x 1W                                                        |
| Input           | 24V                                                           |
| Cri             | 80                                                            |
| IP              | 66                                                            |
| Dimensions      | L: 100cm W: 3.3cm H: 2.6cm                                    |
| Beam Angle      | 60° x 10°                                                     |
| Material        | Aluminium                                                     |
| Special Feature | Honeycomb Included<br>Driver Not Included<br>Connect 6pcs MAX |
| Color           | Grey                                                          |

Wall Washer RGB - RGBW 24W



| Code | IP | Kelvin    | CRI | Watt | Lumen   |
|------|----|-----------|-----|------|---------|
| E378 | 66 | RGB       | 80  | 24W  | MAX 560 |
| E379 | 66 | RGBW 4000 | 80  | 24W  | MAX 960 |



Dimming Options

1. DALI Dimming : Element Driver 24V Up to 240W+OTi DALI DIM 1-4CH  
2. BLUETOOTH Dimming : Element Driver 24V+OT BLE (CASAMBI App)

|                 |                                                               |
|-----------------|---------------------------------------------------------------|
| Power           | 24x 1W                                                        |
| Input           | 24V                                                           |
| Cri             | 80                                                            |
| IP              | 66                                                            |
| Dimensions      | L: 100cm W: 3.3cm H: 2.6cm                                    |
| Beam Angle      | 60° x 10°                                                     |
| Material        | Aluminium                                                     |
| Special Feature | Honeycomb Included<br>Driver Not Included<br>Connect 6pcs MAX |
| Color           | Grey                                                          |

Wall Washers Tunable White



| Code | IP | Kelvin      | CRI | Watt | Lumen     |
|------|----|-------------|-----|------|-----------|
| E382 | 66 | 2700 - 6500 | 80  | 24W  | 1580-1770 |
|      |    |             |     |      |           |



Dimming Options

1. DALI Dimming : Element Driver 24V Up to 240W+OTi DALI DIM 1-4CH  
2. BLUETOOTH Dimming : Element Driver 24V+OT BLE (CASAMBI App)

|                 |                                                               |
|-----------------|---------------------------------------------------------------|
| Power           | 24x 1W                                                        |
| Input           | 24V                                                           |
| Cri             | 80                                                            |
| IP              | 66                                                            |
| Dimensions      | L: 100cm W: 3.3cm H: 2.6cm                                    |
| Beam Angle      | 60° x 10°                                                     |
| Material        | Aluminium                                                     |
| Special Feature | Honeycomb Included<br>Driver Not Included<br>Connect 6pcs MAX |
| Color           | Grey                                                          |

|  |                            |
|--|----------------------------|
|  | OTi DALI DIM 1-4CH         |
|  | Input                      |
|  | Output                     |
|  | Dimensions                 |
|  | DALI Dimming               |
|  | Material                   |
|  | Special Feature            |
|  | Color                      |
|  | 24V                        |
|  | Up to 240W                 |
|  | W: 4.2cm H: 2cm L: 18cm    |
|  | ○                          |
|  | Plastic                    |
|  | IP 20                      |
|  | White / Code 4062172166010 |



|                          |                      |
|--------------------------|----------------------|
| Connectors Male & Female |                      |
| Cable                    | 25cm                 |
| Input                    | 24V                  |
| IP                       | 66                   |
| Color                    | Black / Code CNCTR 2 |



Wall Washers 12W



| Code | IP | Kelvin | CRI | Watt | Lumen   |
|------|----|--------|-----|------|---------|
| E376 | 66 | 3000   | 80  | 12W  | MAX 850 |
| E377 | 66 | 4000   | 80  | 12W  | MAX 870 |



Dimming Options

- 1. DALI Dimming : Dali Driver 24V Channel 1+Switch Dali MCU
- 2. 1-10 Dimming : 1-10V Driver 24V
- 3. PUSH BUTTON Dimming : Dali Driver 24V Channel 1
- 4. ON-OFF Dimming : ON-OFF Driver 24V

|                 |                                                                |
|-----------------|----------------------------------------------------------------|
| Power           | 12x1W                                                          |
| Input           | 24V                                                            |
| Cri             | 80                                                             |
| IP              | 66                                                             |
| Dimensions      | L: 50cm W: 3.3cm H: 2.6cm                                      |
| Beam Angle      | 60° x 10°                                                      |
| Material        | Aluminium                                                      |
| Special Feature | Honeycomb Included<br>Driver Not Included<br>Connect 12pcs MAX |
| Color           | Grey                                                           |

Wall Washers 24W



| Code | IP | Kelvin | CRI | Watt | Lumen    |
|------|----|--------|-----|------|----------|
| E374 | 66 | 3000   | 80  | 24W  | MAX 1700 |
| E375 | 66 | 4000   | 80  | 24W  | MAX 1720 |



Dimming Options

- 1. DALI Dimming : Dali Driver 24V Channel 1+Switch Dali MCU
- 2. 1-10 Dimming : 1-10V Driver 24V
- 3. PUSH BUTTON Dimming : Dali Driver 24V Channel 1
- 4. ON-OFF Dimming : ON-OFF Driver 24V

|                 |                                                               |
|-----------------|---------------------------------------------------------------|
| Power           | 24x1W                                                         |
| Input           | 24V                                                           |
| Cri             | 80                                                            |
| IP              | 66                                                            |
| Dimensions      | L: 100cm W: 3.3cm H: 2.6cm                                    |
| Beam Angle      | 60° x 10°                                                     |
| Material        | Aluminium                                                     |
| Special Feature | Honeycomb Included<br>Driver Not Included<br>Connect 6pcs MAX |
| Color           | Grey                                                          |



|                          |                      |
|--------------------------|----------------------|
| Connectors Male & Female |                      |
| Cable                    | 25cm                 |
| Input                    | 24V                  |
| IP                       | 66                   |
| Color                    | Black / Code CNCTR 1 |



OUTDOOR LIGHTING | 24V DRIVERS

Power 30W  
Input 220-240V, 50/60Hz  
Output 24V  
Dimensions W: 4.1cm H: 2.7cm L: 14.5cm  
Non Dimmable ☒ On-Off  
ELEMENT 30/220-240/24 G2  
Material Plastic  
Special Feature IP 20  
Color White / **Code 4052899605503**



Power 60W  
Input 220-240V, 50/60Hz  
Output 24V  
Dimensions W: 4.1cm H: 3.1cm L: 20.1cm  
Non Dimmable ☒ On-Off  
ELEMENT 60/220-240/24 G2  
Material Plastic  
Special Feature IP 20  
Color White / **Code 4052899605527**



Power 120W  
Input 220-240V, 50/60Hz  
Output 24V  
Dimensions W: 4.1cm H: 3.1cm L: 26cm  
Non Dimmable ☒ On-Off  
ELEMENT 120/220-240/24 G2  
Material Plastic  
Special Feature IP 20  
Color White / **Code 4052899605541**



Power 180W  
Input 220-240V, 50/60Hz  
Output 24V  
Dimensions W: 4cm H: 3.1cm L: 30cm  
Non Dimmable ☒ On-Off  
ELEMENT 180/220-240/24 G2  
Material Plastic  
Special Feature IP 20  
Color White / **Code 4052899605565**



Power 250W  
Input 220-240V, 50/60Hz  
Output 24V  
Dimensions W: 3.5cm H: 5cm L: 37.5cm  
Non Dimmable ☒ On-Off  
ELEMENT 250/220-240/24 G2  
Material Plastic  
Special Feature IP 20  
Color White / **Code 4062172333467**



Power 30W  
Input 220-240V, 50/60Hz  
Output 24V  
Dimensions W: 6.7cm H: 3cm L: 10.3cm  
DALI Dimming ○ Push Button - DALI2  
1 CHANNEL  
Material Plastic  
Special Feature IP 20  
Color White / **Code 4062172329767**




Power 50W  
Input 220-240V, 50/60Hz  
Output 24V  
Dimensions W: 3.2cm H: 2.2cm L: 34.6cm  
DALI Dimming ○ Push Button - DALI2  
1 CHANNEL  
Material Plastic  
Special Feature IP 20  
Color White / **Code 4062172274340**



Power 160W  
Input 220-240V, 50/60Hz  
Output 24V  
Dimensions W: 5cm H: 3.5cm L: 30cm  
DALI Dimming ○ Push Button - DALI2  
1 CHANNEL  
Material Plastic  
Special Feature IP 20  
Color White / **Code 4062172274388**



Power 240W  
Input 220-240V, 50/60Hz  
Dimensions W: 4.2cm H: 2cm L: 17.2cm  
Bluetooth Dimming ○  
OT BLE DIM 0-100%  
Material Plastic  
Special Feature IP 20  
Color White / **Code 4052899557833**



Power 80W  
Input 220-240V, 50/60Hz  
Output 24V  
Dimensions W: 3.2cm H: 2.2cm L: 34.6cm  
DALI Dimming ○ Push Button - DALI2  
1 CHANNEL  
Material Plastic  
Special Feature IP 20  
Color White / **Code 4062172274364**



Power 182W  
Input 220-240V, 50/60Hz  
Dimensions W: 4.2cm H: 2cm L: 17.2cm  
DMX Dimming ○  
OT DMX RGBW DIM 0-100%  
Material Plastic  
Special Feature IP 20  
Color White / **Code 4052899557949**



Input 220-240V, 50/60Hz  
Dimensions W: 5cm H: 8cm L: 8cm  
DALI Dimming ○  
DALI MCU Tunable White Switch  
Material Plastic  
Special Feature IP 20  
Color White / **Code 4052899465916**



Power 100W  
Input 220-240V, 50/60Hz  
Output 24V  
Dimensions W: 5cm H: 3cm L: 23cm  
Dimmable Triac , 1-10 ○  
Material Metal  
Special Feature IP 20  
Color Metal / **Code Z89100VND**




Power 200W  
Input 220-240V, 50/60Hz  
Output 24V  
Dimensions W: 5cm H: 3cm L: 28.7cm  
Dimmable Triac , 1-10 ○  
Material Metal  
Special Feature IP 20  
Color Metal / **Code Z89200VND**



|           |     |          |     |      |     |      |     |               |     |
|-----------|-----|----------|-----|------|-----|------|-----|---------------|-----|
| CNCTR 1   | 218 | E208     | 66  | E283 | 152 | E341 | 116 | 4052899465916 | 221 |
| CNCTR 2   | 216 | E211     | 70  | E284 | 142 | E342 | 118 | 4052899557833 | 221 |
| D-20-24   | 132 | E216     | 112 | E285 | 140 | E343 | 114 | 4052899557949 | 221 |
| V350-1050 | 138 | E217     | 162 | E286 | 140 | E344 | 28  | 4052899605503 | 220 |
| Z0800-BA  | 132 | E219     | 194 | E287 | 82  | E345 | 28  | 4052899605527 | 220 |
| Z69058-A  | 204 | E220     | 194 | E288 | 170 | E346 | 174 | 4052899605541 | 220 |
| Z69058-B  | 204 | E227     | 99  | E289 | 16  | E347 | 174 | 4052899605565 | 220 |
| Z89100VND | 221 | E229     | 180 | E290 | 16  | E348 | 62  | 4062172166010 | 216 |
| Z89200VND | 221 | E230     | 181 | E291 | 16  | E349 | 136 | 4062172274340 | 221 |
| E109      | 101 | E235     | 74  | E292 | 148 | E350 | 136 | 4062172274364 | 221 |
| E114      | 95  | E235-12D | 74  | E293 | 149 | E351 | 26  | 4062172274388 | 221 |
| E121      | 104 | E236     | 74  | E294 | 179 | E352 | 26  | 4062172329767 | 220 |
| E122      | 104 | E237     | 40  | E295 | 56  | E353 | 22  | 4062172333467 | 220 |
| E123      | 104 | E238     | 86  | E296 | 122 | E354 | 30  |               |     |
| E124      | 104 | E239     | 86  | E297 | 24  | E355 | 36  |               |     |
| E127      | 102 | E240     | 86  | E298 | 52  | E356 | 32  |               |     |
| E128      | 102 | E241-G   | 178 | E299 | 156 | E357 | 34  |               |     |
| E132      | 58  | E241-W   | 178 | E300 | 170 | E358 | 34  |               |     |
| E133      | 58  | E242-G   | 178 | E301 | 170 | E359 | 210 |               |     |
| E135      | 100 | E242-W   | 178 | E302 | 54  | E360 | 208 |               |     |
| E146      | 98  | E243     | 92  | E304 | 110 | E361 | 208 |               |     |
| E149      | 102 | E245     | 92  | E305 | 110 | E362 | 202 |               |     |
| E150      | 106 | E246-G   | 176 | E306 | 106 | E363 | 202 |               |     |
| E151      | 106 | E246-W   | 176 | E307 | 106 | E364 | 204 |               |     |
| E152      | 145 | E247-G   | 176 | E308 | 194 | E365 | 212 |               |     |
| E153      | 144 | E247-W   | 176 | E309 | 194 | E366 | 212 |               |     |
| E156      | 100 | E248     | 185 | E310 | 162 | E367 | 36  |               |     |
| E159      | 101 | E249     | 40  | E311 | 160 | E368 | 22  |               |     |
| E168      | 112 | E250     | 76  | E312 | 160 | E369 | 10  |               |     |
| E177-A    | 146 | E250-12D | 76  | E313 | 12  | E370 | 10  |               |     |
| E177-B    | 146 | E251     | 76  | E314 | 12  | E371 | 10  |               |     |
| E178      | 206 | E253     | 46  | E315 | 80  | E372 | 132 |               |     |
| E179      | 206 | E254     | 46  | E316 | 81  | E373 | 132 |               |     |
| E180      | 206 | E256     | 70  | E317 | 81  | E374 | 218 |               |     |
| E181      | 182 | E257     | 70  | E318 | 94  | E375 | 218 |               |     |
| E182      | 182 | E261     | 98  | E319 | 166 | E376 | 218 |               |     |
| E183      | 182 | E262     | 98  | E320 | 166 | E377 | 218 |               |     |
| E184      | 182 | E263     | 120 | E321 | 166 | E378 | 216 |               |     |
| E185      | 108 | E265     | 126 | E322 | 168 | E379 | 216 |               |     |
| E186      | 108 | E266     | 126 | E323 | 172 | E380 | 216 |               |     |
| E187      | 184 | E267     | 128 | E324 | 172 | E381 | 216 |               |     |
| E189      | 210 | E268     | 124 | E325 | 38  | E382 | 216 |               |     |
| E190      | 44  | E269     | 196 | E326 | 198 | E383 | 42  |               |     |
| E191      | 44  | E270     | 196 | E327 | 198 | E384 | 42  |               |     |
| E192      | 44  | E271     | 124 | E328 | 134 | E398 | 14  |               |     |
| E193      | 18  | E272     | 89  | E329 | 134 | E399 | 14  |               |     |
| E194      | 18  | E273     | 84  | E330 | 134 | E400 | 14  |               |     |
| E195      | 96  | E274     | 88  | E331 | 134 | E401 | 15  |               |     |
| E197      | 90  | E275     | 116 | E332 | 188 | E402 | 15  |               |     |
| E199      | 91  | E276     | 60  | E333 | 188 | E403 | 138 |               |     |
| E201      | 122 | E277     | 60  | E334 | 48  | E404 | 138 |               |     |
| E202      | 122 | E278     | 85  | E335 | 48  | S112 | 192 |               |     |
| E203      | 50  | E279     | 154 | E336 | 48  | S113 | 192 |               |     |
| E204      | 50  | E280     | 158 | E337 | 72  | S131 | 190 |               |     |
| E205      | 68  | E281     | 150 | E338 | 64  | S132 | 190 |               |     |
| E206      | 68  | E282     | 150 | E339 | 64  | S133 | 190 |               |     |
| E207      | 66  | E282-SP  | 150 | E340 | 192 | S134 | 190 |               |     |



ZAMPELIS S.A.  
Greece , Attica , Keratea , Kivouri  
Postal: 19001 , P.O. box: 4791  
Tel.: (+30) 22990 63518-19 | Fax: (+30) 22990 63521  
info@zambelislights.gr | zambelislights.gr



ZAMPELIS S.A.

Greece , Attica , Keratea , Kivouri

Postal: 19001 , P.O. box: 4791

Tel.: (+30) 22990 63518-19 | Fax: (+30) 22990 63521

[info@zambelislights.gr](mailto:info@zambelislights.gr) | [zambelislights.gr](http://zambelislights.gr)

